Downloaded from orbit.dtu.dk on: Apr 19, 2024

DTU Library

Strip detector for nanoscale resolution

Olsen, Ulrik Lund; Schmidt, Søren; Poulsen, Henning Friis; Yvind, Kresten; Ottaviano, Luisa

Publication date:
2009

Link back to DTU Orbit

Citation (APA):
Olsen, U. L. (Author), Schmidt, S. (Author), Poulsen, H. F. (Author), Yvind, K. (Author), & Ottaviano, L. (Author). (2009). Strip detector for nanoscale resolution. Sound/Visual production (digital)

General rights
Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

The 3D x-ray nano-detector

Risø DTU: Ulrik Lund Olsen, Søren Schmidt, Henning Friis Poulsen
DTU Photonics: Kresten Yvind, Luisa Ottaviano

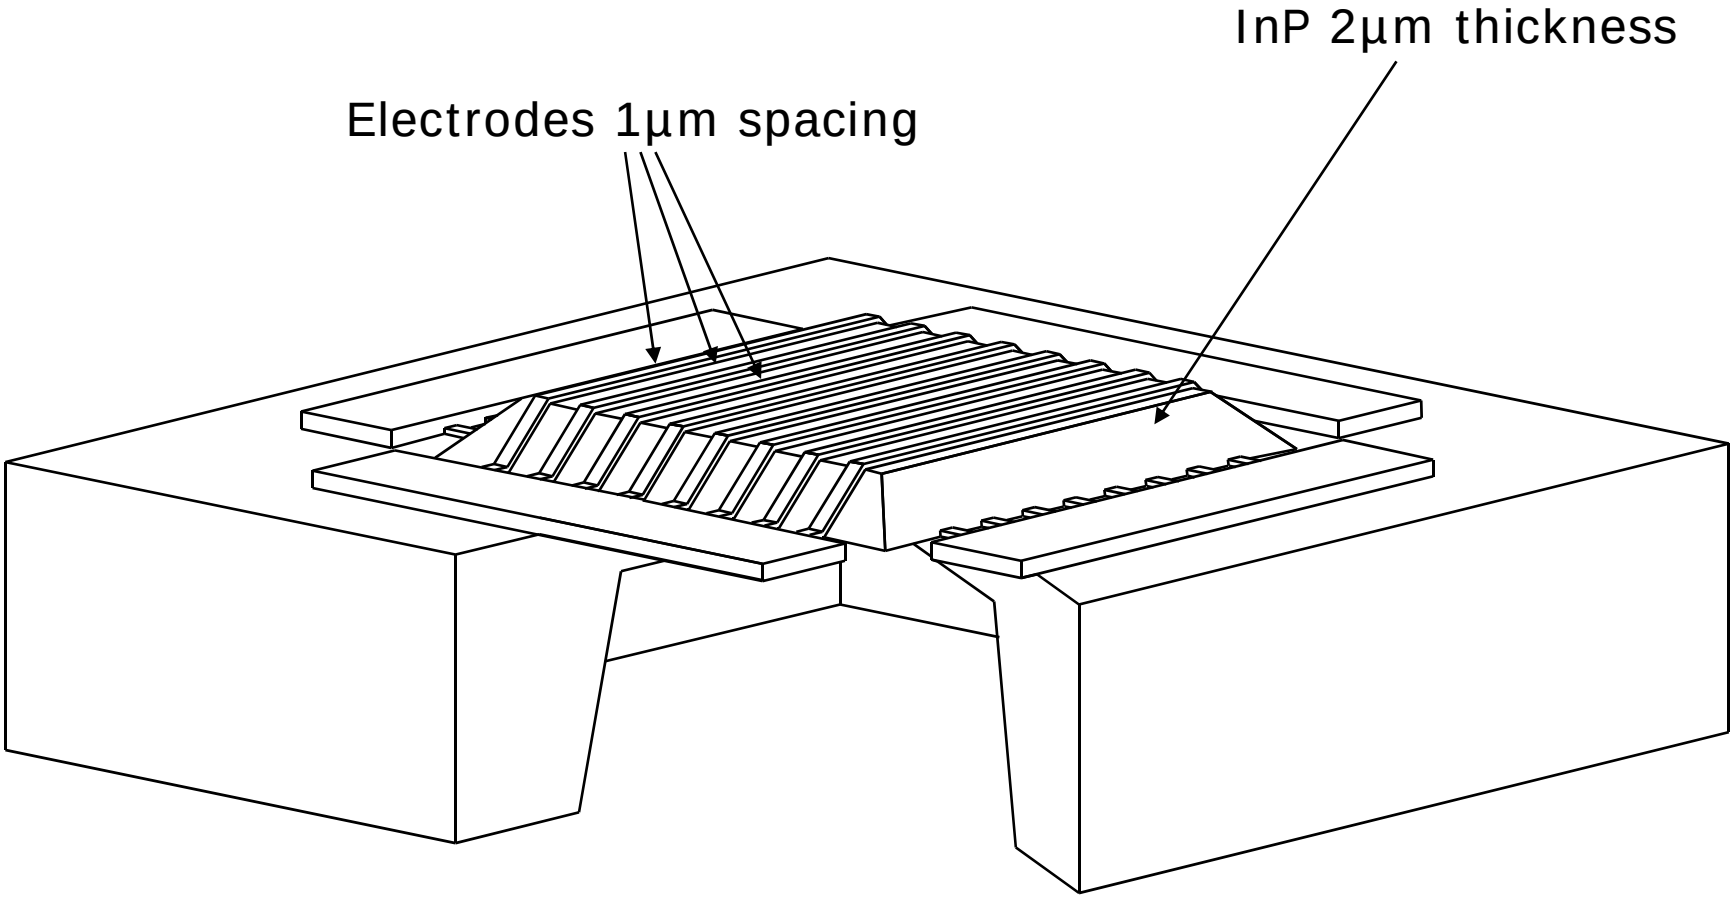

High resolution detectors - why

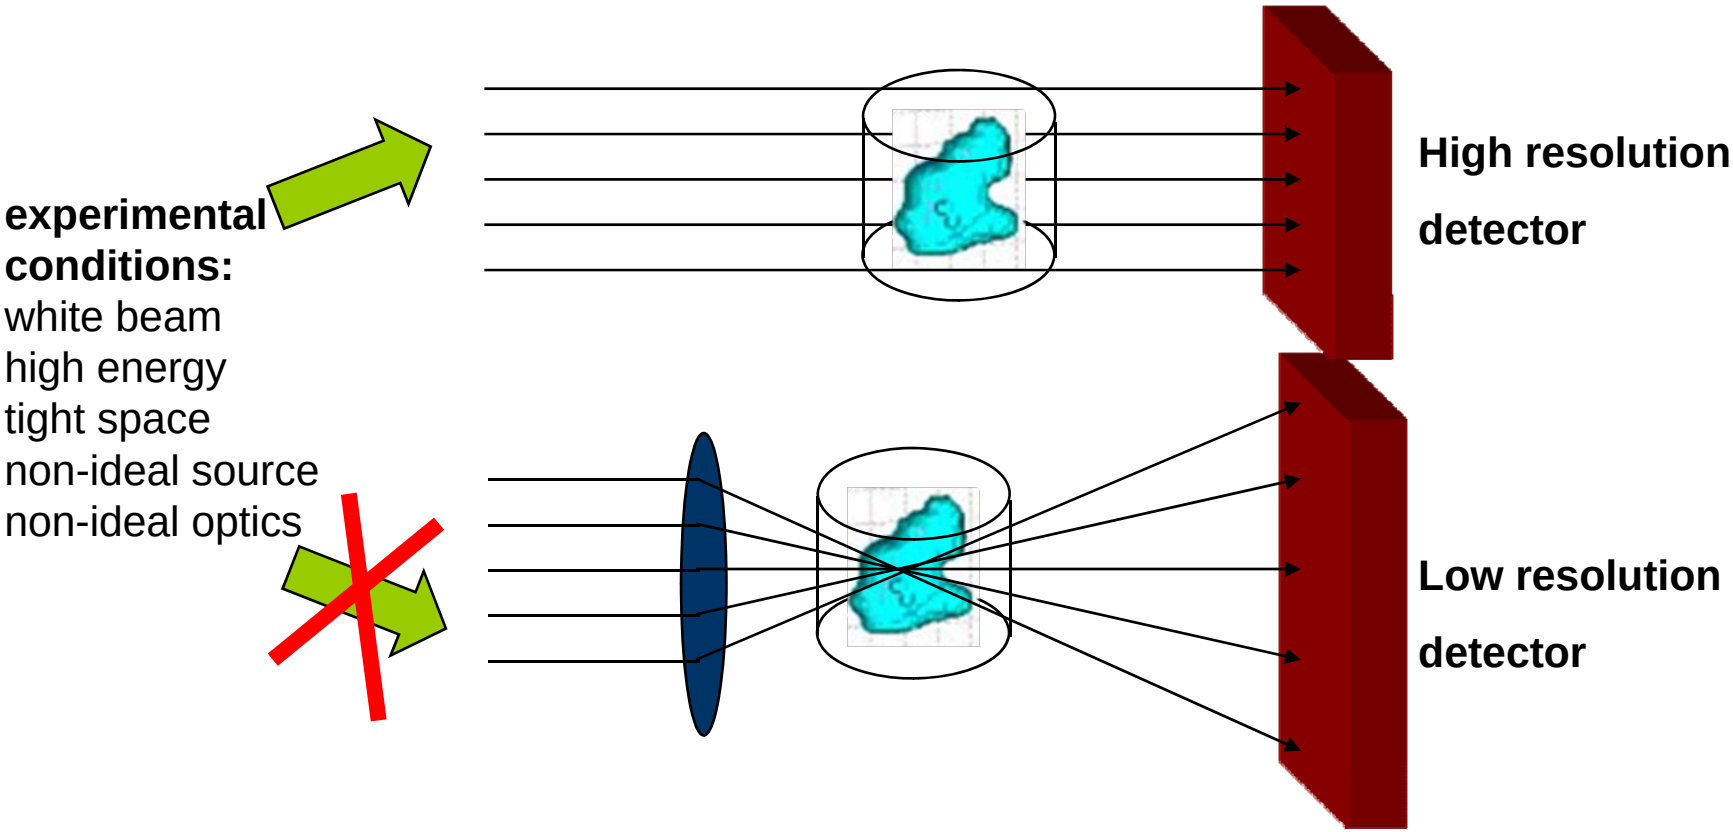

3DXRD set-up @ ID11, ESRF

30-80 keV x-rays

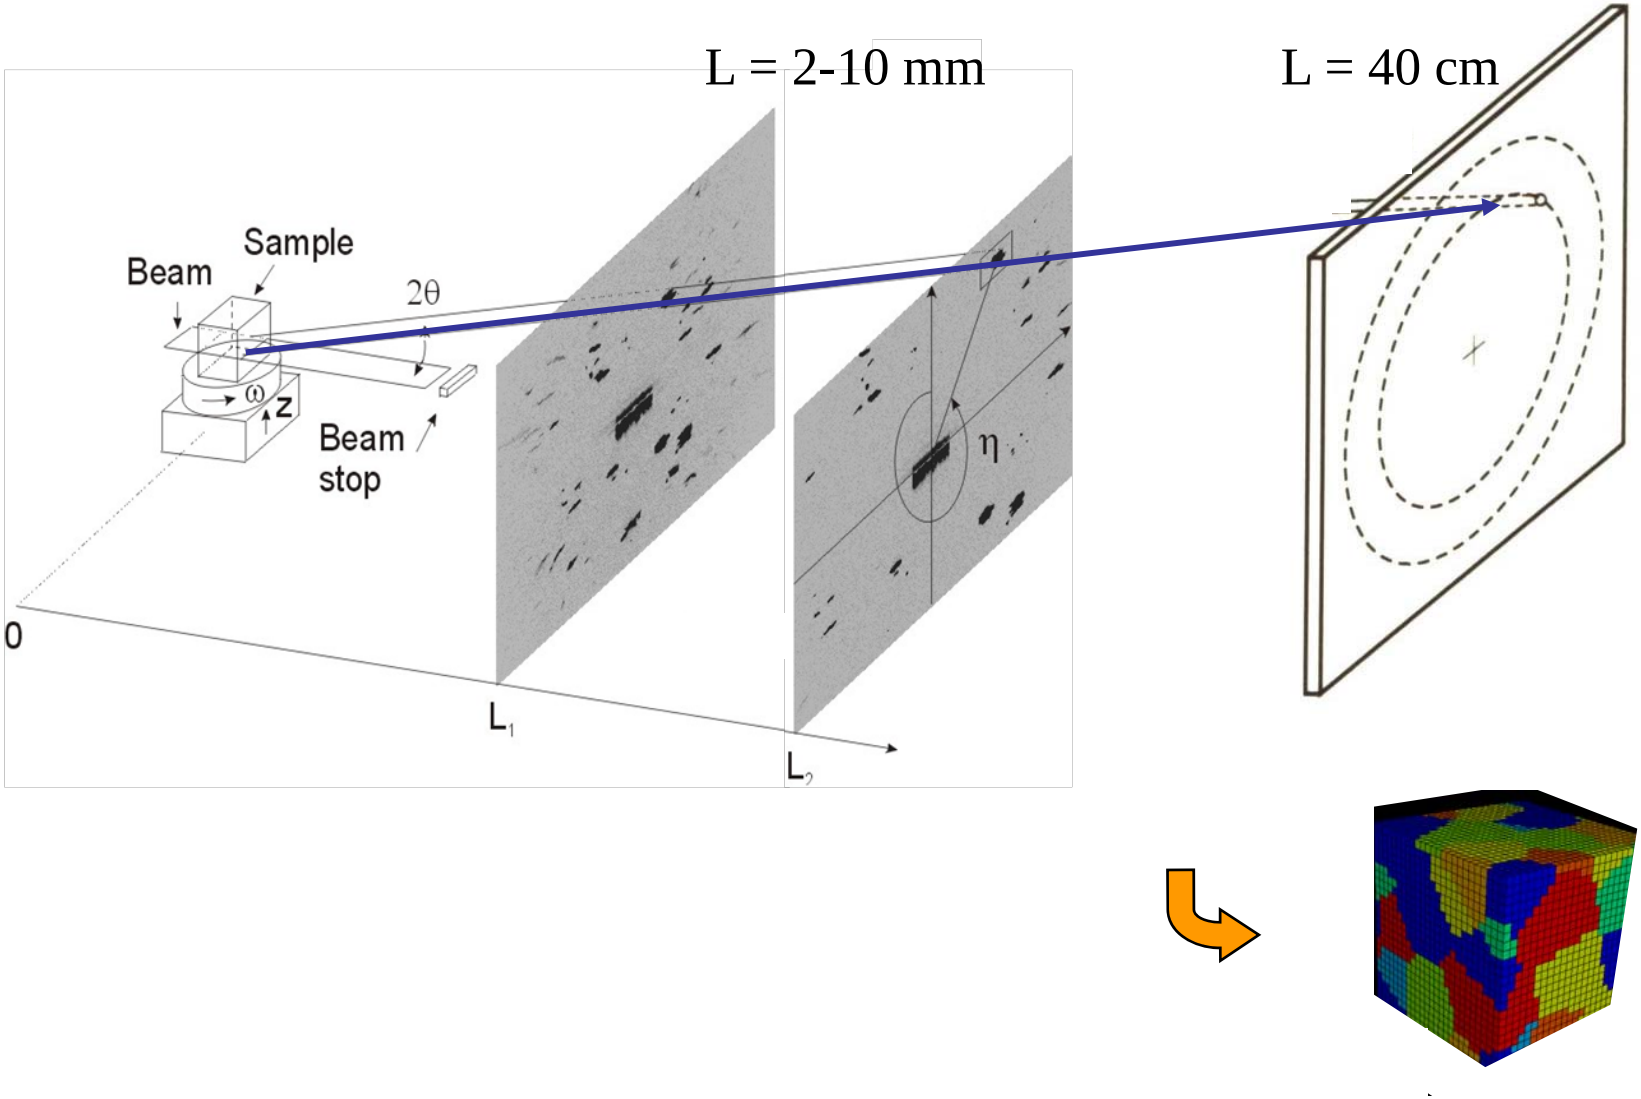

Structured scintillator project

Collab with: KTH , Sweden: X. Badel, J. Linros
ESRF: T. Martin, V. Honkimaki, M. diMichiel

structured scintillators /planar scintillators

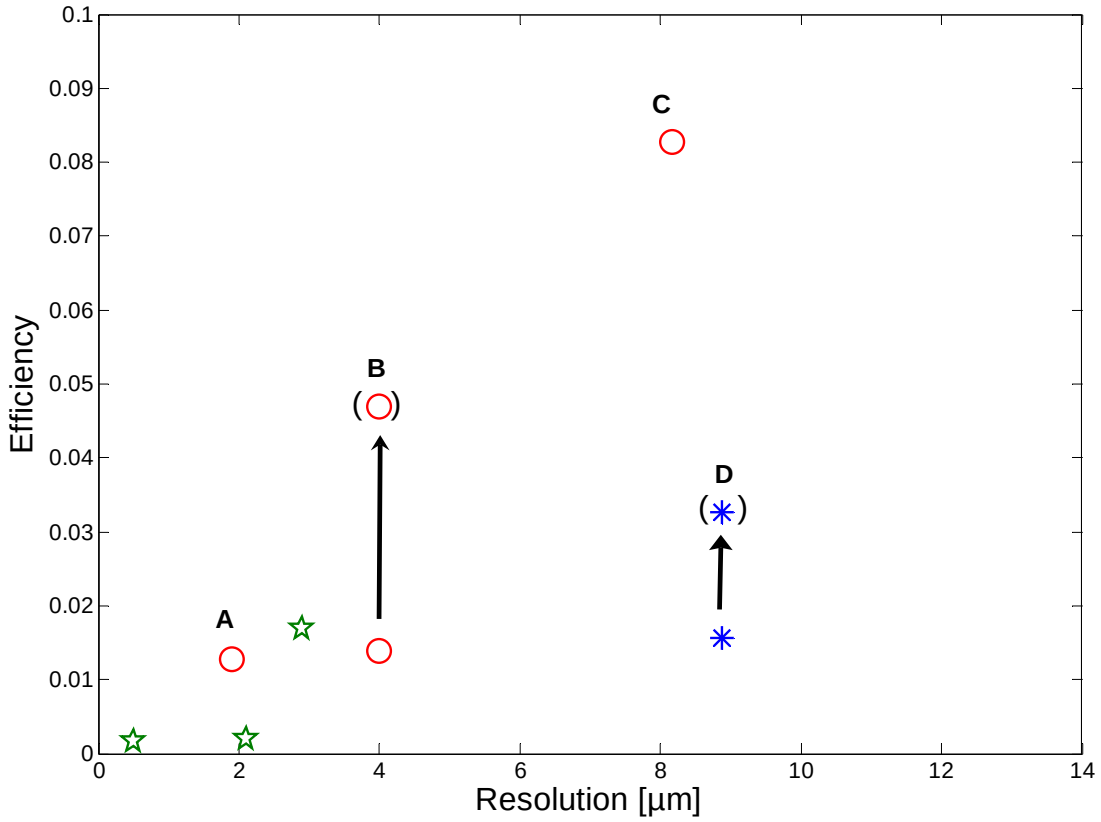

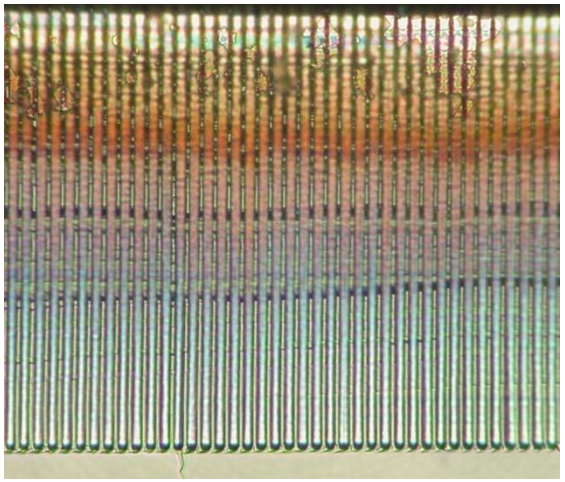

Limitation 1 µm ➡ Nanodetector

sensor design

- 1mm^2 active area
- 1µm pitch of electrodes
- 2 orthogonal sets of parallel electrodes
- Electrode dimensions ~50nmX100nmX1mm
- Sensor thickness 2µm -> 10%@10keV

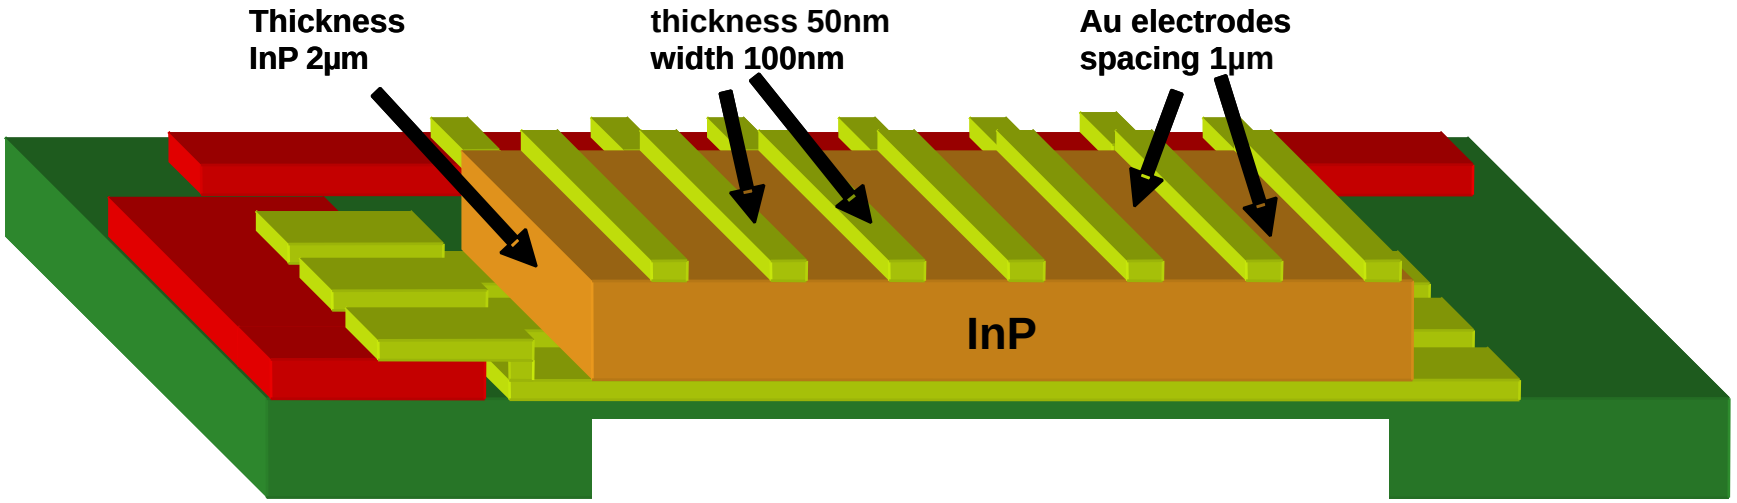

1st order simulation of spatial resolution –e/h pair generation

X-ray absorption simulated by MCNP.

2µm thick sensor
10 keV X-rays

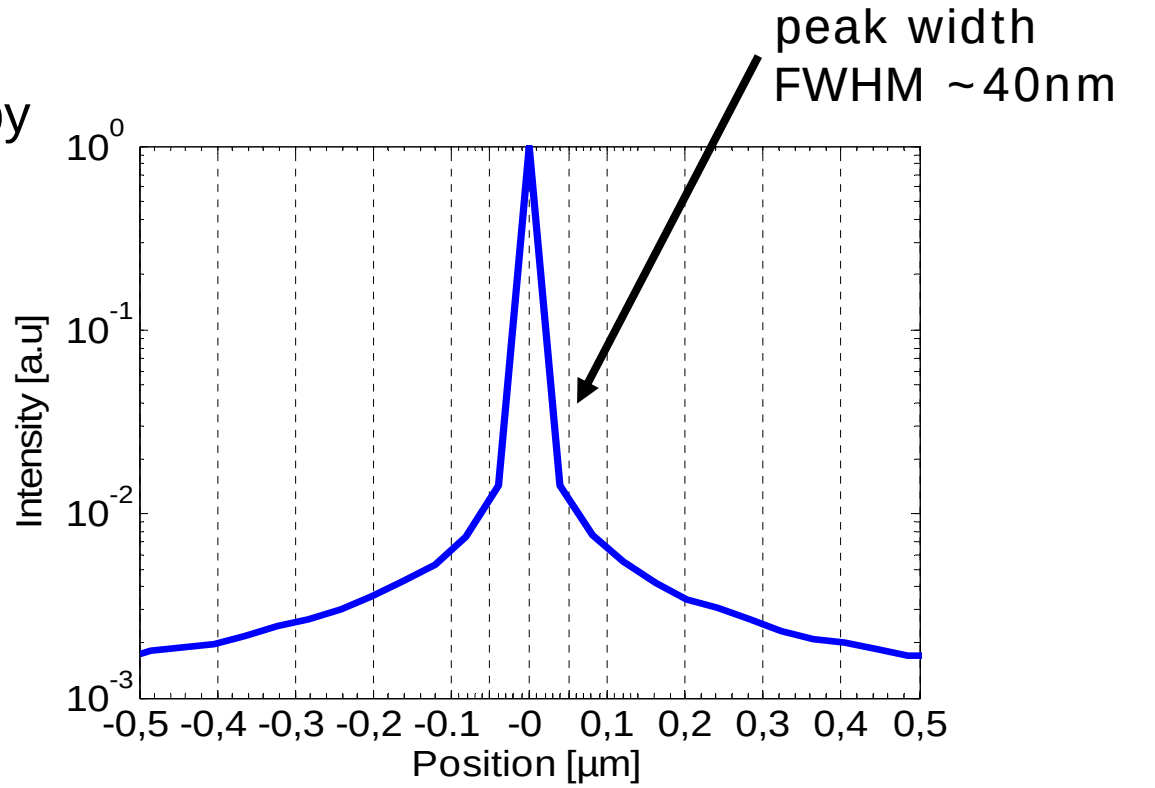

Absorbed Energy Vs Distance from X-ray hit (average of 750.000 photons)

1st order simulation of spatial resolution - drift/diffusion

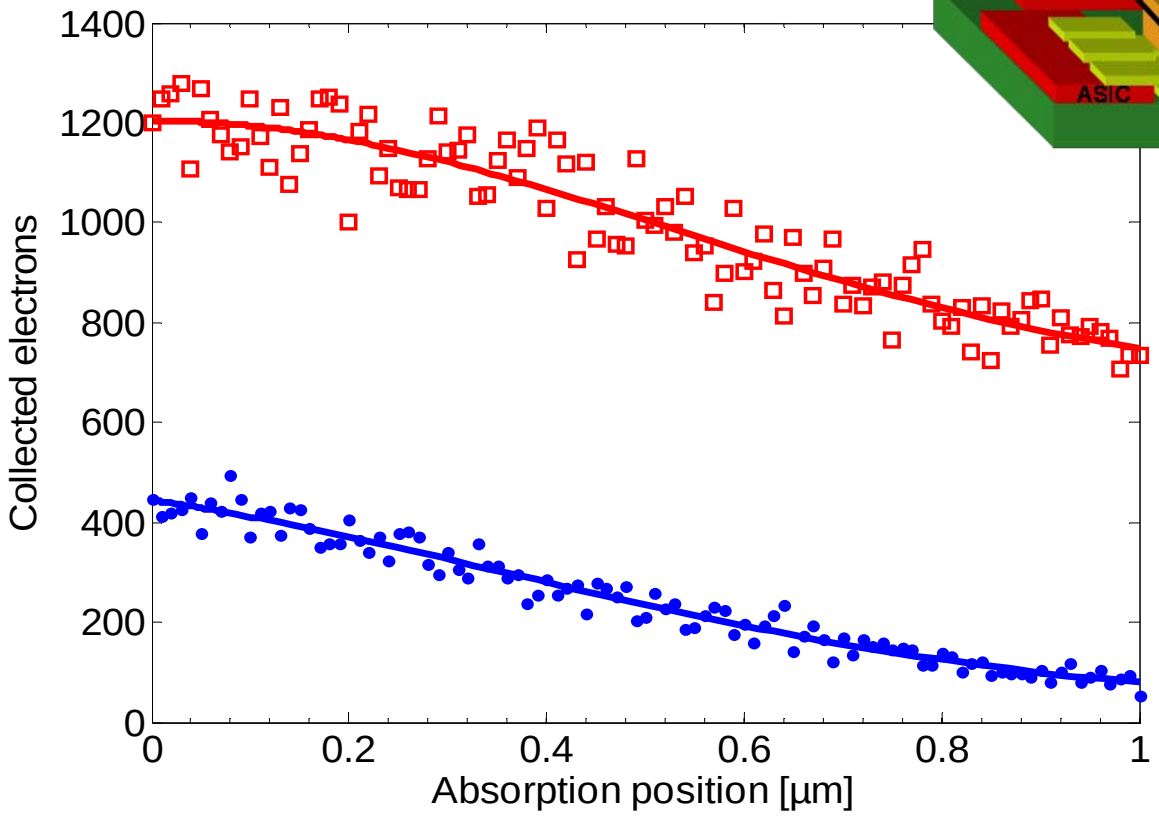

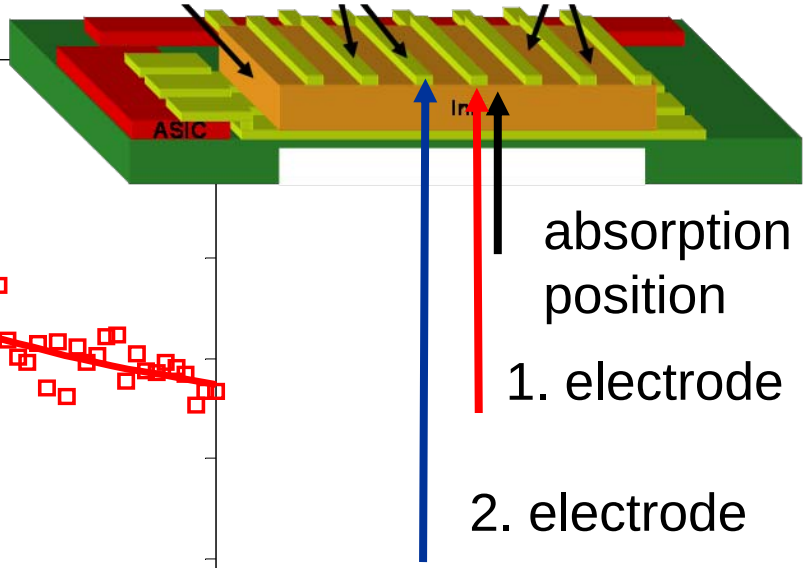

10keV X-ray ~2500 e/h pairs

1st order simulation of spatial resolution - findings

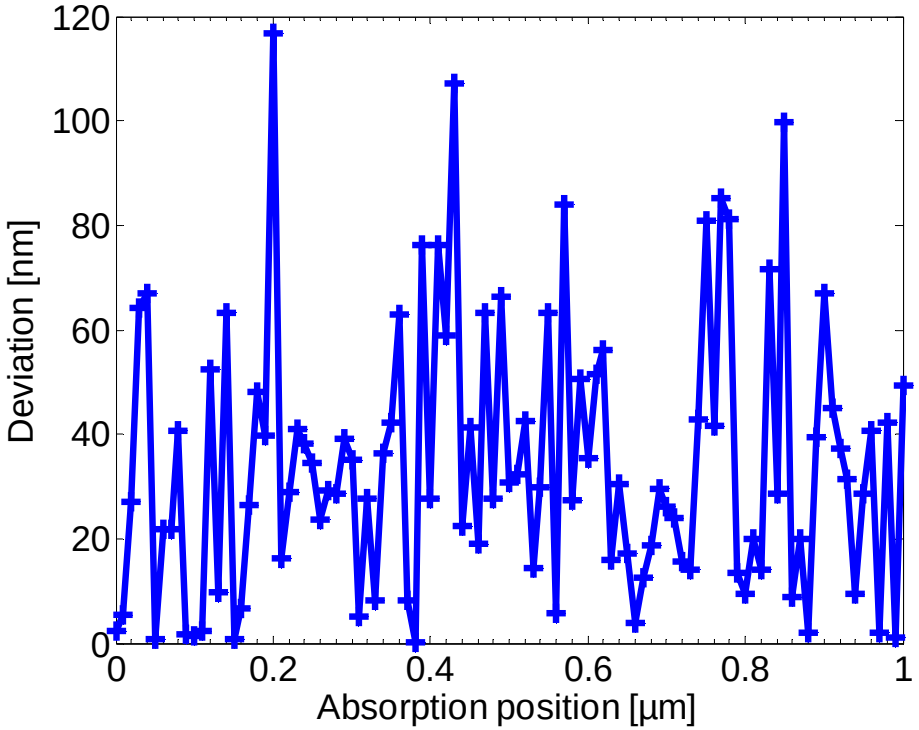

mean value

35nm+/- 25nm

Assumptions:

noiseless electronics

no recombinations

No design optimisation like AC coupled auxiliary electrodes

3D configuration for higher energies

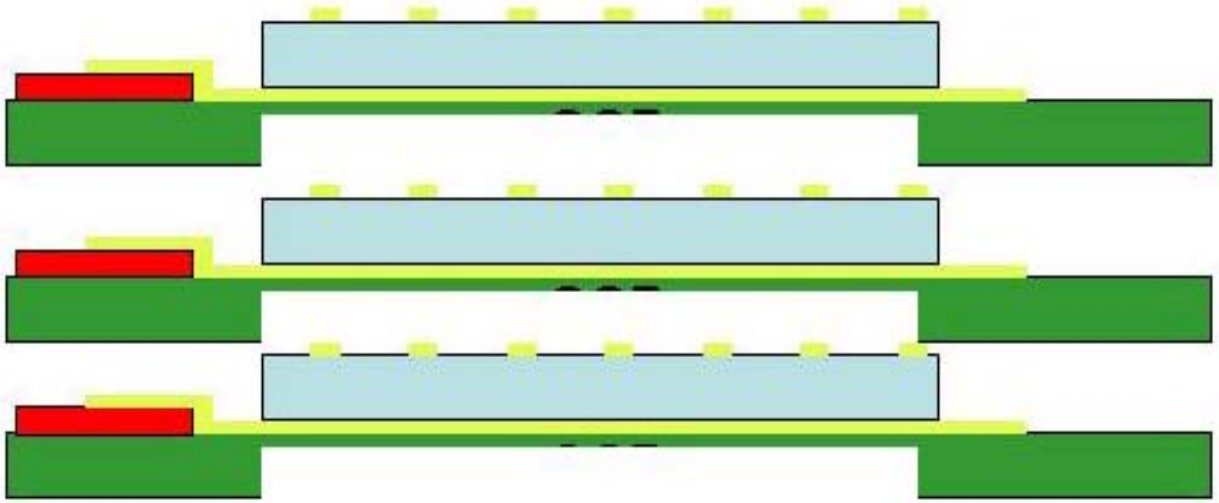

- mutiple layers increase efficiency
- capability of raytracing algorithms (no parallax problem!)
- options for superresolution
- posibilities for more accurate sample alignment

Throughput

Present ~10k photons/sec on serial 10Mhz read-out

Further development in read-out electronics divided in phase II and III

II. basic parallel electronics: ~5M photons/sec

III. advanced 2D registration using pulse shape or double readout.: increase by 2 orders of magnitude

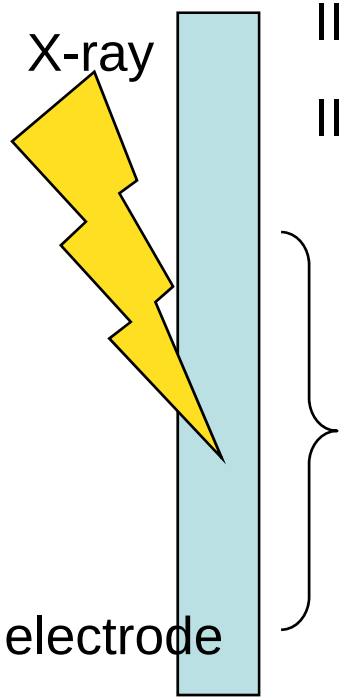

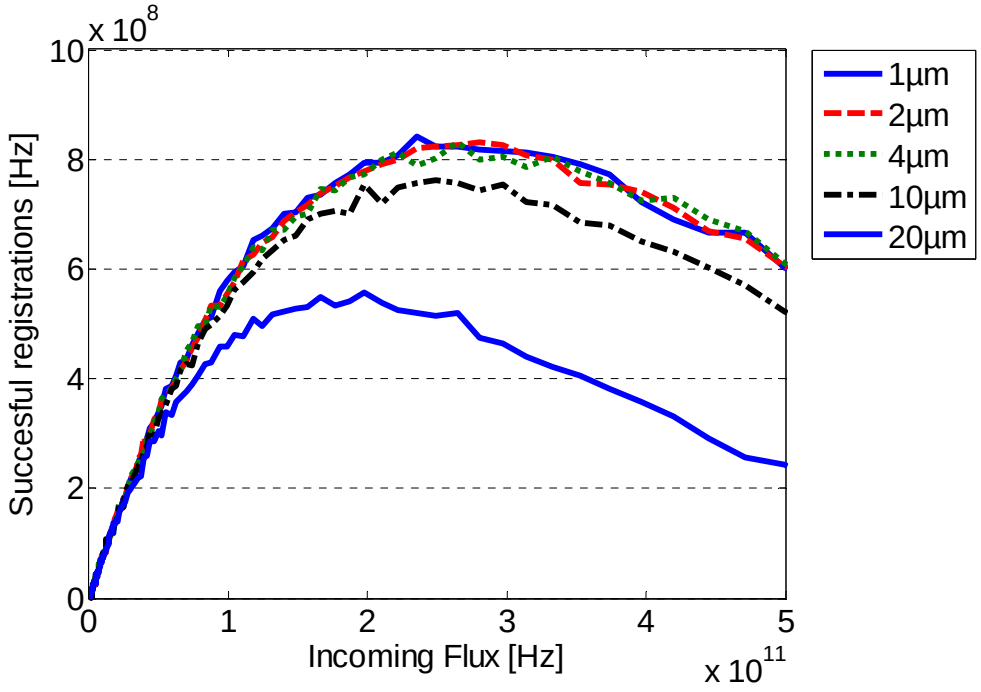

Timing

Phase I: proof-of-concept

proof of concept funding 1/1 08 – 31/6 09, 2 manyear
Aim: demonstrate 100 nm resolution.

Phase II: 5 MHz 2D detector

Deliverables:

- A prototype detector
- Test of resolution, imaging, stability, throughput
- A report on electronics for Phase III

Manpower: ~ 5 manyears * 3 years

Timing: start 2009

Phase III: Detector for XFEL

- Advanced electronics: delay-lines/pulse-shape analysis
- 3D detector

Conclusions

- lens-less single photon detector
- 100nm resolution
- infinite dynamic range
- 1keV-50keV photon energies