



In-situ Damage Characterisation of Natural Fibre Composites

Rask, Morten; Madsen, Bo; Sørensen, Bent F.; Lauridsen, Erik Mejdal

Publication date:
2011

[Link back to DTU Orbit](#)

Citation (APA):

Rask, M. (Author), Madsen, B. (Author), Sørensen, B. F. (Author), & Lauridsen, E. M. (Author). (2011). In-situ Damage Characterisation of Natural Fibre Composites. Sound/Visual production (digital)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.



Technical University of Denmark



Animation have been
replaced by still
pictures in this web
edition

In situ Damage Characterisation of Natural Fibre Composites

Morten Rask, Bent F. Sørensen, Bo Madsen, Erik M. Lauridsen

Presentation at CompTest 2011, Lausanne, EPFL

Contact: mrask@risoe.dtu.dk

Risø DTU

National Laboratory for Sustainable Energy

Motivation

- Can the plants we grow in fields be used for structural components?
- Can plant fibers be optimized to perform similar to fossil based fibers?
- A part of this optimization is to understand the damage mechanics



tinyurl.com/lp34pc




tinyurl.com/ox42gc



tinyurl.com/lukvqq


Outline

- Natural Fibre Composites
- X-ray tomography
- Results
- Conclusion

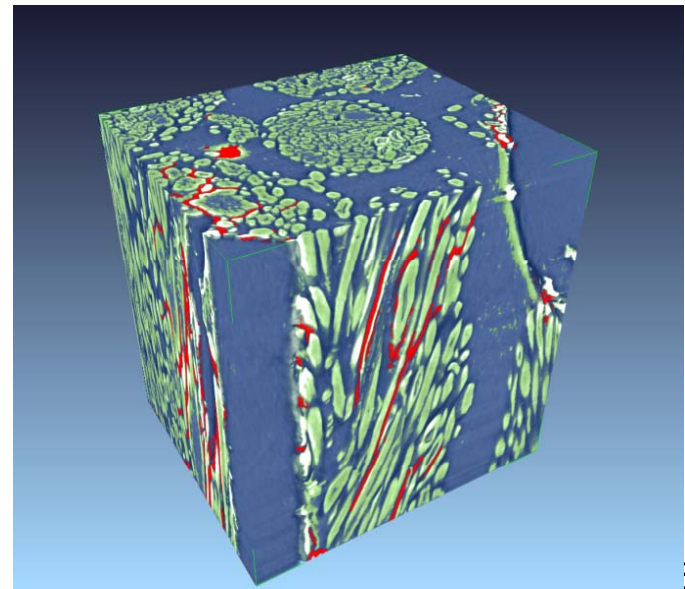

Outline

- Natural Fibre Composites
- X-ray tomography
- Results
- Conclusion

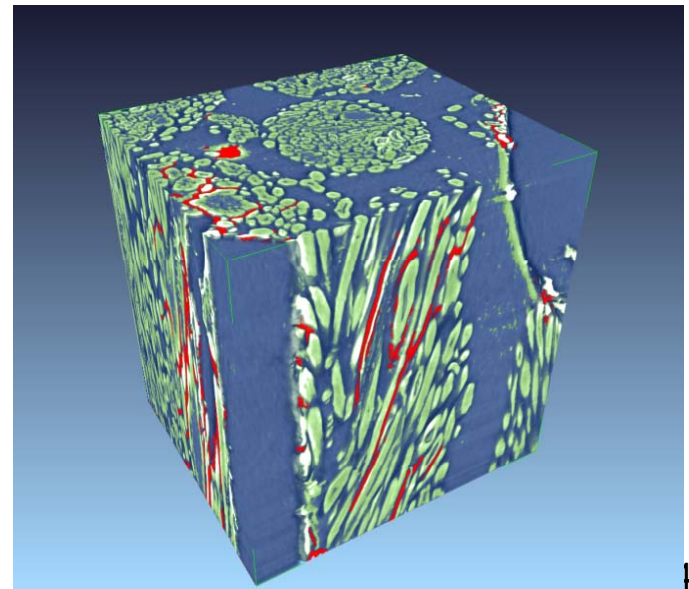


A piece of hemp yarn

- Yarn is spun from a large number of fibres
- Length of fibres
 - 50mm
- Diameter of yarn
 - 200-500 μ m
- Diameter of fiber
 - 5-15 μ m

Short fibres \rightarrow twisting
Fibres can form bundles




tinyurl.com/n675jn

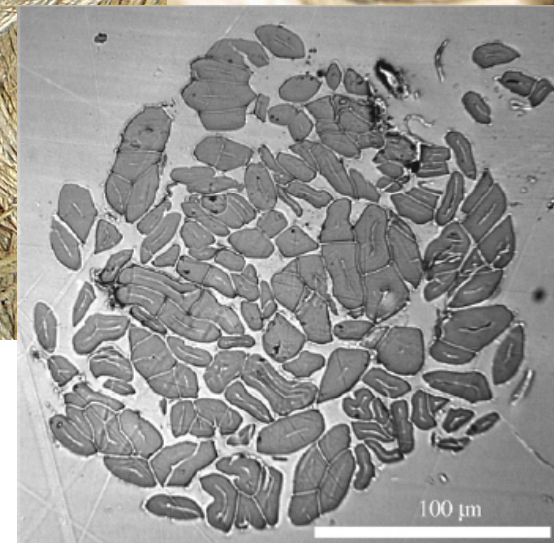

B Madsen et. al. Comp Part A. 2007.

Composite fabrication

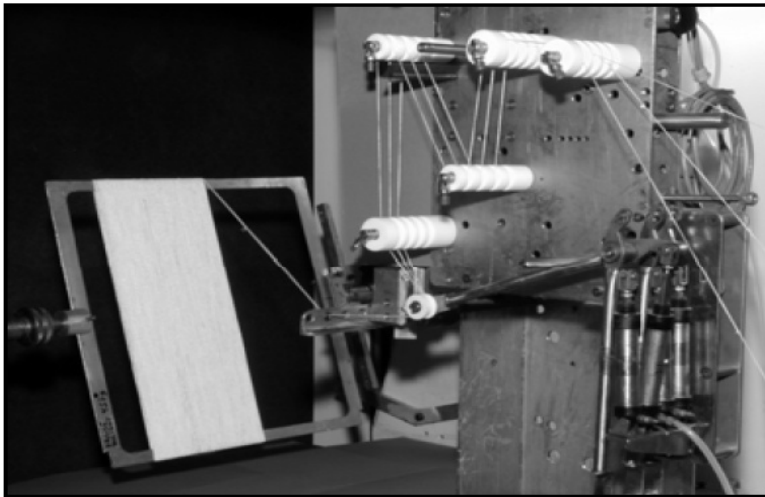

Picture courtesy of Bo Madsen

Commingled filament winding

- Hemp/flax fibers and polymermatrix systems
- Unidirectional laminates
- Uniform distribution of fibres and matrix
- Well-controlled fiber volume fraction




tinyurl.com/n4yxka

Press consolidation

- Small amount of porosities
- Short consolidation time

Porosities in natural fibre composites


- Complicated surface chemistry
- Irregular form and dimension along fibres
- Fibres are closely packed by twisting

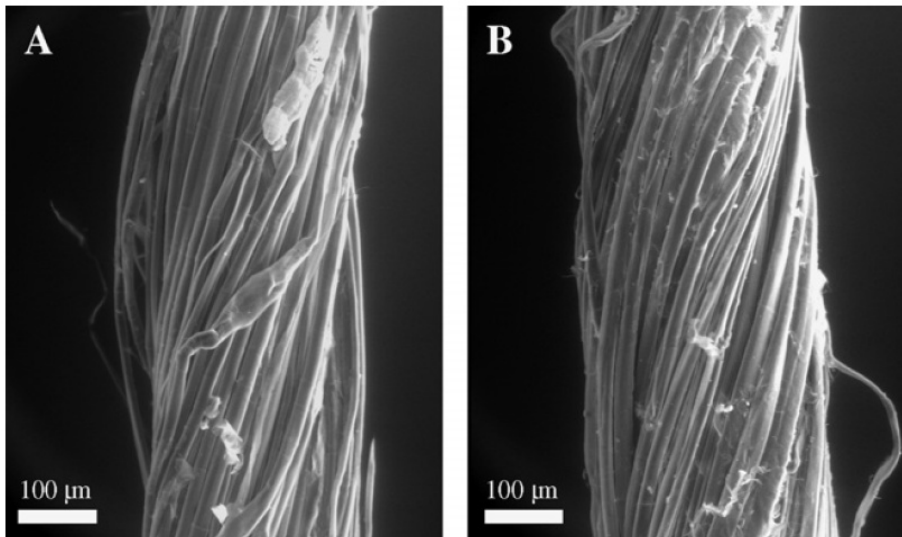


B Madsen et. al. Comp Part A. 2007.

Porosities is of special concern for natural fibre composites


3D volume of yarn – close up

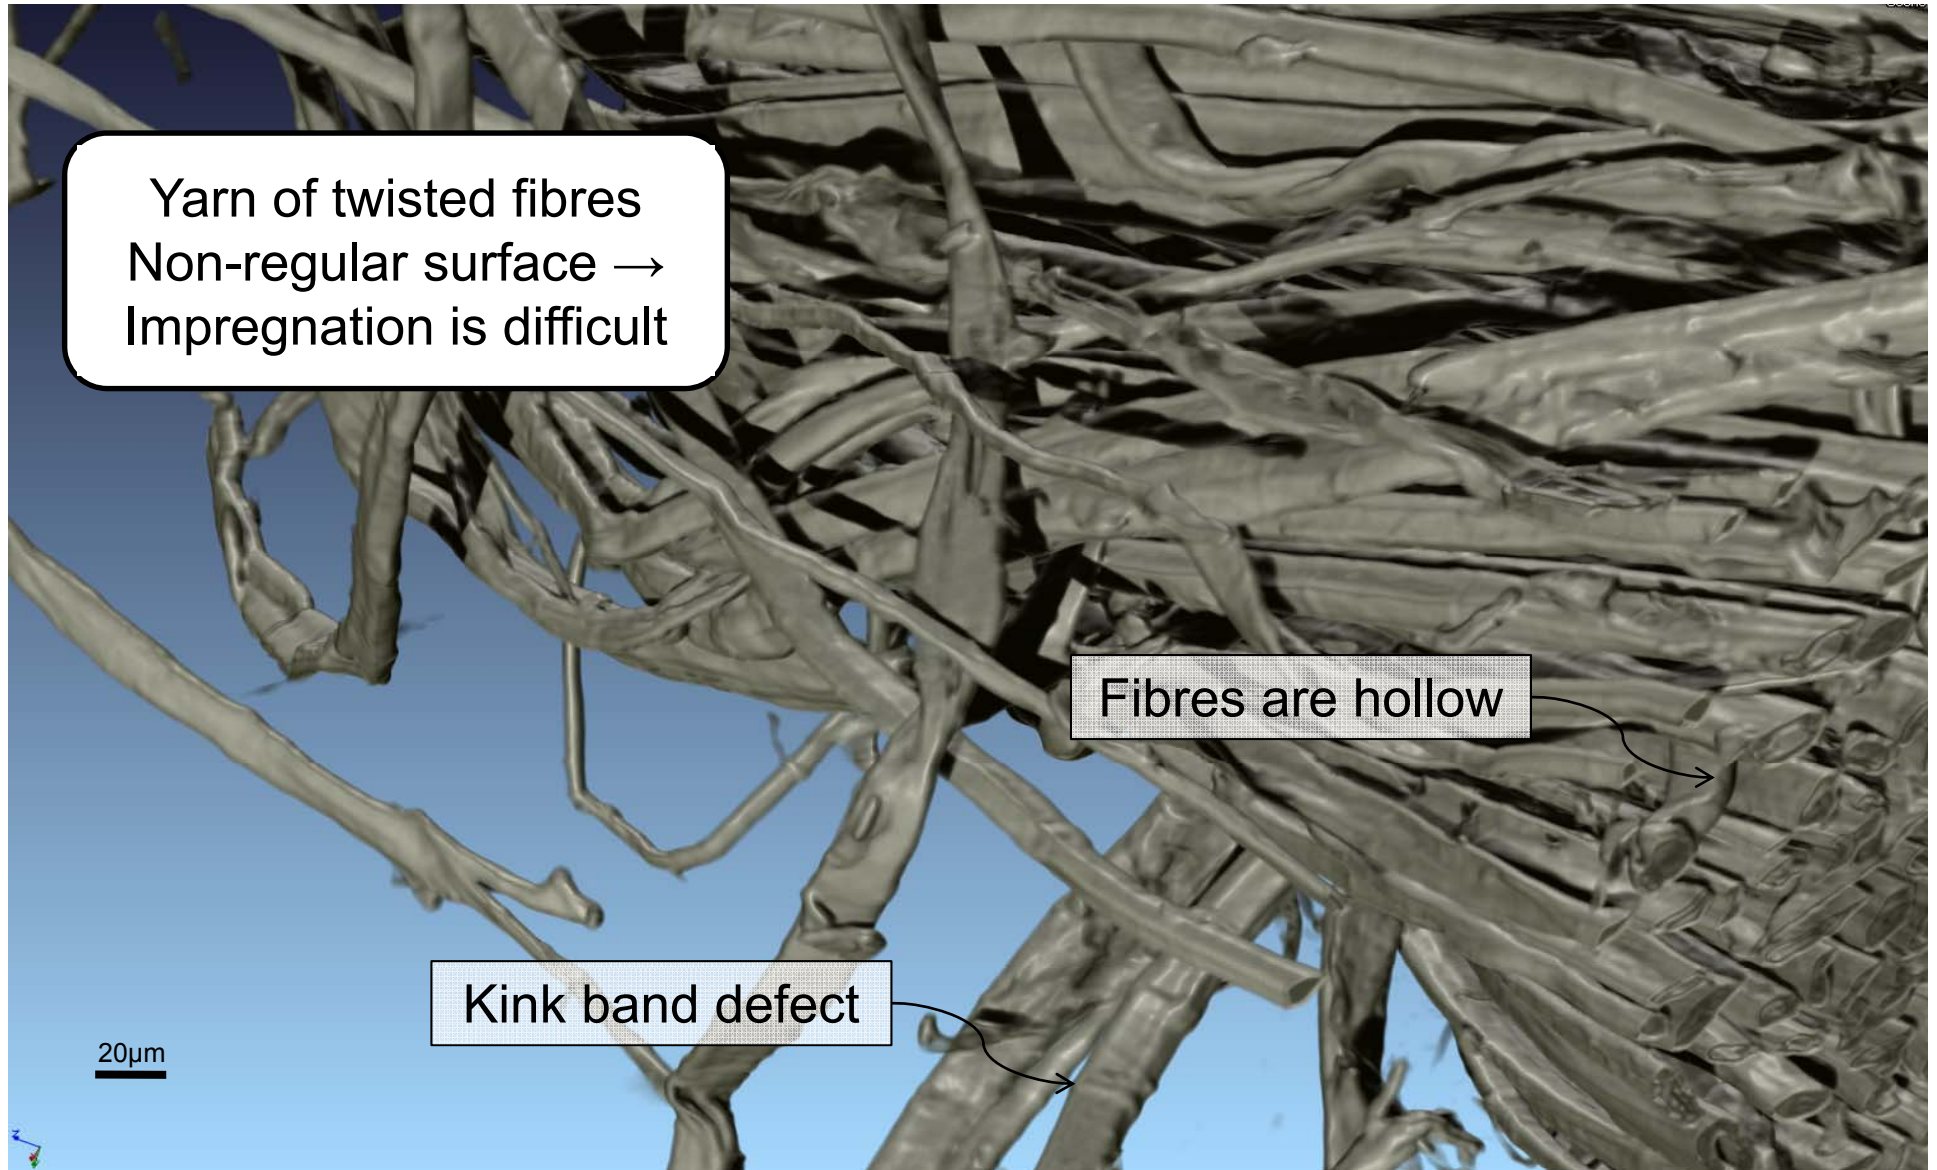

Do porosities influence damage?

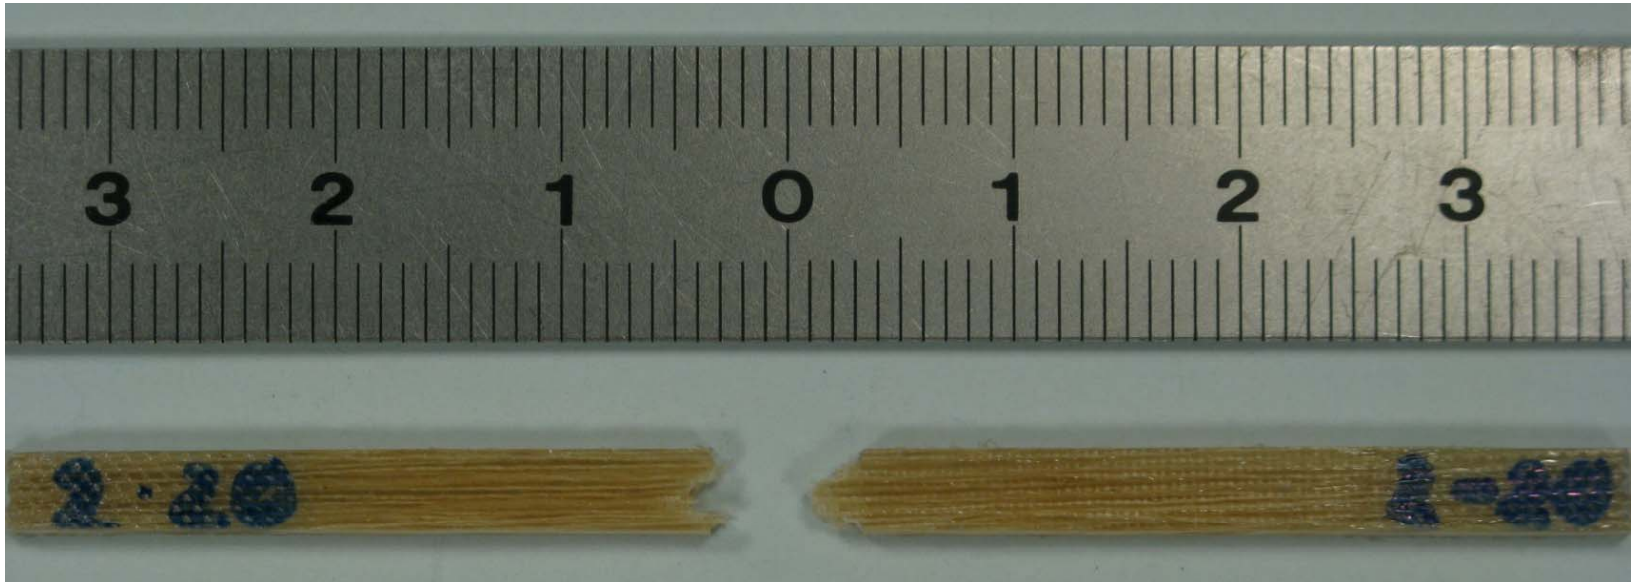

- Unidirectional composites can display splitting along fibres.
- How can this be energetically favourable?
 - Weak planes caused by porosities?

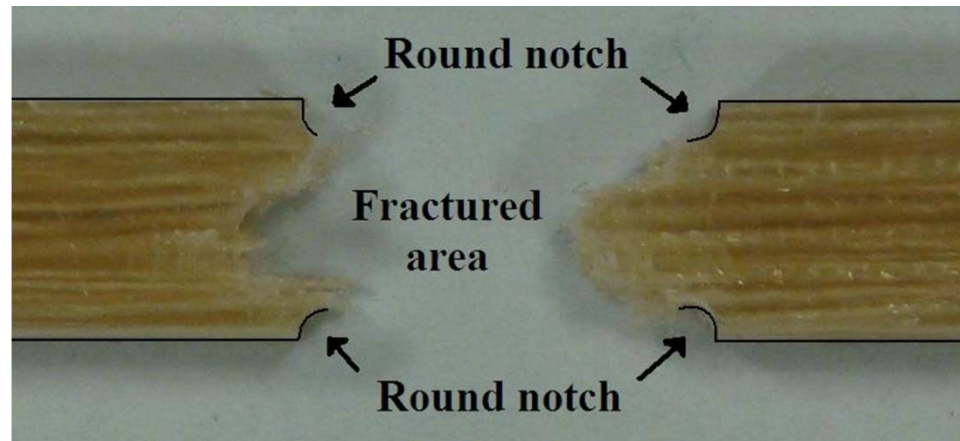

Damage characterisation

Traditional Methods:

- I. Microscopy post-failure inspection
- II. Acoustic emission
- III. Ultrasound scanning
- IV. Serial sectioning


Limitations:

- I. Limited to surface, destructive
- II. No information on type of damage
- III. Limited resolution, crack direction sensitive
- IV. Polishing artifacts, destructive

With these methods it is not possible to characterise damage completely
→ Tomography

Outline


- Natural Fibre Composites
- **X-ray tomography**
- Results
- Conclusion

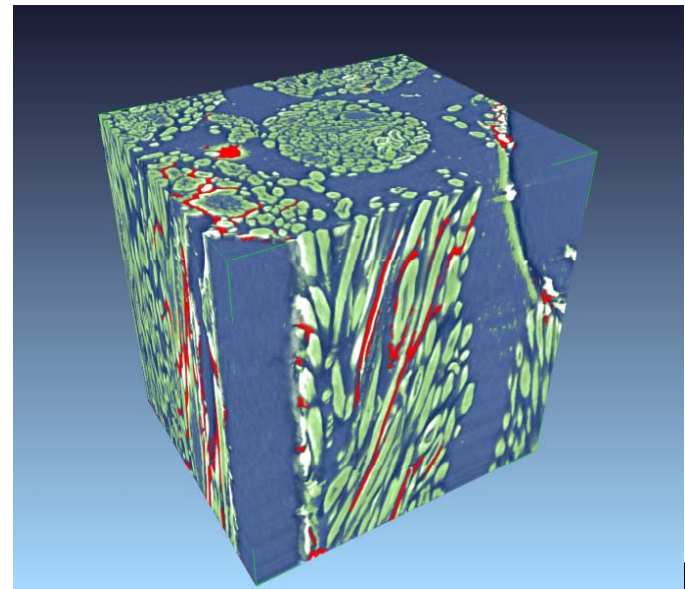

X-ray Tomography


- A synchrotron X-ray beam is used to scan the material of choice.
- A computer algorithm converts the large number of 2D projections to 2D slices.
- From these slices, the 3D structure can be reconstructed.
- Advantages:
 - 3D imaging
 - High resolution ($\sim 1\mu\text{m}$)
 - Non-destructive

Example: CT-scanning

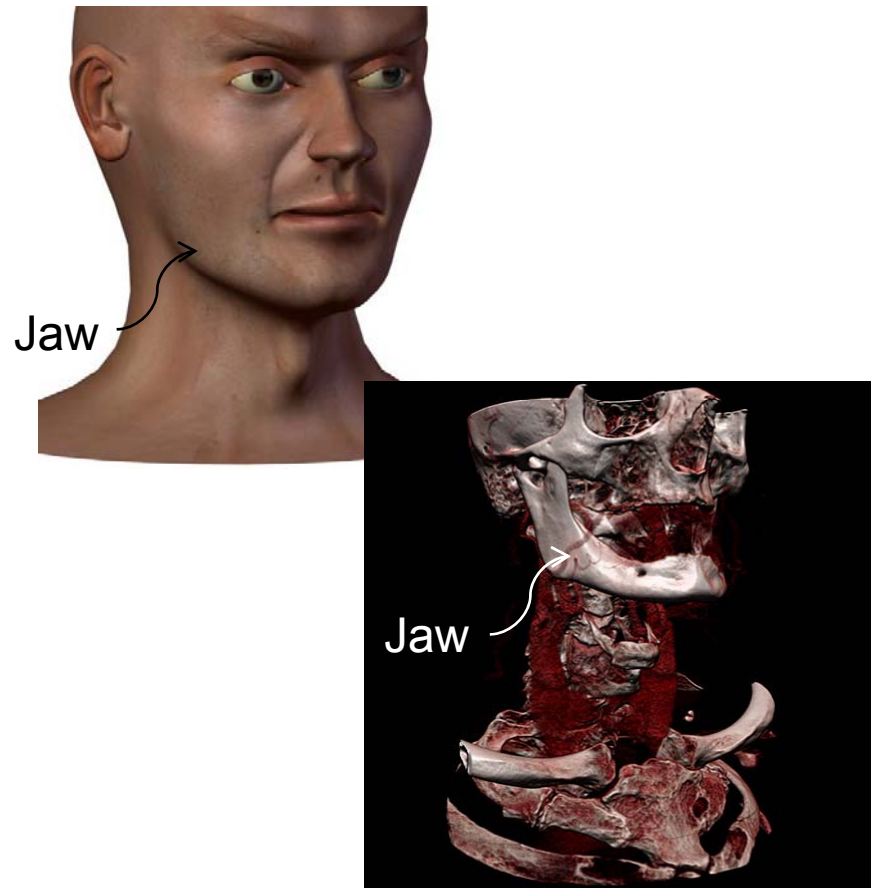


tinyurl.com/lekvys

SLS - Swiss Light Source

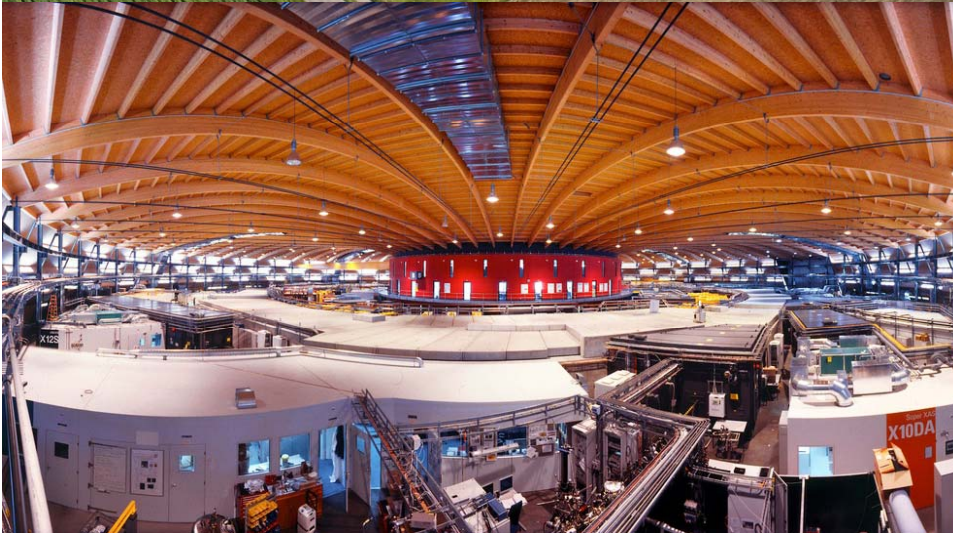


Test specimens and fixture

- Small notched composite specimens were scanned
- Different yarn samples were scanned
- Scanning was done at different load levels in special loading fixture

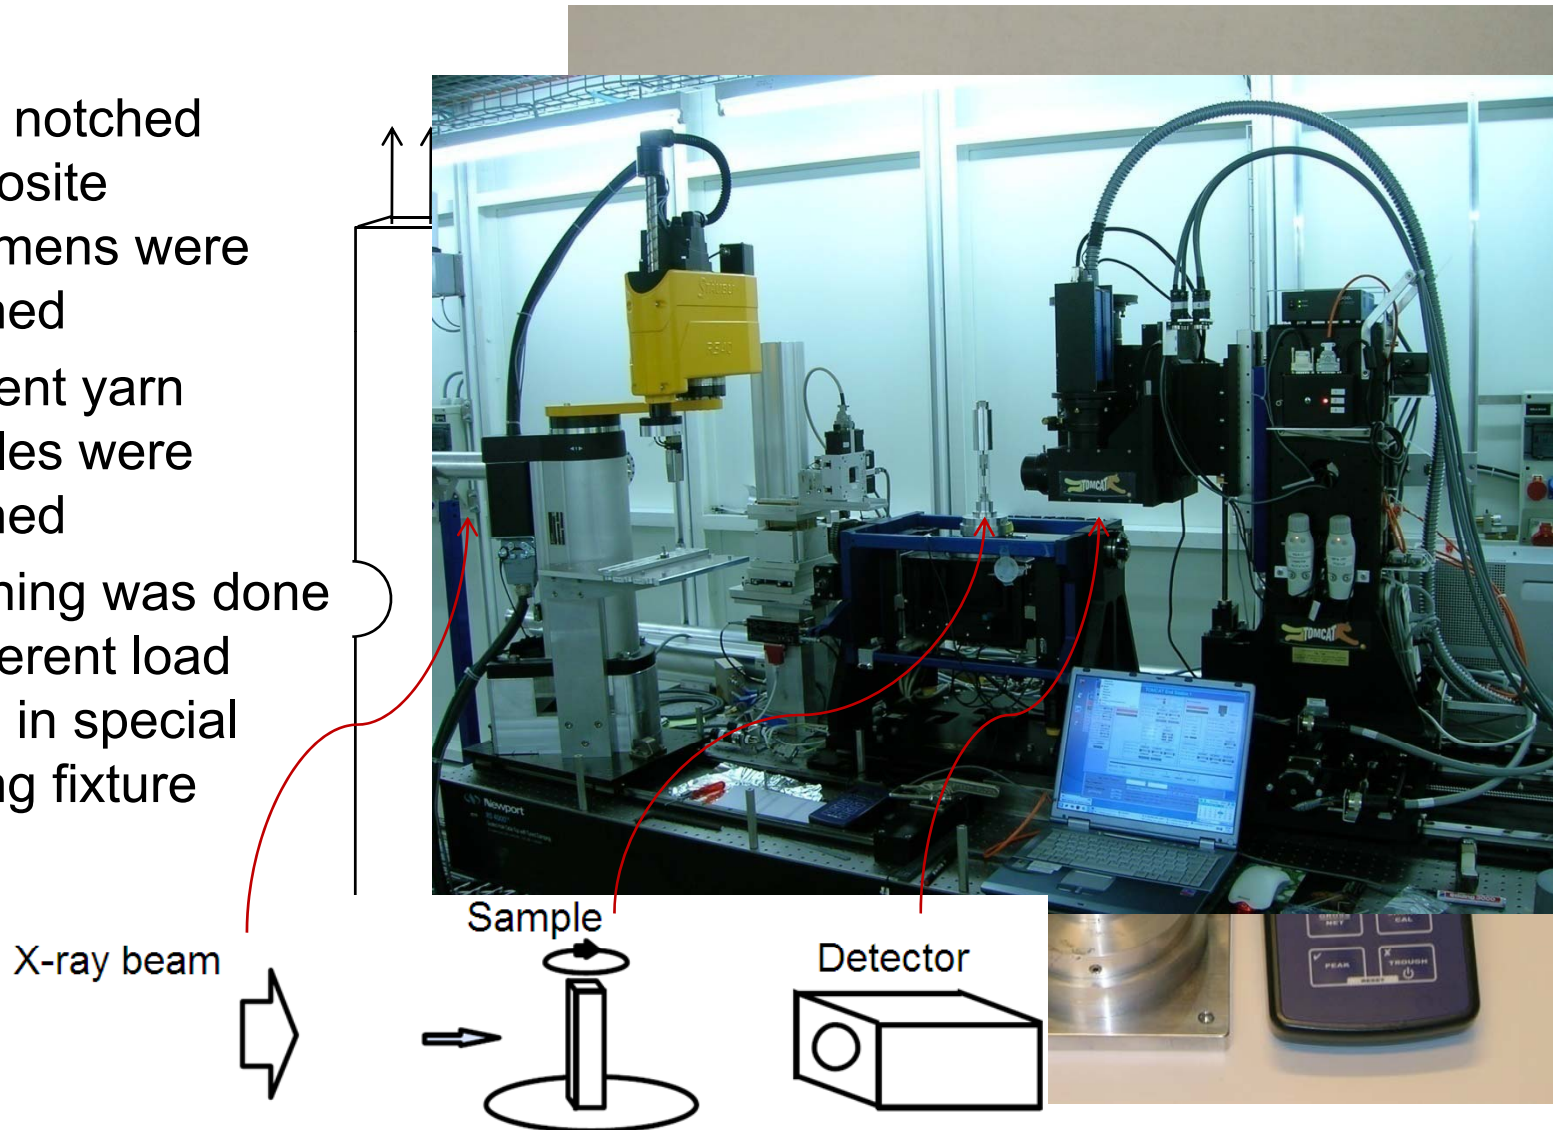



Outline

- Natural Fibre Composites
- X-ray tomography
- **Results**
- Conclusion


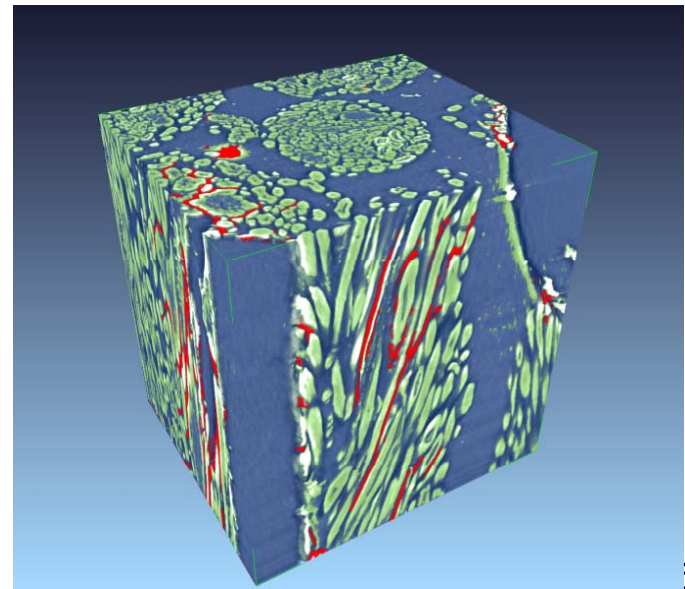


3D animation



- Fibres are light grey
- Matrix is transparent
- Cracks are red
- Animation shows red box below
- Dimensions of box is $1.4 \times 1.4 \times 1.4 \text{ mm}^3$

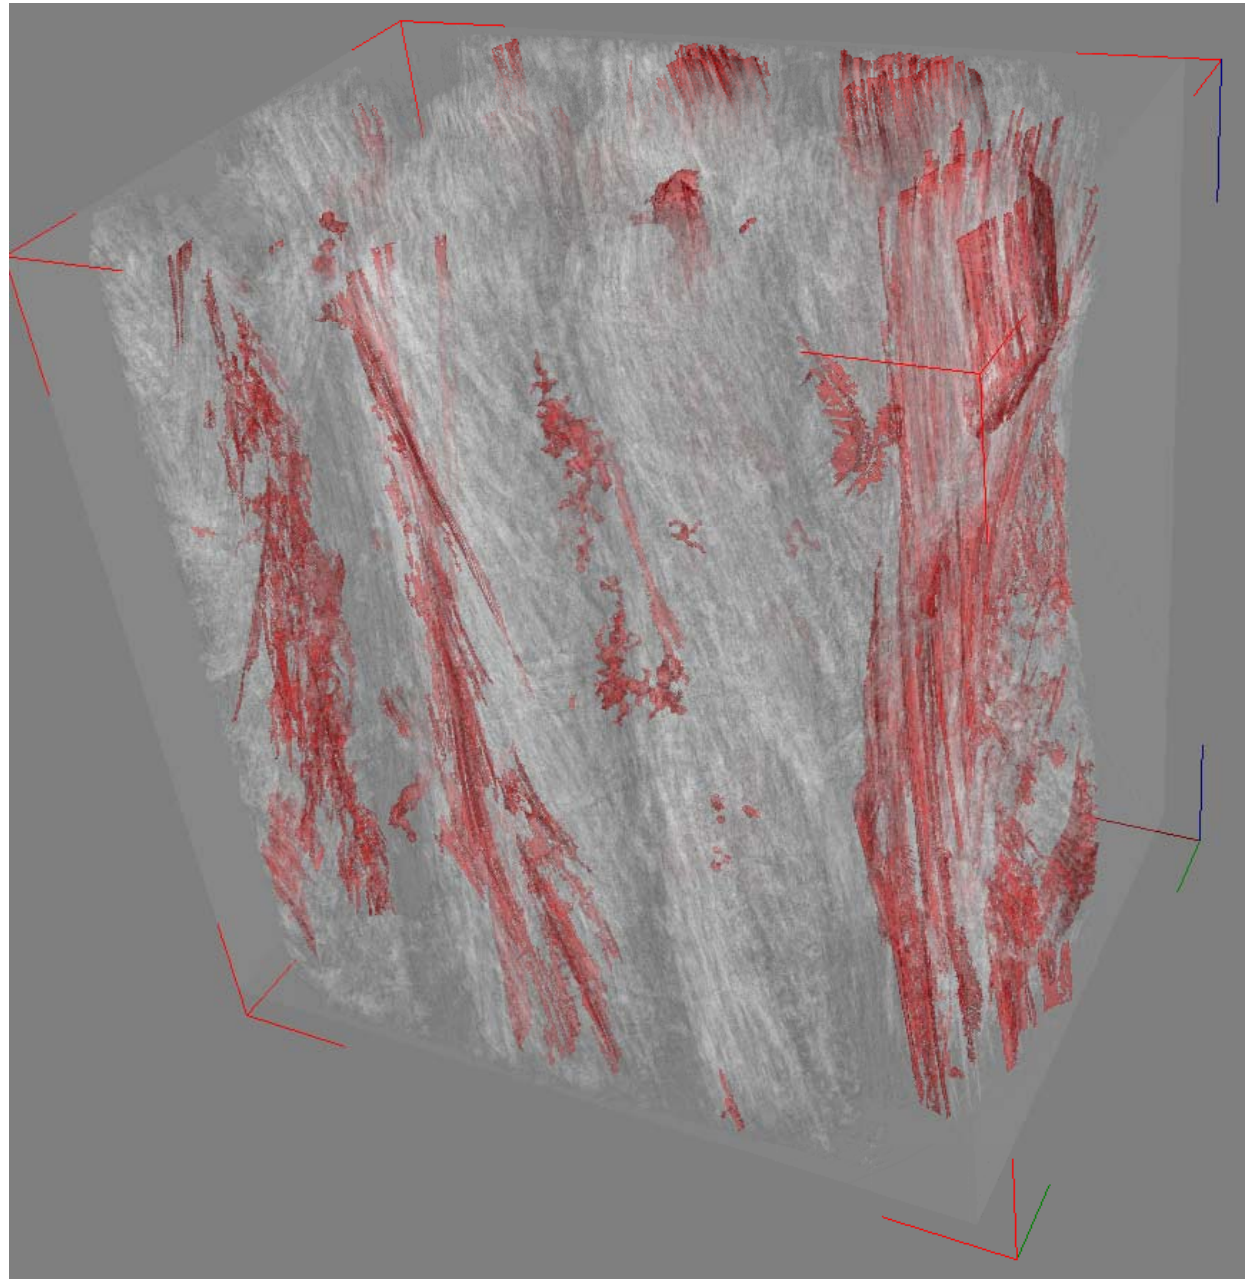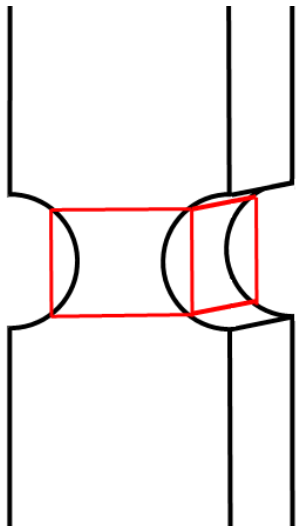



- Evolution of interface cracks
- Cracks are often seen at fibre bundles

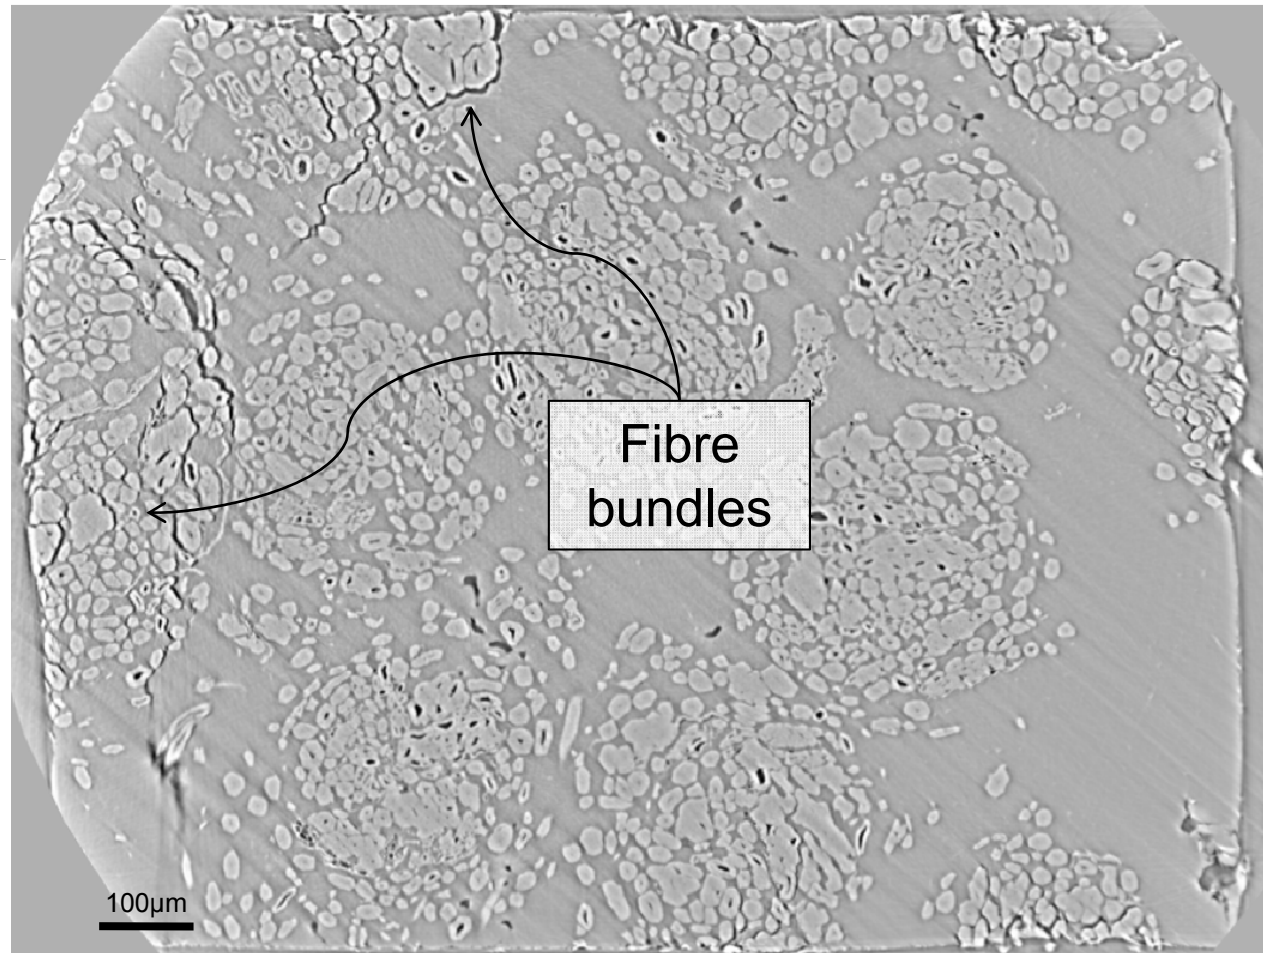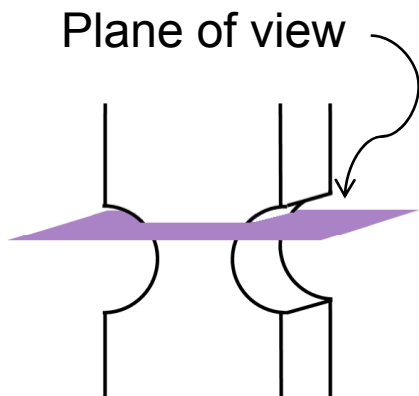



- Two fibre breaks
- Shear cracks
- Cracks follow fibre/matrix interfaces

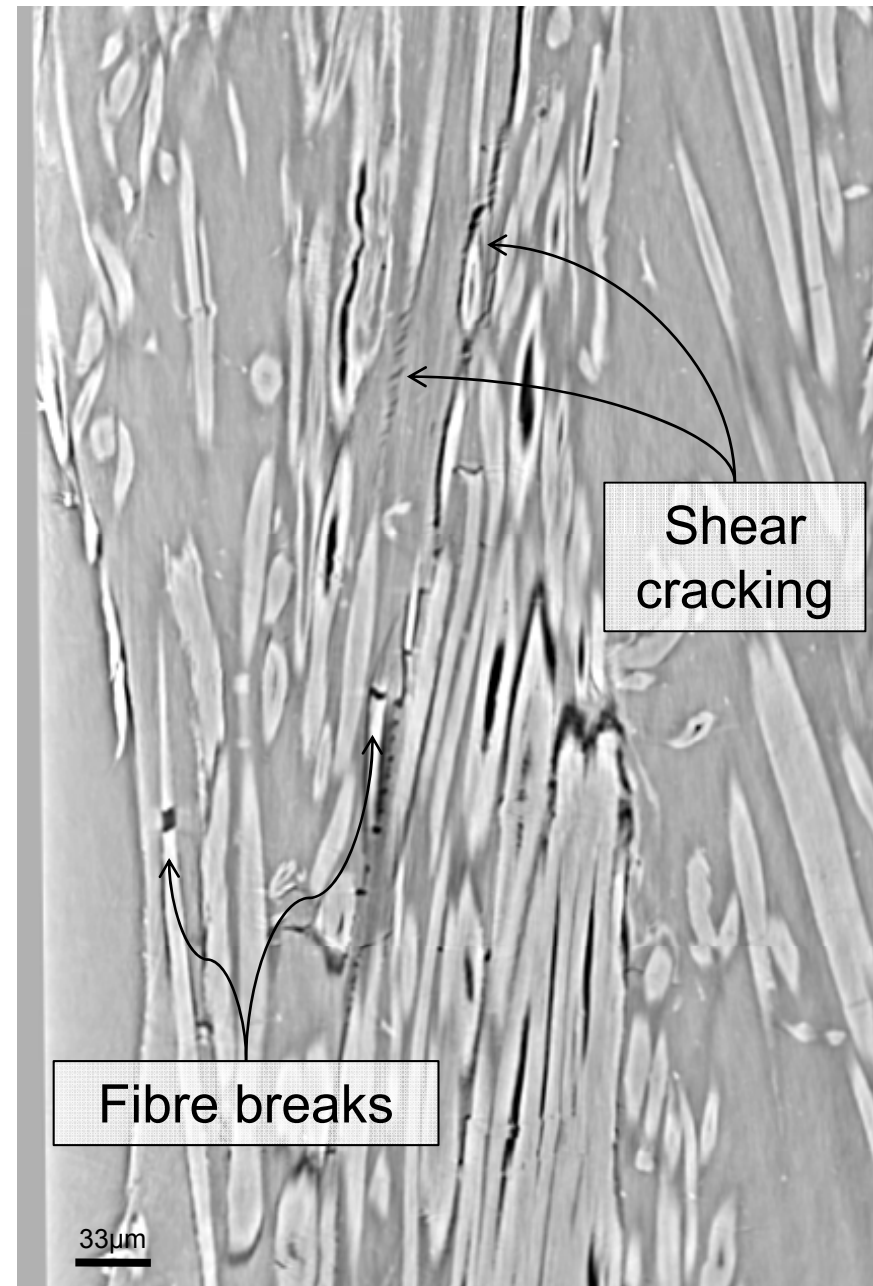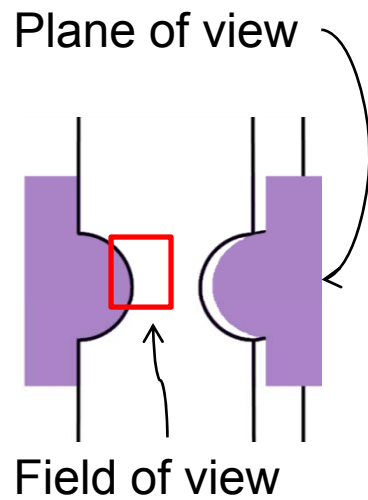



- Evolution of shear cracks

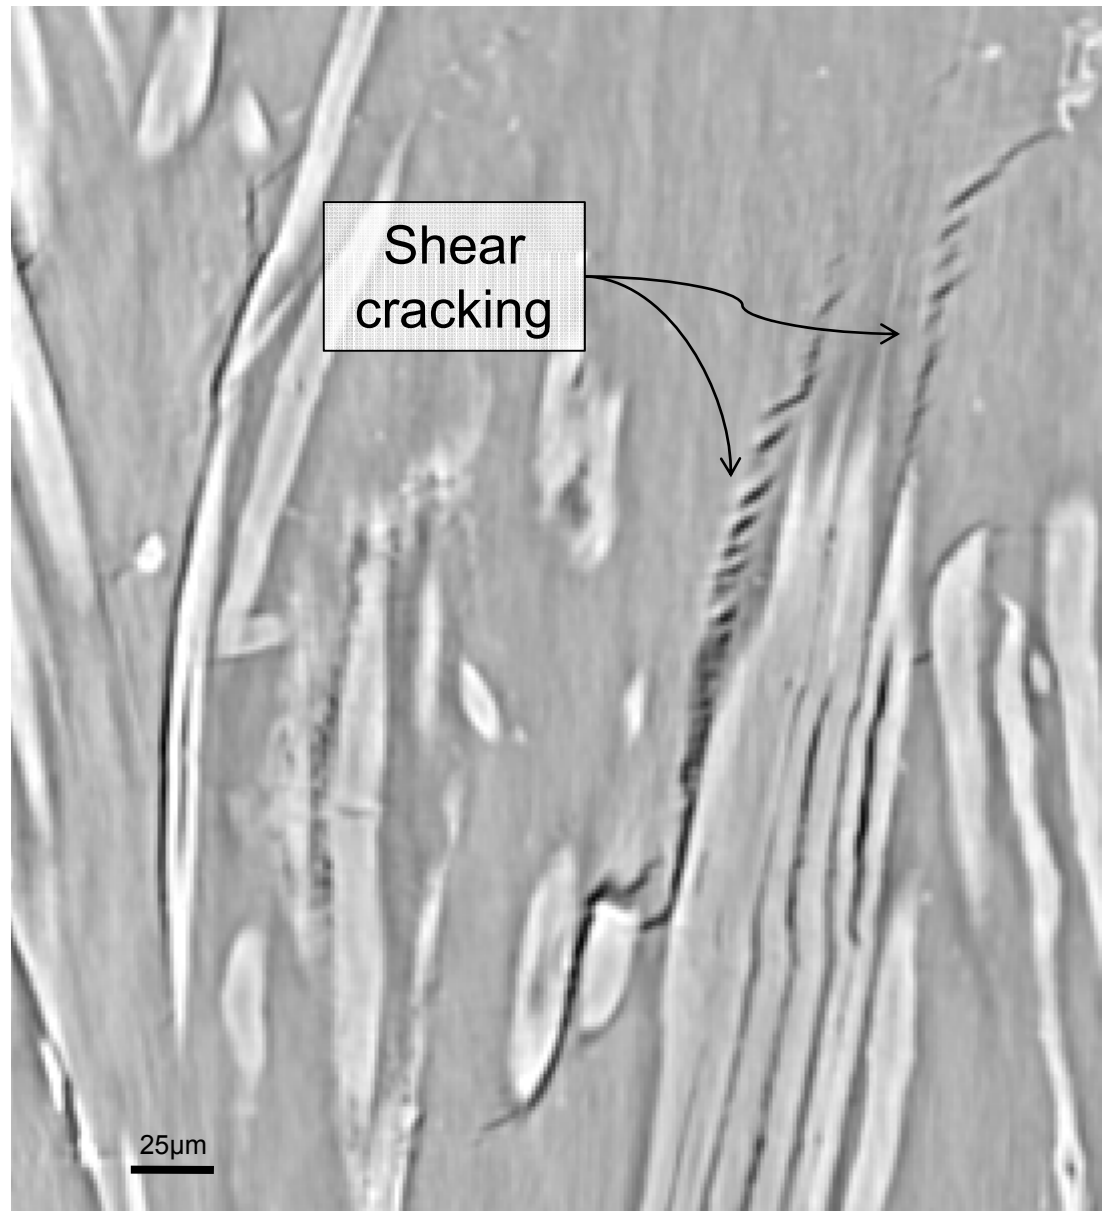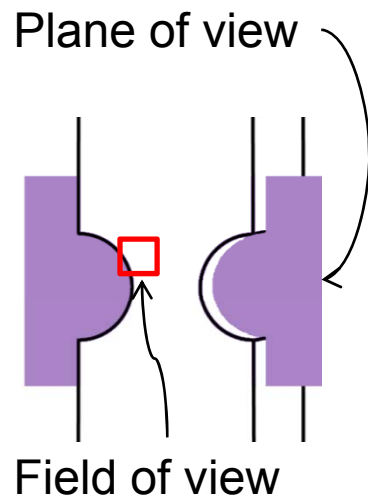



- Shear cracks
- Path is dictated by fibre/matrix interfaces

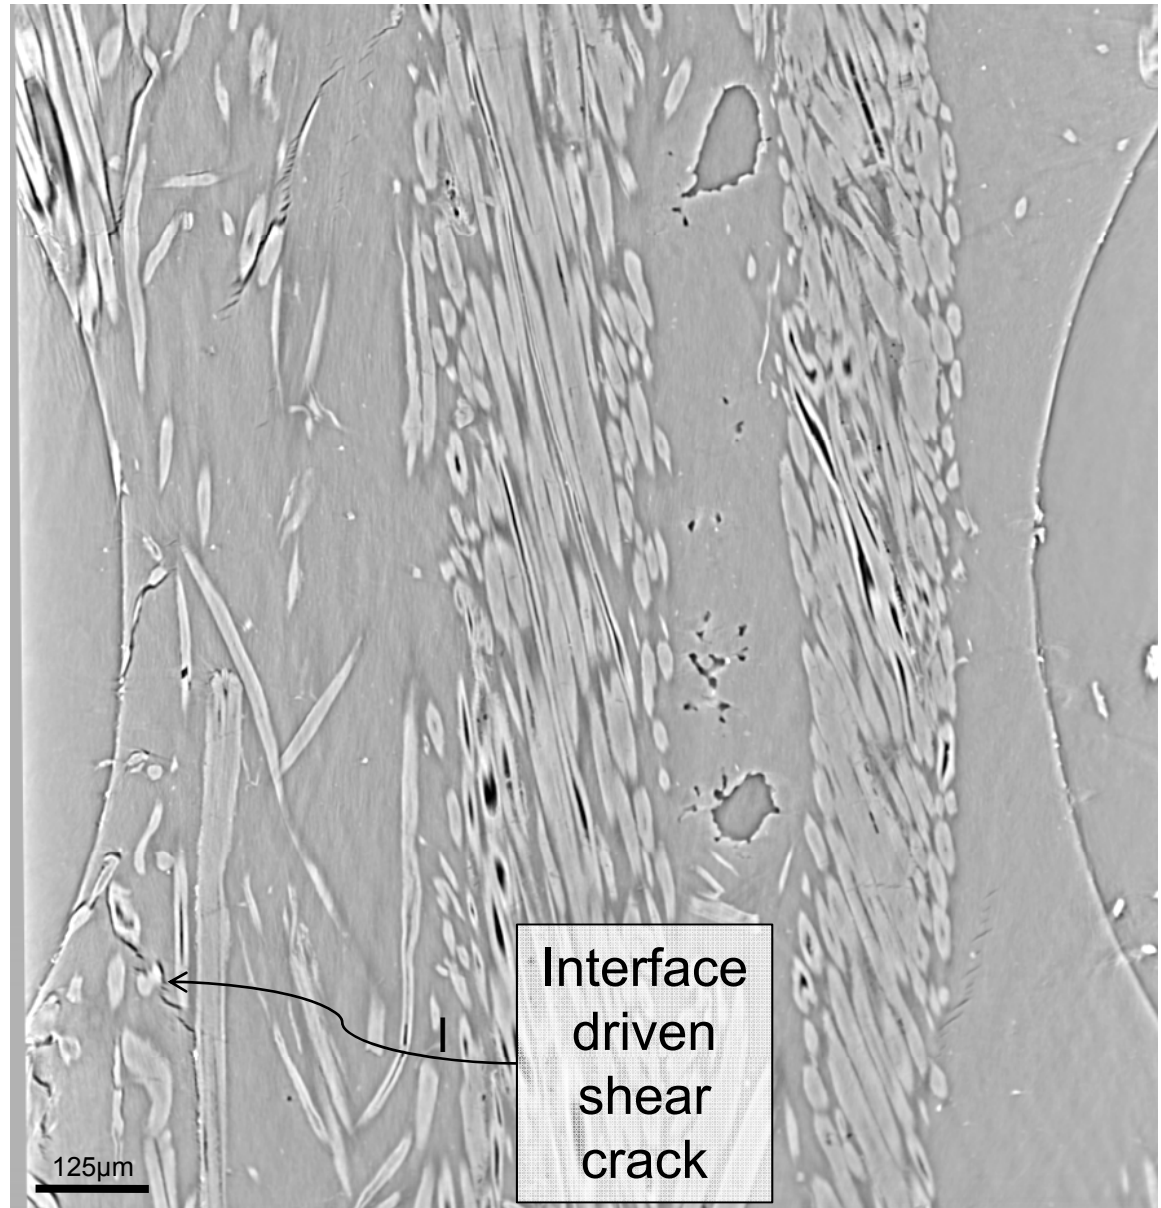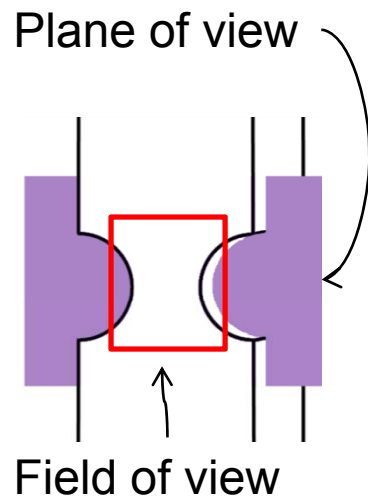



- Long splitting crack emanating from notch stress concentration
- Path follows fibre/matrix interfaces
- Eight fibre breaks are visible, some weak bands are seen.

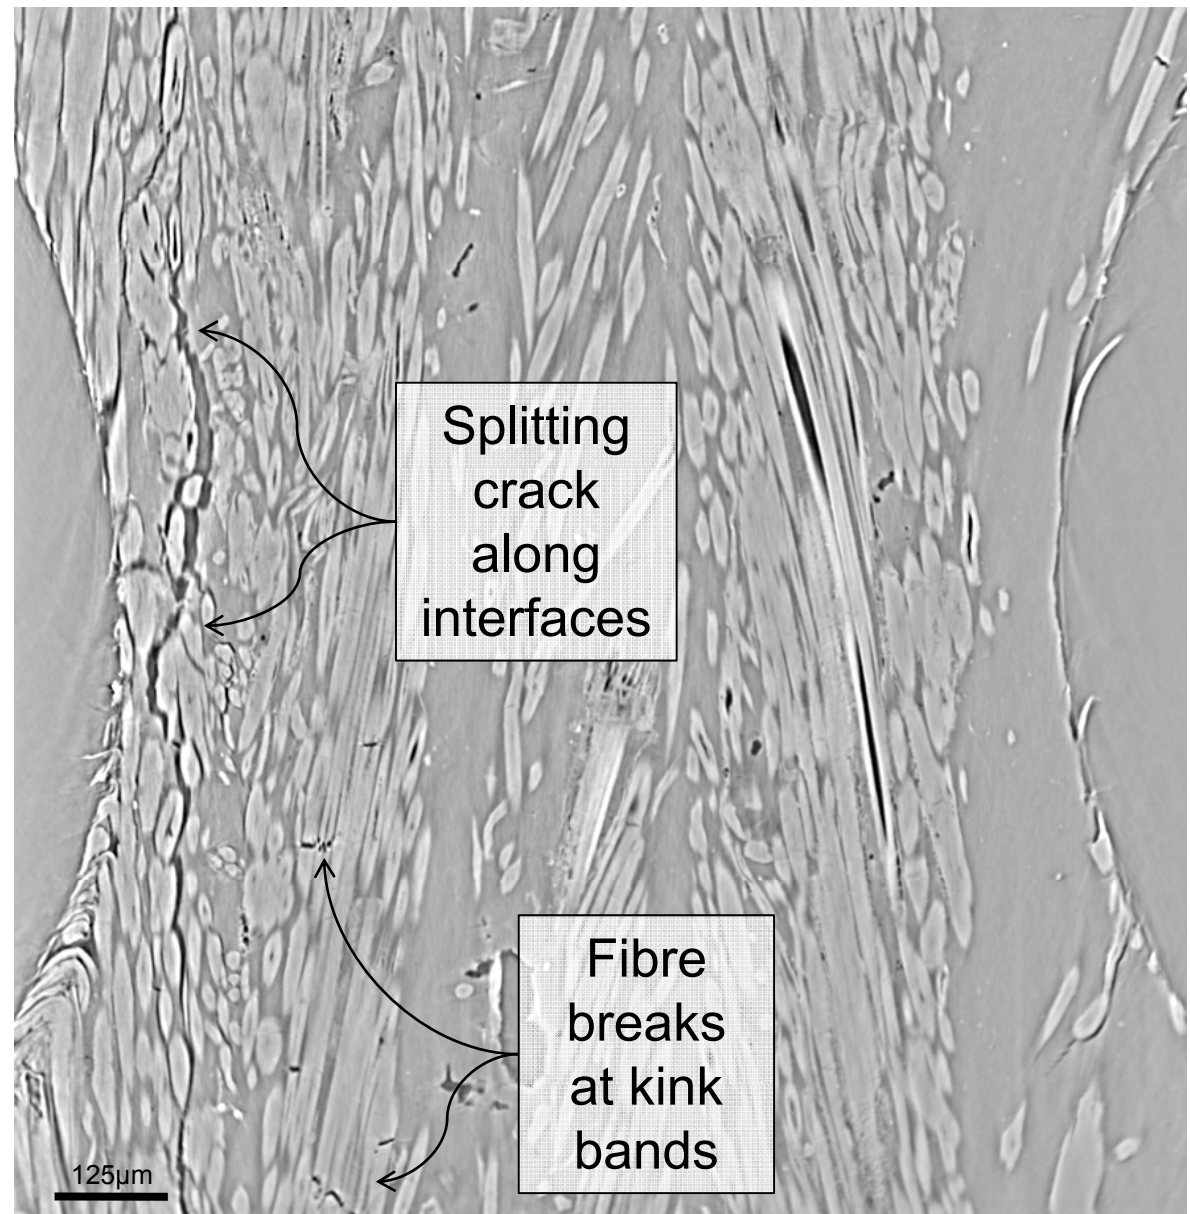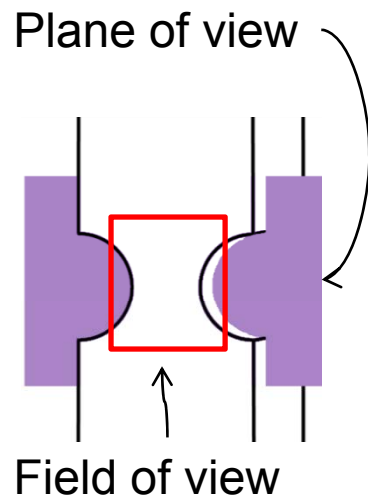



- Large break-away
- Path dictated by fibre/matrix interfaces

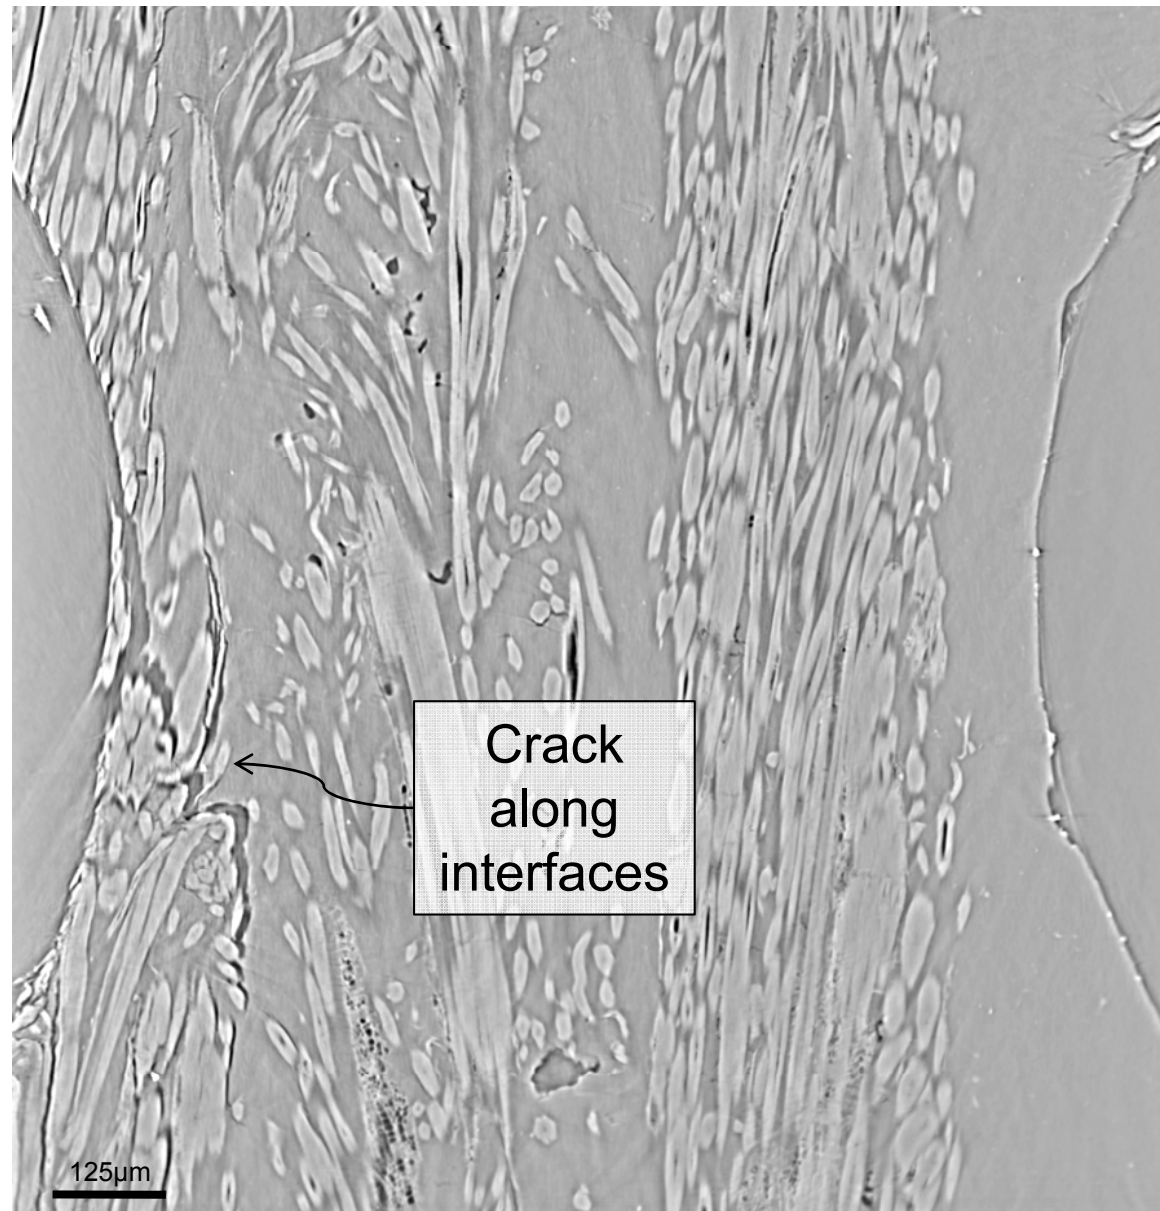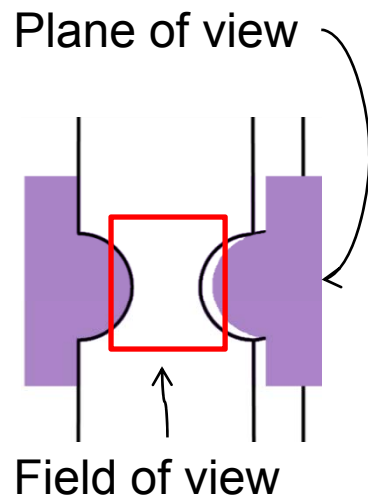


- Fibre breaks at weak bands in fibres
- Breaks at three neighbouring fibres. No weak band seen in middle fibre – failure by stress transfer?

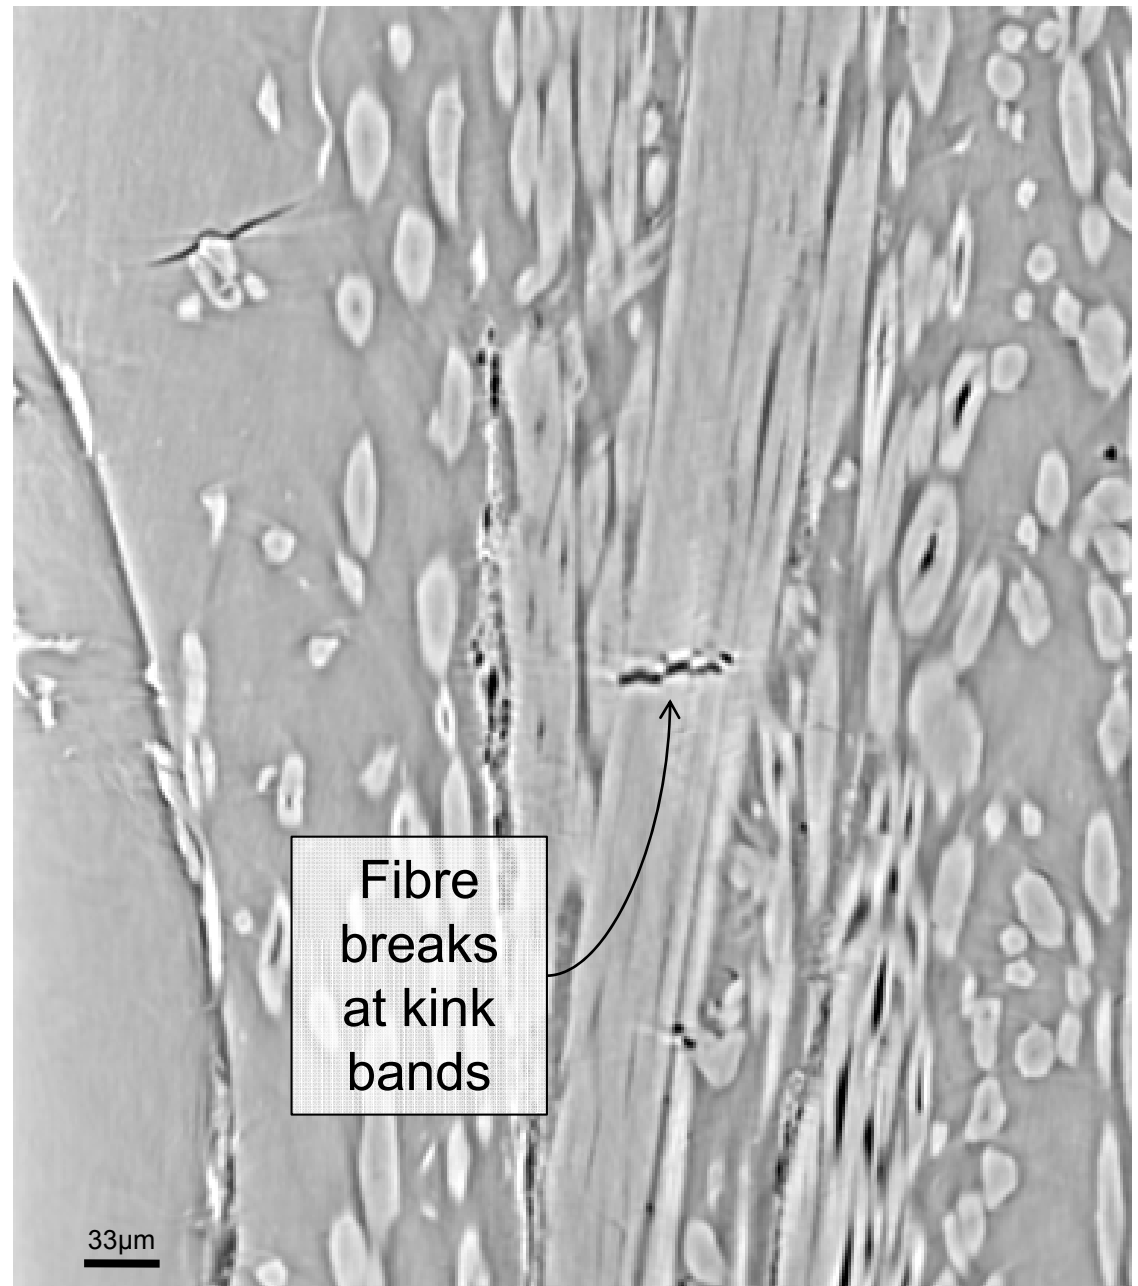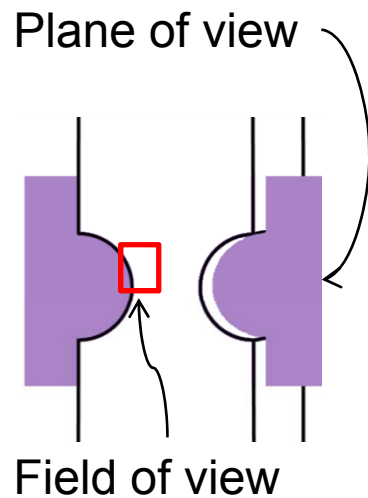


- Shear cracks symmetric in position and direction?

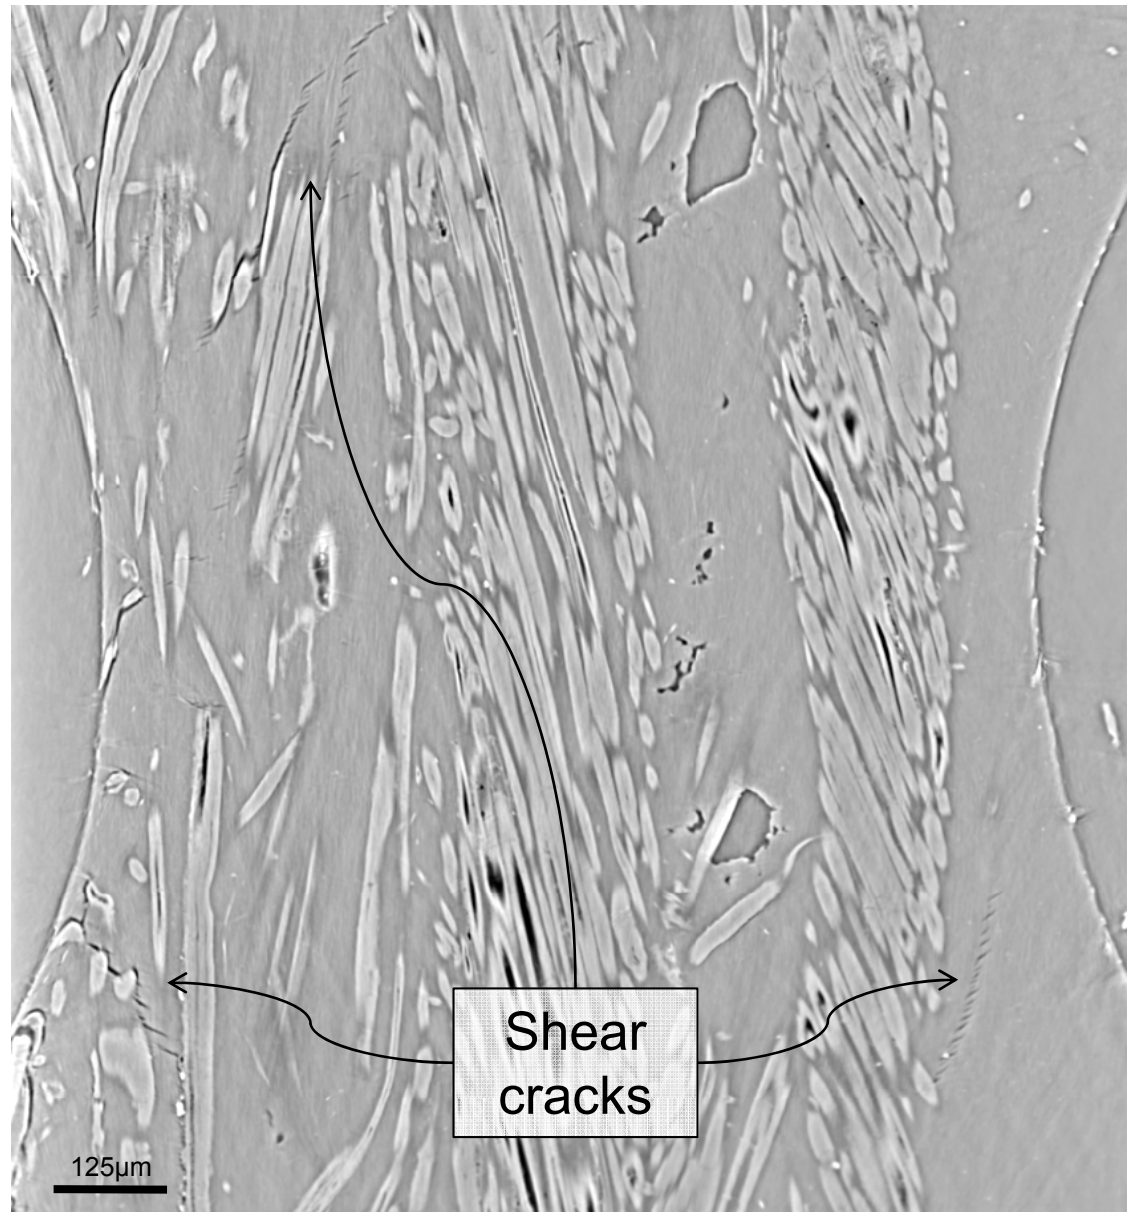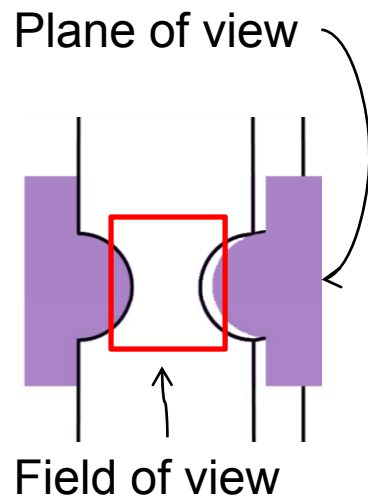

X-ray data

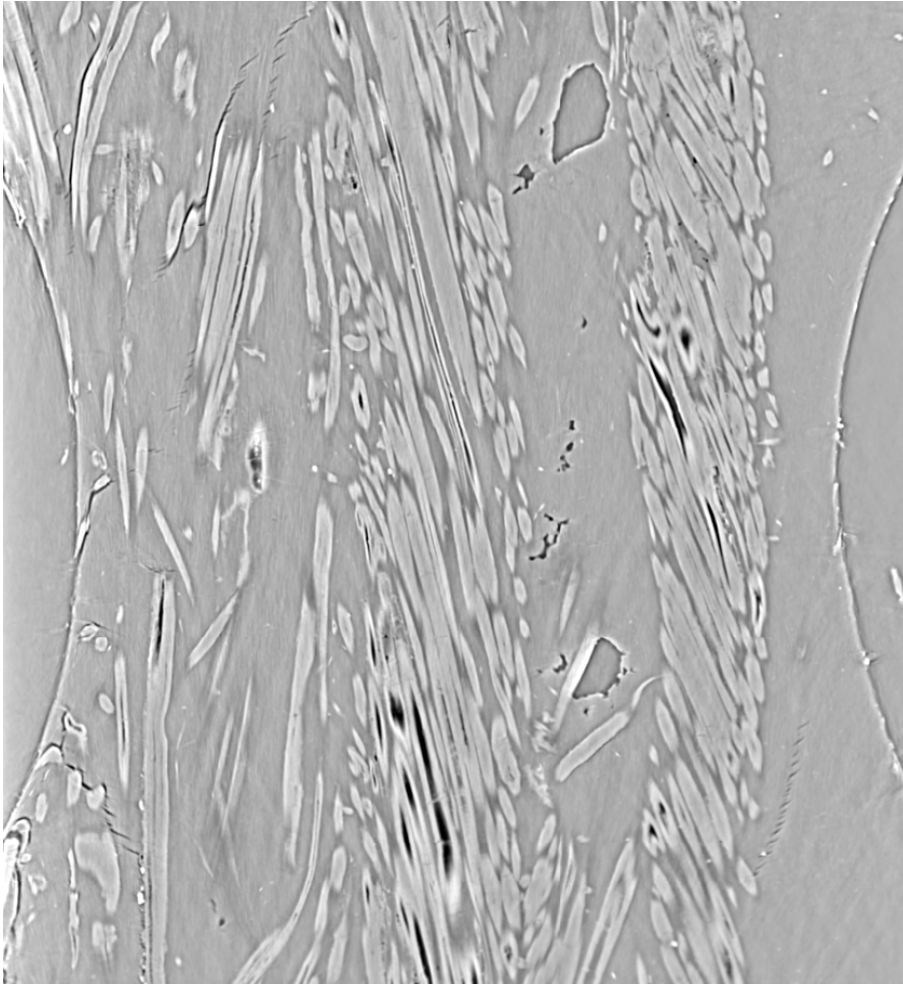


FEM simulation of σ_{12}

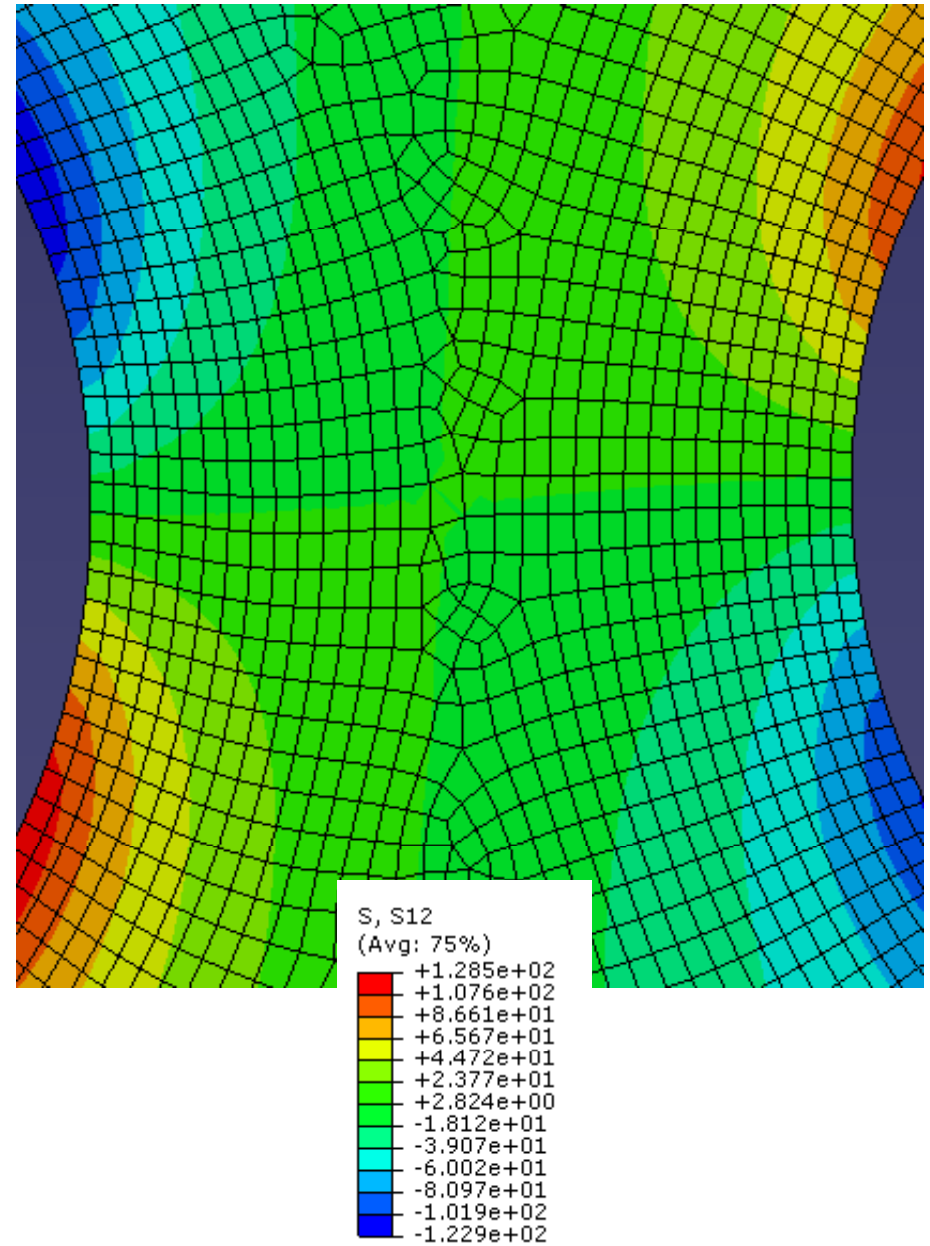

Outline

- Natural Fibre Composites
- X-ray tomography
- Results
- **Conclusions**



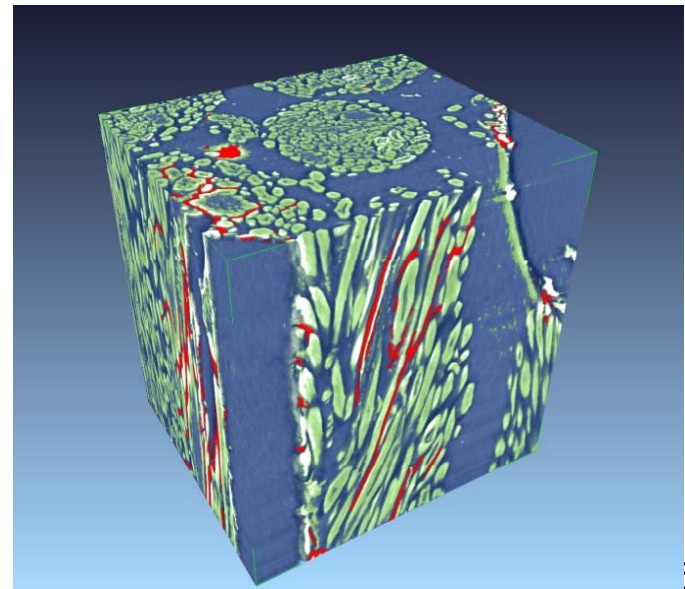


Conclusions

- Damage mechanisms
 - Splitting cracks driven by interfaces
 - Shear cracks
 - Fibre breaks

Microstructure has a large influence on damage evolution

- How to take these observations to the next level?
 - FEM simulation?
 - Displacement image correlations?
 - ...

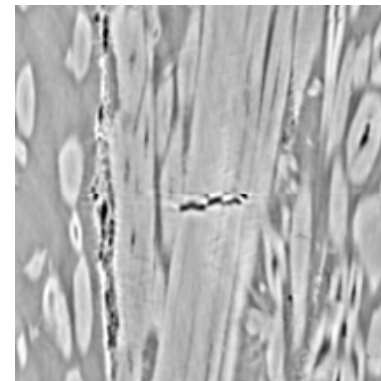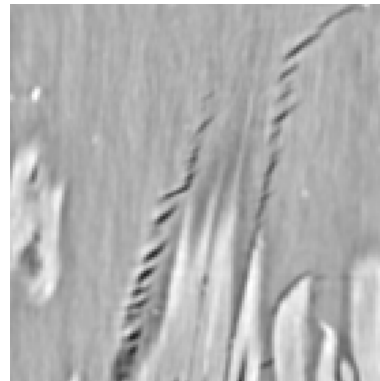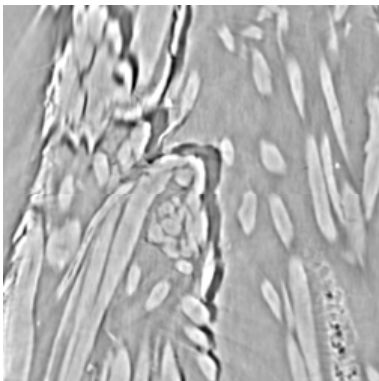

Acknowledgment

- The research leading to these results has received funding from the European Community's Seventh Framework Programme (FP7/2007-2013) under grant agreement no 214467 (NATEX)
- Tomcat beamline at Swiss Light source
- Professor Ian Sinclair, University of Southampton, for providing loading fixture

