



Process for the conversion of sugars to lactic acid and 2-hydroxy-3-butenoic acid or esters thereof comprising a metallo-silicate material and a metal ion

Holm, Martin Spangsberg; Irantzu, Sadaba Zubiri; Tolborg, Søren; Osmundsen, Christian Mårup; Taarning, Esben

Publication date:
2015

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Holm, M. S., Irantzu, S. Z., Tolborg, S., Osmundsen, C. M., & Taarning, E. (2015). Process for the conversion of sugars to lactic acid and 2-hydroxy-3-butenoic acid or esters thereof comprising a metallo-silicate material and a metal ion. (Patent No. WO2015024875 (A1)).

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal


If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.



- (51) International Patent Classification:
B01J 29/70 (2006.01) *C07C 69/68* (2006.01)
- (21) International Application Number:
PCT/EP2014/067475
- (22) International Filing Date:
15 August 2014 (15.08.2014)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
13181069.9 20 August 2013 (20.08.2013) EP
- (71) Applicant: HALDOR TOPSØE A/S [DK/DK]; Nymøllevej 55, DK-2800 Kgs. Lyngby (DK).
- (72) Inventors: HOLM, Martin Spangsborg; Solitudevej 6, 2. tv., DK-2200 Copenhagen N (DK). SADABA ZUBIRI, Irantzu; Herminggade 3, 2. th, DK-2100 Copenhagen (DK). TOLBORG, Søren; Lauggårds Allé 12, 1 TH, DK-2860 Søborg (DK). MÅRUP OSMUNDSEN, Christian; Jægersborg Alle 247, 3.tv., DK-2820 Gentofte (DK). TAARNING, Esben; Smallegade 24, 3th, DK-2000 Frederiksberg (DK).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report (Art. 21(3))

(54) Title: PROCESS FOR THE CONVERSION OF SUGARS TO LACTIC ACID AND 2-HYDROXY-3-BUTENOIC ACID OR ESTERS THEREOF COMPRISING A METALLO-SILICATE MATERIAL AND A METAL ION

Fig. 1

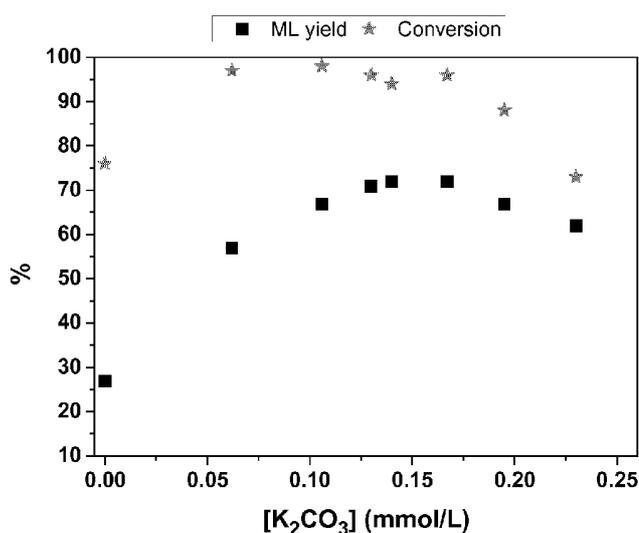

(57) Abstract: A process for the preparation of lactic acid and 2-hydroxy-3-butenoic acid or esters thereof from a sugar in the presence of a metallo-silicate material, a metal ion and a solvent, wherein the metal ion is selected from one or more of the group consisting of potassium ions, sodium ions, lithium ions, rubidium ions and caesium ions.

Title: Process for the conversion of sugars to lactic acid and 2-hydroxy-3-butenic acid or esters thereof comprising a metallo-silicate material and a metal ion.

5 Description:

The present invention relates to a novel process for the preparation of lactic acid and 2-hydroxy-3-butenic acid or esters thereof from sugars in the presence of one or more metallo-silicate materials and one or more metal ions.

Background:

Carbohydrates represent the largest fraction of biomass and various strategies for their efficient use as a feedstock for commercial chemicals are being established. Biomass is of particular interest due to its potential for supplementing, and ultimately replacing, petroleum. One such commercial chemical obtainable from biomass is lactic acid; a lactic acid derivative, methyl lactate, is a convenient building block towards renewable and biodegradable solvents and polymers.

Lactic acid derivatives, in particular esters of lactic acid, may be obtained from sugars via a variety of reaction processes including biochemical (enzymatic fermentation) and synthetic (catalytic conversion). Particular attention has been focussed on synthetic routes as they provide a commercially and environmentally advantageous alternative to biochemical routes.

EP 2 184 270 B1 and Holm *et. al.* Science (2010), 328, p 602-605 disclose the conversion of common sugars to lactic acid derivatives wherein a heterogenous zeotype or zeolite catalyst is employed. Specifically, the conversion of glucose, sucrose or fructose to methyl lactate is disclosed. A variety of heterogenous Lewis-acid zeotype catalysts are identified as particularly active catalysts for this conversion. Sn-BEA has been identified as one of the most selective catalysts, as illustrated by the conversion of glucose, fructose and sucrose to methyl lactate with yields of 43, 44 and 68% respectively. There is a desire to further improve the percentage yield of useful products such as lactate esters and esters of 2-hydroxy-3-butenic acid for this process.

15

In addition to the desire to improve the product yield of such processes using Sn-BEA as the catalyst, an increase in the product yield using alternative, easier to synthesize metallo-silicate catalysts would broaden the scope of catalysts suitable for industrially scaled processes. A particular advantage would be the application of an improved process and improved catalytic activity wherein the preparation of the catalyst itself is simplified and made suitable for industrial scale production.

25

Zeotype and zeolite catalysts comprising an active metal can be prepared by several methods including direct synthesis and post-synthesis preparations.

30

Direct synthesis methods, as described in EP 1 010 667 B1 and Chem Commun. (1997) pp 425-426, although very convenient for laboratory scale synthesis, may not be suitable

for industrial scale production. These direct synthesis procedures experience practical and environmental limitations posed by: the use of reagents comprising fluoride such as hydrogen fluoride (HF); lengthy synthesis times; 5 and the use of expensive organic templating agents which are difficult to reuse.

Recently, Hermans et al *Angew. Chem. Int. Ed.* (2012), 51, p 11736-11739, disclosed the preparation of Sn-BEA using a 10 post synthesis process that does not require the use of a fluoride reagent. The post synthesis process disclosed by Hermans comprises de-aluminating a commercially available zeolite (Al-BEA), physically mixing this de-aluminated zeo- 15 lite with a tin salt, followed by calcination of the de-aluminated zeolite and tin salt mixture. A general post-synthesis preparation method should thus include a step of defect generation in the silica framework via de- 20 aluminating or other similar procedure, for example de-boronation; and the addition of tin (Sn) and calcination, which produces the incorporation of Sn in the silica structure.

The post-synthesis preparation process has the advantages of: a short synthesis time; the possibility that large 25 amounts of active metal may be incorporated into the framework structures; and avoidance of the use of expensive organic templating and a reagent comprising fluoride. These advantages enable the process of preparing the Sn-BEA to be scalable and potentially suitable for industrial scale pro- 30 cesses. A similar post-synthesis methodology has also been applied to the synthesis of Sn-MWW: Qiang et al. *ChemSus-Chem* [vol 6, issue 8, 1352-1356, August (2013)].

For industrial scale catalyst production, it is a significant advantage if the metallo-silicate catalysts can be prepared by a post synthesis process; however, so far reported, all catalysts prepared by the post synthesis process are poor catalysts for the conversion of C6 sugars to lactate esters and esters of 2-hydroxy-3-butenoic acid. Only low yields of the desirable esters are obtained. See Example 1 of the present application.

Therefore there is a desire to improve both the percentage yield of the process of preparing lactic acid and 2-hydroxy-3-butenoic acid or esters thereof from sugars, in particular wherein the preparation of the catalyst is industrially feasible. It would be an additional advantage if the improvement could also broaden the scope of active catalysts suitable for this process and for an industrial scale.

Disclosure of the invention:

It has now been discovered that the presence of a metal ion, in particular an alkali earth metal ion and/or an alkali metal ion in the presence of a metallo-silicate material, can increase the percentage yield of lactic acid and 2-hydroxy-3-butenoic acid or esters thereof from sugars. Additionally, this improved process increases the activity of a variety of catalysts for this particular process.

It is particularly surprising that the presence of a metal ion, in particular an alkali metal ion or alkaline earth metal ion, improves the desired product yield of this reaction as several literature references disclose the detri-

mental effect of the presence of an alkali metal ion on the catalytic activity of TS-1 and Ti-BEA catalysts for oxidative catalytic reactions; or observe no change when added to Sn-BEA under conditions for the isomerisation of glucose to fructose. Bermejo-Deval et al [PNAS, June 19, vol 109, No 25, (2012)] and Khouw et al. J. Catal. 151, 77-86, (1995).

Additionally, it can be seen from Examples 13-20 of the present invention that specific concentrations of the metal ion provide improved yields of the desired products. Whilst not wishing the invention to be limited by these results, it can be observed that there may be specific ranges of metal ion concentrations that can be seen as an optimisation of the process conditions.

More specifically, the present invention relates to a process for the preparation of lactic acid and 2-hydroxy-3-butenic acid or esters thereof from a sugar in the presence of a metallo-silicate material, a metal ion and a solvent, said process comprising contacting the sugar or an isomer or derivative thereof with a metallo-silicate material. The mechanism of the process of the present invention is not fully understood; it may therefore be possible that the process may comprise contacting the sugar or an isomer or derivative thereof with a metallo-silicate material and the metal ion.

Lactic acid and 2-hydroxy-3-butenic acid or esters thereof means lactic acid and 2-hydroxy-3-butenic acid or one or more esters of lactic acid, such as methyl or ethyl lac-

tate, and one more esters of 2-hydroxy-3-butenic acid, such as methyl or ethyl 2-hydroxy-3-butenate.

Sugar relates to carbohydrates commonly found in biomass selected from one or more of the group consisting of glucose, fructose, mannose, sucrose, xylose, erythrose, erythrulose, threose and glycolaldehyde. The sugar may be in the form of an isomer of a sugar or a derivative of a sugar.

10

Metal ion relates to a metal ion originating from either the element itself or the salt of an alkali earth metal and/or an alkali metal. More specifically, the salt of the alkaline earth metal or alkali metal comprises at least one metal ion and at least one anion. Preferably the metal ion is selected from the group consisting of potassium, sodium, lithium, rubidium and caesium. Preferably the salt of the alkaline earth metal or alkali metal is selected from the group consisting of carbonate, nitrate, acetate, lactate, chloride, bromide and hydroxide. Even more preferably the metal ion originates from one or more salts of the alkaline earth metal or alkali metal selected from the group consisting of K_2CO_3 , KNO_3 , KCl , potassium acetate (CH_3CO_2K), potassium lactate ($CH_3CH(OH)CO_2K$), Na_2CO_3 , Li_2CO_3 , Rb_2CO_3 .

25

The metal ion may be introduced into the process of the present invention either as a component of the metallo-silicate material, or independently as, for example, a solid or dissolved in a solvent.

30

Metallo-silicate material (also known as metallo-silicates, metallo-silicate composition or metallo-silicate catalyst)

refers to one or more solid materials comprising silicon oxide and an active metal and/or metal oxide components, wherein the active metal and/or metal oxide components are incorporated into and/or grafted onto the surface of the silicon oxide structure (i.e. the silicon oxide structure comprises M-O-Si bonds). The silicon oxide structure is also known as a silicate. Metallo-silicate materials may display catalytic activity for the conversion of sugars to derivatives of lactic acid (e.g. esters of lactic acid or esters of 2-hydroxy-3-butenoic acid), lactic acid and 2-hydroxy-3-butenoic acid. Metallo-silicate materials may be crystalline or non-crystalline. Non-crystalline metallo-silicate materials include ordered mesoporous amorphous or other mesoporous amorphous forms. Crystalline microporous material includes zeolite materials and zeotype materials.

Zeolite materials are crystalline alumino-silicates with a microporous crystalline structure, according to Corma *et al.*, Chem. Rev. 1995, 95 pp 559-614. The aluminum atoms of the zeolite material may be partly or fully substituted by an active metal; these materials fall within the class of zeotype materials. For the purpose of this application zeotype materials encompass zeolite materials. Preferably the metallo-silicate material is selected from one or more of the group consisting of zeotype materials and ordered mesoporous amorphous silicates.

Active metal relates to the metal that is incorporated into the metallo-silicate material. Active metal means one or more metals selected from the group consisting of Sn, Ti, Pb, Zr, Ge and Hf. Examples of active metal precursors may

be tin chlorides or acetates, for example: SnCl₄; SnCl₂; Sn (IV) acetate; and Sn(II)acetate.

Preferably the active metal is selected from one or more of
5 the group consisting of Ge, Sn, Pb, Ti, Zr and Hf. Preferably the zeotype material has a framework structure selected from the group consisting of BEA (Beta), MFI, FAU, MOR and FER. Preferably the ordered mesoporous amorphous silicate
10 has a structure selected from the group consisting of MCM-41 and SBA-15. In a preferred embodiment, the metallo-silicate material is selected from the group consisting of Sn-BEA, Sn-MFI, Sn-FAU, Sn-MCM-41 and Sn-SBA-15.

A further aspect of the invention comprises the preparation
15 of metallo-silicate materials. Metallo-silicate materials may be prepared by a variety of processes including hydrothermal crystallisation, as described in US 6,306,364 B1; wherein a reaction mixture is prepared by combining reactive sources of tin, silicon an organic templating agent
20 and water. Alternatively, a zeolite material may be modified and combined with tin, as described in the post synthesis process disclosed by Hermans *et. Al.*, *Angew. Chem. Int. Ed.* (2012), 51, p 11736-11739. The post synthesis process disclosed by Hermans *et al.* comprises de-aluminating a
25 commercially available zeolite catalyst (Al-BEA), physically mixing this de-aluminated zeolite catalyst with a tin (Sn) salt followed by calcination of the de-aluminated zeolite and tin (Sn) salt mixture.

30 A further aspect of the present invention is the use of a metallo-silicate material prepared by a post synthesis process. Post synthesis process means a process comprising

preparing a material comprising framework defects and im-
pregnating the material with an active metal or active met-
al and metal ion. The process for preparing a material com-
prising framework defects is the selective removal of one
5 or more heteroatoms from a zeolite or zeotype material. The
selective removal of one or more heteroatoms from a zeolite
or zeotype material may be for example de-aluminating or
de-boronating a zeolite or zeotype material. The material
comprising framework defects is impregnated with an active
10 metal, or an active metal and a metal ion.

The process for preparing metallo-silicate materials or
metallo-silicate materials comprising a metal ion may com-
prise the steps:

15

- a. Providing one or more zeotype materials or meso-
porous amorphous silicate materials.
- b. De-aluminating or de-boronating the material of
step a.
- 20 c. Impregnating or mechanically mixing the product
of step b. with an active metal.
- d. Optionally adding a metal ion to step c.
- e. Optionally drying the product of step c or d.
- f. Calcining the product of steps c, d and e.

25

In a preferred embodiment step b. comprises heating the ma-
terial of step a. in acidic conditions or exposing the ma-
terial of step a. to steam and acidic conditions. In an em-
bodiment of the invention the material of step b. is fil-
30 tered, washed and dried. In an embodiment of the invention
the material of step b. is filtered, washed and calcined.

In a further preferred embodiment the material of step b. is filtered, washed, dried and calcined.

5 The heating of step b. may be at a temperature of between about 70 and 120 °C, between 70 °C and 100 °C, between about 70 °C and 90 °C, between 70 °C and 90 °C, preferably about 80 °C. The heating may occur over a period of time between 2 and 6 hours, between about 11 and 13 hours, between 11 and 13 hours.

10

Acidic conditions as described in the preferred embodiments of step b. may be concentrated acid solutions. Preferably the acid is selected from the group consisting of HNO₃, H₂SO₄ and HCl.

15

All calcination steps are carried out between 400 °C and 600 °C, between 500°C and 600 °C, between 520 °C and 580 °C, preferably between about 540 °C and about 560 °C. Calcination may occur over a period of time, for example between 20 about 5 and 7 hours, between 5 and 7 hours.

The proper use and understanding of the term impregnation is self-explanatory and lies well within the ability of a person skilled in the art of catalyst, including metallo-
25 silcate, preparation. Examples of impregnation techniques are provided in K.P. de Jong, Synthesis of Solid Catalysts, Wiley, 2009. ISBN: 978-3-527-32040-0.

A preferred embodiment of the impregnation of step c. is
30 incipient wetness impregnation. A general example of the incipient wetness impregnation technique is provided in Campanati et al. Catalysis Today 77 (2003) 299-314. Pref-

erably the impregnation comprises adding an aqueous solution of an active metal precursor to the solid of step b..

5 A further embodiment of the invention is the preparation of a metallo-silicate material wherein the products of steps d., e. and f. comprise a metal ion. The metal ion is introduced into the product by addition of a solution of the metal ion during the impregnation step of step c.

10 The present invention provides a process for the preparation of metallo-silicate materials and a process for the preparation of metallo-silicate materials comprising a metal ion (such as an alkaline earth metal ion or alkali metal ion).

15 The metallo-silicate materials prepared by post-synthesis treatment of silicates with an active metal by incipient wetness impregnation are a further aspect of the present invention. A preferred embodiment is a metallo-silicate material comprising a metal ion and prepared by a post synthesis process of the silicate with an active metal.

20

The metal ion may be introduced into the process of the present invention independently of the metallo-silicate material, for example by dissolving the metal ion in the reaction solvent. The metal ion may be dissolved in the reaction solution by adding the metal ion as a metal salt to the reaction solution or by dissolving the metal salt in a solvent and adding the dissolved metal salt to the reaction solution.

25

30

In a further embodiment of the invention, when any metallo-silicate material is used in conjunction with K_2CO_3 as metal ion source, the active metal to metal ion ratio may be between 1 and 20, preferably between 2 and 10.

5

In a further embodiment of the invention, when any Sn-BEA metallo-silicate material is used in conjunction with K_2CO_3 as metal ion source, the active metal to metal ion ratio may be between 1 and 20, preferably between 2 and 10. Any Sn-BEA metallo-silicate material means Sn-BEA or Sn-BEA comprising a metal ion.

10

In a further embodiment of the invention, when catalyst A (Sn-BEA) is used in conjunction with K_2CO_3 as metal ion source, the active metal to metal ion ratio may be between 1 and 20, preferably between 2 and 10, preferably between 3 and 7, more preferably between 3 and 6.

15

In a further embodiment of the invention, when catalyst A'' (Sn-BEA) is used in conjunction with K_2CO_3 as metal ion source, the active metal to metal ion ratio may be between 1 and 20, between 2 and 16, between 5 and 9.5.

20

In a further embodiment of the invention, when catalyst A is used in conjunction with K_2CO_3 as metal ion source, the initial concentration of the metal ion in the solvent is less than 0.5 mmol/L, equal to or less than 0.23, between 0.05 mmol/L and 0.25 mmol/L, between 0.06 mmol/L and 0.2 mmol/L, between 0.13 mmol/L and 0.17 mmol/L.

25

30

The reaction vessel/solution that is used in the process is heated to a temperature of less than 200 °C, preferably the

vessel is heated to between 100 °C and 180 °C; more preferably the vessel is heated to between 120 °C and 170 °C, even more preferably between 140 °C and 160 °C.

5 In a further embodiment of the invention the solvent is selected from one or more of the group consisting of methanol, ethanol, 1-propanol, 1-butanol and water.

In a further embodiment of the invention the percentage
10 yield of lactate from sugar is equal to or greater than 50 wt%, equal to or greater than 55 wt%, equal to or greater than 60 wt%, equal to or greater than 65 wt%, equal to or greater than 70 wt%, equal to or greater than 75 wt%.

15 In a further embodiment of the invention the percentage yield of methyl lactate from sugar is equal to or greater than 50 wt%, equal to or greater than 55 wt%, equal to or greater than 60 wt%, equal to or greater than 65 wt%, equal to or greater than 69 wt%, equal to or greater than 70 wt%,
20 equal to or greater than 75 wt%.

Additionally, the process for the preparation of lactic acid and 2-hydroxy-3-butenic acid or esters thereof of the current invention is suitable for both batch scale reactions and continuous flow reactions.
25

Examples:

The following examples are provided to illustrate the invention. The examples shall not be construed as a limitation of how the invention may be practised.
30

Method A: Method for preparing methyl lactate from sucrose
[16 hour reaction duration].

A stainless steel pressure vessel (40 cc, Swagelok) is
5 charged with a methanol (15.0 g; Sigma-Aldrich, >99.8%) so-
lution of the metal salt (metal ion source), sucrose (0.450
g; Fluka, >99.0%) and catalyst (0.150 g). The reactor is
closed and heated to 160 °C under stirring (700 rpm). The
reaction is continued at 160 °C for 16 h and after this pe-
10 riod, the reaction is quenched by submerging the vessel in
cold water. Samples from the reaction vessel are filtered
and analysed by HPLC (Agilent 1200, Biorad Aminex HPX-87H
column at 65 °C, 0.05 M H₂SO₄, 0.6 ml min⁻¹) to quantify un-
converted hexoses and dihydroxyacetone (DHA), glyceralde-
15 hyde (GLA); and GC (Agilent 7890 with a Phenomenex Solgel-
wax column) was used to quantify: methyl lactate (ML), me-
thyl vinylglycolate (MVG, methyl 2-hydroxy-3-butenate) and
glycolaldehyde dimethylacetal (GADMA).

20 The amount of metal salt is provided for all Examples via
the column entitled: 'initial metal ion concentration in
methanol'.

Method B: Method for preparing methyl lactate from sucrose
25 [4 hour reaction duration].

A method for preparing methyl lactate from sucrose as de-
scribed in Method A, with the exception that the reaction
duration is 4 hours.

Catalyst preparation:Catalyst A [Sn-BEA (Si/Sn = 125)]:

5 Commercial zeolite Beta (Zeolyst, Si/Al 12.5, ammonium form) is calcined (550°C for 6 h) to obtain the zeolite Beta H form (de-aluminated form) and treated with 10 grams of concentrated nitric acid (Sigma-Aldrich, 65%) per gram of zeolite Beta powder for 12 h at 80°C. The resulting solid
10 is filtered, washed with ample water and calcined (550°C for 6 h) to obtain the de-aluminated Beta solid.

The de-aluminated Beta solid is impregnated with Sn by incipient wetness methodology with a Sn/Si ratio of 125 using
15 the following method: tin (II) chloride (0.128 g, Sigma-Aldrich, 98%) is dissolved in water (5.75 mL) and added to the de-aluminated Beta (5 g). After impregnation the samples are dried 12 h at 110 °C and calcined (550°C for 6 h).

20 Catalyst A' [Sn-BEA (Si/Sn = 125) comprising a metal ion]:

Sn-BEA (Si/Sn = 125) comprising a metal ion is prepared according to a modification of the previous procedure (preparation of Catalyst A). Commercial zeolite Beta (Zeolyst,
25 Si/Al 12.5, ammonium form) is calcined (550°C for 6 h) to obtain the H form (de-Aluminated form) and treated with 10 g of concentrated nitric acid (Sigma-Aldrich, 65%) per gram of zeolite Beta powder for 12 h at 80°C. The resulting solid is filtered, washed with ample water and calcined (550°C
30 for 6 h) to obtain a de-aluminated Beta solid.

The de-aluminated Beta solid is impregnated with Sn and potassium ions by incipient wetness methodology to obtain a Sn/Si ratio of 125 using the following method: tin (II) chloride (0.125 g, Sigma-Aldrich, 98%) is dissolved in a
5 K₂CO₃ solution (5.75 mL of 0.0015 M in water) and added to the de-aluminated Beta (5 g). After impregnation the samples are dried 12 h at 110 °C and calcined (550°C for 6 h).

Catalyst A'' :

10

Sn-BEA (Si/Sn = 200) is prepared according to a modification of the route described in US 6,306,364 B1. TEOS (30.6 g; Aldrich, 98 %) is added to TEOH (33.1 g; Sigma-Aldrich, 35 % in water) under stirring, forming a two-phase system.
15 After 60-90 min, one phase is obtained. Tin(IV)chloride pentahydrate (0.26 g; SnCl₄·5H₂O, Aldrich, 98 %) is dissolved in water (2.0 mL) and added dropwise. The solution is then left for several hours under stirring until a viscous gel was formed. The gel is then mineralized by the addition of HF (3.1 g; Fluka, 47-51 %) in demineralized water
20 (1.6 g). A suspension of de-aluminated seeds of Sn-BEA (0.36 g) in demineralized water (3.0 g) is added, followed by manual mixing. The gel is homogenized and transferred to a Teflon-lined container and placed in a stainless steel
25 autoclave and heated statically at 140 °C for 14 days. The solid is recovered by filtration and washed with ample amounts of deionized water, followed by drying overnight at 80 °C in air. The synthesis is finalized by removing the organic template by heating the sample at 2 °C/min to 550
30 °C in static air and maintaining this temperature for 6 h.

Catalyst B [Sn-Y]:

Commercial zeolite Y (Zeolyst, Si/Al 50, hydrogen form) is treated with 10 grams of concentrated nitric acid (Sigma-
5 Aldrich, 65%) per gram of zeolite Beta powder for 12 h at 80°C. The resulting solid is filtered, washed with ample water and calcined (550°C for 6 h) to obtain de-aluminated Y.

10 The de-aluminated Y solid is impregnated with Sn by incipient wetness methodology with a Sn/Si ratio of 125 using the following method: tin (II) chloride (0.124 g, Sigma-
Aldrich, 98%) is dissolved in water (7.5 mL) and added to de-aluminated Y (5 g). After impregnation the samples are
15 dried for 12 h at 110 °C and calcined (550°C for 6 h).

Catalyst C [Sn-MCM-41]:

Sn-MCM-41 is prepared according to the method described by
20 Li, L. *et al.* [Green Chem. 2011, 13, 1175-1181]. In a typical synthesis hexadecyltrimethylammonium bromide (13.0 g; CTABr, Sigma >98%) is dissolved in water (38.0 g). Tetramethylammonium silicate (26.4 g; TMAS, Aldrich, 15-20 wt% in water) is added slowly. The mixture is stirred for 50 min.
25 Tin(IV)chloride pentahydrate ($\text{SnCl}_4 \cdot 5\text{H}_2\text{O}$; 0.179 g; Aldrich, 98 %) and HCl (0.605 g; Sigma-Aldrich, 37 wt%) are dissolved in water (2.1 g) and added slowly to the solution. The resulting mixture is stirred for 1.5 h and TEOS (12.2 g) is added. The mixture is stirred for another 3 h and
30 transferred to a Teflon lined autoclave and heated to 140 C for 15 h. The solid is recovered by filtration and washed with ample amounts of deionized water, followed by drying

overnight at 80 °C in air. The synthesis was finalized by removing the organic template by heating the sample at 2 °C/min to 550 °C in static air and maintaining this temperature for 6 h.

5

Examples 1-6:

Method A (16 h reaction) was followed using Catalyst A and the metal salt (metal ion source). Results are provided in Table 1.

10

Table 1:

Ex	Metal salt [Metal ion source]	Initial metal ion con- centra- tion in methanol (mmol/L) [M+]	Ratio of active metal to metal ion	Percentage Yield of methyl lactate	Total Conversion of Hexose Sugars
1	-	-	-	27	76
2	K ₂ CO ₃	0.13	5	72	96
3	KNO ₃	0.13	5	23	93
4	KCl	0.13	5	28	95
5	Potassium Acetate	0.13	5	39	95
6	Potassium lactate	0.13	5	46	95

15

Examples 7-10:

Method A (16 h reaction) was followed using Catalyst A and the metal salt (metal ion source). Results are provided in
 5 Table 2.

Table 2:

Ex	Metal salt [Metal ion source]	Initial metal ion con- centra- tion in methanol (mmol/L) [M+]	Ratio of active metal to metal ion	Percentage Yield of methyl lactate	Total Conversion of Hexose Sugars
2	K ₂ CO ₃	0.13	5	72	96
7	Li ₂ CO ₃	0.13	5	59	84
8	Na ₂ CO ₃	0.13	5	72	97
9	Rb ₂ CO ₃	0.13	5	67	98
10	CaCO ₃	0.13	5	18	94

10

Examples 11-17:

Method A (16 h reaction) was followed varying the type of metallo-silicate material. The metal salt used as a source
 15 of metal ions is K₂CO₃. Results are provided in Table 3.

Table 3:

Ex	Catalyst	Initial metal ion concentration in methanol (mmol/L) [M+]	Ratio of active metal to metal ion	Percentage Yield of methyl lactate	Total Conversion of Hexose Sugars
1	A	-	-	27	76
2	A	0.13	5	72	96
11	A'	-	7	71	96
12	A''	-	-	26	93
13	A''	0.13	3	58	73
14	B	-	-	11	67
15	B	0.13	5	67	97
16	C	-	-	20	79
17	C	0.13	3	52	89

5 Examples 18-23:

Method A (16 h reaction) was followed varying the concentration of the metal ion; the metal salt used as a metal ion source is K_2CO_3 . Catalyst A is used. Results are provided in Table 4.

10

Table 4:

Ex	Initial metal ion concentration in methanol (mmol/L) [M+]	Ratio of active metal to metal ion	Percentage Yield of methyl lactate	Total Conversion of Hexose Sugars
1	0	-	27	76
18	0.06	10.3	57	97
19	0.11	6.2	67	98
2	0.13	5.0	72	96
20	0.14	4.2	72	94
21	0.17	3.9	72	96
22	0.20	3.2	67	88
23	0.23	2.6	62	73

5 Examples 24-28:

Method A (16 h reaction) was followed varying the concentration of the metal ion; the metal salt used as a metal ion source is K_2CO_3 . Catalyst A'' is used. Results are provided in Table 5.

10

Table 5:

Ex	Initial metal ion concentration in methanol (mmol/L) [M ⁺]	Ratio of active metal to metal ion	Percentage Yield of methyl lactate	Total Conversion of Hexose Sugars
12	0	-	26	93
24	0.03	16.0	57	97
25	0.045	9.0	67	93
26	0.055	7.0	69	94
27	0.065	6.5	75	93
28	0.1	4.5	59	78
13	0.13	3	58	73

Examples 29-33:

5

Method B (4 h reaction) was followed varying the concentration of the metal ion; the metal salt used as a metal ion source is K₂CO₃. Catalyst B is used. Results are provided in Table 6.

10

Table 6:

Ex	Initial metal ion concentration in methanol (mmol/L) [M+]	Ratio of active metal to metal ion	Percentage Yield of methyl lactate	Total Conversion of Hexose Sugars
14	0	-	11	67
29	0.07	7.7	33	
30	0.10	6.3	45	
31	0.13	5.0	56	
32	0.17	4.0	44	
33	0.20	3.3	45	

5

Key:

[M+] = Metal ion concentration in the reaction solution.

10 [K₂CO₃] = Metal ion concentration; in this Example the metal ion is potassium originating from K₂CO₃.

% = Percentage Yield of methyl lactate

15

Conversion of Sugar = Total Conversion of Sugar Starting Material.

Figure 1: Examples 1, 2 and 18 to 23: Comparison of methyl lactate yield and conversion of sugar with variation of the metal ion concentration. Method A was followed using Catalyst A.

Figure 2: Examples 1, 2 and 12 to 17: Comparison of methyl lactate yield prepared via Method A using catalysts A, A'', B and C; wherein the reaction is carried out in pure methanol (i.e. without a metal ion), or methanol and a metal ion (i.e. potassium ions). Methyl lactate yield is significantly increased by the addition of a metal ion (i.e. potassium ions).


Claims:

1. A process for the preparation of lactic acid and 2-hydroxy-3-butenic acid or esters thereof from a sugar
5 in the presence of a metallo-silicate material, a metal ion and a solvent, said process comprising contacting the sugar with a metallo-silicate material, wherein the metal ion is selected from one or more of the group consisting of potassium ions, sodium ions, lithium ions, rubidium ions and caesium ions.
10
2. A process according to claim 1, wherein the metal ion is obtainable by the addition to the process of one or more compounds selected from the group consisting of K_2CO_3 , KNO_3 , KCl , potassium acetate (CH_3CO_2K), potassium lactate ($CH_3CH(OH)CO_2K$), Na_2CO_3 , Li_2CO_3 and Rb_2CO_3 .
15
3. A process according to claims 1 and 2, wherein the metallo-silicate material framework structure is selected from the group consisting of BEA, MFI, FAU, MOR, FER, MCM and SBA.
- 20 4. A process according to any one of claims 1 to 3, wherein the metallo-silicate material comprises an active metal selected from one or more of the group consisting of Sn, Ti, Pb, Zr, Ge and Hf.
- 25 5. A process according to any one of claims 1 to 4, wherein the metallo-silicate material is selected from the group consisting of Sn-BEA, Sn-MFI, Sn-FAU, Sn-MCM-41 and Sn-SBA-15.
- 30 6. A process according to any one of claims 1 to 5, wherein the sugar is selected from one or more of the group consisting of glucose, fructose, mannose, sucrose, xylose, erythrose, erythrulose, threose and glycolaldehyde.

7. A process according to any one of claims 1 to 6,
wherein the solvent is selected from one or more of
the group consisting of methanol, ethanol, 1-propanol,
1-butanol and water.
- 5 8. A process according to any one of claims 1 to 7,
wherein the ester of lactic acid is methyl lactate or
ethyl lactate.
9. A process according to any one of claims 1 to 8,
wherein the yield of methyl lactate is equal to or
10 greater than 69%.
10. A process according to any one of claims 1 to 9,
wherein the metallo-silicate material is prepared us-
ing a post synthesis process.
11. A process according to any one of claims 1 to 10,
15 wherein the metallo-silicate material is prepared by
impregnating a de-aluminated or de-boronated zeotype
material or mesoporous amorphous silicate material
with an active metal.
12. A process according to any one of claims 1 to 11,
20 wherein the metallo-silicate material is prepared by
impregnating a de-aluminated or de-boronated zeotype
material or mesoporous amorphous silicate material
with an active metal and a metal ion.


1/2

Fig. 1

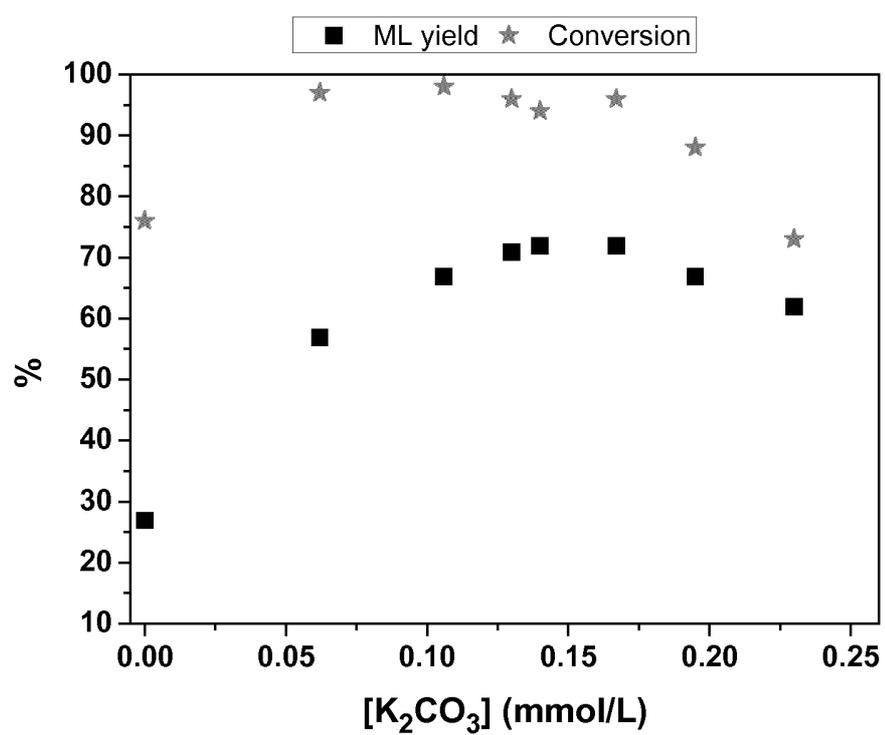

2/2

Fig. 2

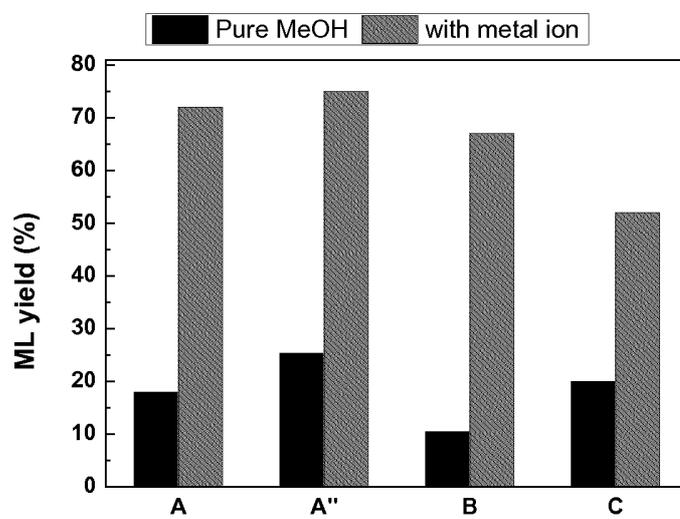

INTERNATIONAL SEARCH REPORT

International application No PCT/EP2014/067475

A. CLASSIFICATION OF SUBJECT MATTER
 INV. B01J29/70 C07C69/68
 ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
 B01J C07C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	QIANG GUO ET AL: "Highly Active and Recyclable Sn-MWW Zeolite Catalyst for Sugar Conversion to Methyl Lactate and Lactic Acid", CHEMSUSCHEM, vol. 6, no. 8, 17 June 2013 (2013-06-17), pages 1352-1356, XP055089633, ISSN: 1864-5631, DOI: 10.1002/cssc.201300160 cited in the application the whole document ----- -/--	1-12

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- | | |
|---|---|
| <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier application or patent but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> | <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</p> <p>"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</p> <p>"&" document member of the same patent family</p> |
|---|---|

Date of the actual completion of the international search

15 October 2014

Date of mailing of the international search report

21/10/2014

Name and mailing address of the ISA/
 European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

 Schoofs, Bart

INTERNATIONAL SEARCH REPORT

International application No PCT/EP2014/067475

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>CERI HAMMOND ET AL: "Simple and Scalable Preparation of Highly Active Lewis Acidic Sn-[beta]", ANGEWANDTE CHEMIE INTERNATIONAL EDITION, vol. 51, no. 47, 19 November 2012 (2012-11-19), pages 11736-11739, XP055093534, ISSN: 1433-7851, DOI: 10.1002/anie.201206193 cited in the application the whole document</p> <p align="center">-----</p>	1-12
A	<p>US 4 933 161 A (VAUGHAN DAVID E W [US] ET AL) 12 June 1990 (1990-06-12) cited in the application the whole document</p> <p align="center">-----</p>	1-12
A	<p>EP 2 184 270 B1 (TOPSOE HALDOR AS [DK]) 13 February 2013 (2013-02-13) cited in the application the whole document</p> <p align="center">-----</p>	1-12

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2014/067475

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4933161	A	12-06-1990	NONE

EP 2184270	B1	13-02-2013	AU 2009235999 A1 27-05-2010
			BR PI0904364 A2 15-03-2011
			CA 2684852 A1 11-05-2010
			CN 101898955 A 01-12-2010
			DK 2184270 T3 15-04-2013
			EP 2184270 A1 12-05-2010
			ES 2401537 T3 22-04-2013
			US 2010121096 A1 13-05-2010
