



Determining the extent of groundwater interference on the performance of infiltration trenches

Locatelli, Luca; Mark, Ole; Mikkelsen, Peter Steen; Arnbjerg-Nielsen, Karsten; Wong, Tony; Binning, Philip John

Published in:
Journal of Hydrology

Link to article, DOI:
[10.1016/j.jhydrol.2015.08.047](https://doi.org/10.1016/j.jhydrol.2015.08.047)

Publication date:
2015

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):
Locatelli, L., Mark, O., Mikkelsen, P. S., Arnbjerg-Nielsen, K., Wong, T., & Binning, P. J. (2015). Determining the extent of groundwater interference on the performance of infiltration trenches. *Journal of Hydrology*, 529, 1360-1372. <https://doi.org/10.1016/j.jhydrol.2015.08.047>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

1 **Determining the extent of groundwater interference on the performance of**
2 **infiltration trenches**

3 Luca Locatelli^a, Ole Mark^b, Peter Steen Mikkelsen^a, Karsten Arnbjerg-Nielsen^a, Tony Wong^c,
4 Philip John Binning^a

5

6 a) Technical University of Denmark, Dept. of Environmental Engineering, Miljoevej, Building 113,
7 2800 Kgs Lyngby, Denmark

8 b) DHI, Agern Allé 5, 2970 Hørsholm, Denmark

9 c) Cooperative Research Centre for Water Sensitive Cities, Monash University, Wellington Road,
10 Clayton, VIC 3800, Australia

11

12 **Corresponding author:** Luca Locatelli

13 E-mail: lulo@env.dtu.dk

14 Tel: +45 4525 1432

15

16 **ABSTRACT**

17 Infiltration trenches are widely used in stormwater management, but their capacity decreases when
18 installed in areas with shallow groundwater where infiltration is limited by groundwater drainage.
19 Here the hydrological performance of single infiltration trenches in areas with shallow water tables
20 is quantified in terms of their capability to reduce peak flow, peak volume and annual stormwater
21 runoff volume. To simulate the long term hydrological performance of infiltration trenches two
22 different models are employed. The models continuously simulate infiltration rates from infiltration

trenches using a 19 year rainfall time series from Copenhagen as input. The annual and single event stormwater runoff reduction from infiltration trenches was determined for 9 different scenarios that covered different soil conditions and infiltration trench dimensions. Monte Carlo simulations were used in order to quantify the impact of parameter variability for each scenario. Statistical analysis of the continuous long term model simulations was used to quantify the hydrological performance of infiltration trenches. Results show that infiltration trenches are affected by groundwater when there is an unsaturated depth of less than 1.5-3 m in sandy loam, 6.5-8 m in silt loam and 11-12 m in silty clay loam. A correction factor that can be applied for infiltration trench design when there is a shallow groundwater table is presented. The analyses showed that below a certain value of unsaturated depth the dissipation capacity of the mound/groundwater becomes the dominant process determining the infiltration capacity from infiltration trenches. In these cases it is essential to consider the local groundwater conditions in the infiltration trench design process.

1. INTRODUCTION

Infiltration trenches are employed in many countries for stormwater infiltration as part of Water Sensitive Urban Design (WSUD) which aims at improving urban stormwater management (Fletcher et al., 2014; Revitt et al., 2003; Wong and Brown, 2009). Infiltration trenches do not require the use of land surface areas which is a big advantage particularly in dense urban areas. However the city scale application of stormwater infiltration is constrained by the existing infrastructure and built environment, economical aspects, groundwater levels, local drinking water assets, soil pollution and stormwater runoff water quality (Göbel et al., 2004; Mikkelsen et al., 1994; Revitt et al., 2003).

Several studies have investigated the impact of widespread stormwater infiltration on the drainage system at the urban scale and shown an overall reduction of peak flows, stormwater runoff volume (Xiao et al., 2007; Holman-Dodds et al., 2003; Elliot et al., 2009), and combined sewer overflows (Roldin et al., 2012a; Peters et al., 2007). These studies agreed that the performance of infiltration systems is highly dependent on the local conditions, and particularly the physical properties of the

48 soil. However they did not explicitly account for the interaction of the infiltration system with
49 groundwater.

50 Models are often used to evaluate infiltration trench performance and Elliott et al. (2007) presented
51 a review of commercial software available for simulating the impact of WSUDs on the urban
52 drainage system. Manglik et al. (2004) showed a method to quantify the groundwater response from
53 multiple infiltration basins; Antia (2008) and Endreny and Collins (2009) showed case studies at the
54 urban residential area scale; Maimone et al. (2011), Ku et al. (1992), Jeppesen (2010) and Göbel et
55 al. (2004) presented case studies at the urban scale. These studies reached the conclusion that
56 widespread stormwater infiltration increases groundwater levels and can create surface runoff,
57 particularly for areas with poorly conductive soils and a shallow groundwater table; some of the
58 studies recommended groundwater control strategies when planning for large scale stormwater
59 infiltration.

60 A large number of studies have presented models to either design or predict infiltration rates from
61 single infiltration trenches. Guo (1998) presented a steady-state surface-subsurface model to design
62 trench infiltration basins taking into account the distance to the groundwater table; this model does
63 consider the formation of mounds below the infiltration system, transient processes that affect the
64 performances of the system and it neglects lateral infiltration from the basins. Dussaillant et al.
65 (2004) presented a three layer model with subsurface flow described by Richards' equation for
66 designing rain gardens; however this model also does not account for the formation of mounds
67 below the infiltration unit. Browne et al. (2008) presented a one-dimensional model for infiltration
68 rates from infiltration units that accounts for changing surrounding soil moisture conditions and the
69 continuous interaction between storage and surrounding soil; this model does not consider variation
70 in the depth of the saturated zone and horizontal infiltration from the sides of the infiltration unit.
71 Browne et al. (2012) presented a two-dimensional model to calculate infiltration rates from
72 stormwater infiltration systems but did not consider the effects of local mounds. Thompson et al.

73 (2010) used the software HYDRUS-2D to predict water-table mounding and the main factors
74 affecting the watertable beneath infiltration basins and showed that mound heights increased as the
75 thickness of both the unsaturated and saturated zones decreased and as the initial soil moisture,
76 basin size and ponding depth increased. Carleton (2010) simulated the effect of stormwater
77 infiltration from large basins on local groundwater mounding showing that analytical solutions
78 based on the Hantush equation (Hantush, 1967) underestimate the maximum height of groundwater
79 mounding by 15% when compared to finite-difference simulations. Roldin et al. (2013) presented a
80 model to simulate the infiltration rates from single infiltration trenches in the presence of
81 groundwater table showing that infiltration rates significantly reduce as the groundwater mound
82 gets closer to the bottom of the infiltration trench.

83 Others have examined the performance of infiltration systems in field experiments. Bergman et al.
84 (2011) and Warnars et al. (1999) collected data of inflow rates and water levels in experimental
85 infiltration systems to estimate hydraulic conductivity and the development of clogging. Machusick
86 et al. (2011) presented an equation describing the relationship between groundwater mounding,
87 precipitation and groundwater temperature for a experimental field of approximately 0.5 ha.

88 None of the papers reviewed above employed long term model simulation to quantify how the
89 hydrological performance of infiltration trenches is affected by the distance to the groundwater
90 table. Such a quantification is important because infiltration trenches are intended to be a key
91 element in water management of urban areas and so clear design rules should be available. Two
92 different models were used, one that considers the interaction with groundwater and one that does
93 not. The annual and single event stormwater runoff reductions from infiltration trenches were
94 quantified for 9 different scenarios that covered common soil types and infiltration trench designs
95 encountered in Denmark. This study also introduces a correction factor to be used in the design
96 process of infiltration trenches in the presence of a shallow groundwater table. This factor can be
97 used to correct the infiltration trench design volume to account for the effect of the distance

98 between the infiltration trench bottom and the groundwater. This factor is calculated for the 9
99 different scenarios as a function of the distance between the infiltration trench bottom and the
100 groundwater.

101 The results are intended to support practitioners and decision makers by quantifying key
102 hydrological performances and improving the actual design of infiltration trenches in the presence
103 of a shallow groundwater table.

104 **2. MATERIALS AND METHODS**

105 Figure 1 shows the system that is modeled in this paper. The infiltration trench has a width B , a
106 height H and a length L (perpendicular to the drawing) and receives stormwater runoff from the
107 connected impervious area. When the water level h in the infiltration trench is above 0, infiltration
108 occurs and when h exceeds the infiltration trench height H overflow to the sewer system occurs.
109 Infiltrated stormwater percolates and recharges the unconfined groundwater aquifer which has a
110 saturated thickness h_s . The unsaturated distance between the bottom of the infiltration trench and
111 the initial undisturbed groundwater table is here referred to as h_{us} . The height of the groundwater
112 mound below the centerline of the infiltration trench is called d . The groundwater is assumed to
113 have fixed head at a distance $1/2 L_{drain}$ from the center of the infiltration trench.

114 **2.1 The infiltration trench models**

115 Two different models were used in this study. The first model was developed by Warnars et al.
116 (1999) and Roldin et al. (2012b) and includes no groundwater interaction and so is referred to as the
117 ‘Simple Model’ (SM). The second model includes groundwater interaction (Roldin et al., 2013) and
118 is here referred to as ‘Model with Mounding’ (MM). Table 1 summarizes the parameters of the 2
119 models.

120 The mass balance of the infiltration trench is the same in both models and is given by:

$$B \cdot L \cdot \varphi \cdot \frac{dh}{dt} - Q_{in} + Q_{out} = 0 \quad (1)$$

where B is the width of the infiltration trench, L is the length of the infiltration trench, φ is the porosity of the infiltration trench filling material, h is the water level in the infiltration trench, Q_{in} and Q_{out} are the inflow and outflow rates from the infiltration trench, and t is time. The outflow from the infiltration trench Q_{out} is:

$$Q_{out} = Q_{infiltration} + Q_{sewer} \quad (2)$$

where $Q_{infiltration}$ is the infiltration rate and Q_{sewer} is the overflow rate to the sewer pipe.

The inflow to the infiltration trench Q_{in} is calculated as:

$$Q_{in} = ASR \cdot i \cdot (B \cdot H \cdot L \cdot \varphi) = Area \cdot i \cdot \varphi \quad (3)$$

where ASR (*Area/Storage Ratio*) is the design criteria defined as the connected impervious area per unit volume of infiltration trench [m^2/m^3]; i is the rain intensity, H the infiltration trench height and $Area$ is the connected impervious area. Equation (3) is written as above because typical design procedures specify the *Area/Storage Ratio* for a given infiltration trench geometry BHL , return period and connected impervious area. Here an infiltration trench design was selected for a number of scenarios according to Danish design standards (Petersen et al., 1994, 1995). The designs for these scenarios aim at storing the stormwater volume accumulated during design events of a specified return period determined using the Danish regional IDF curves (Madsen et al., 2009).

The infiltration trench in this paper was assumed to be infinitely long (no flow in the longitudinal direction of the infiltration trench). This assumption produces an underestimation of the hydrological performance since in reality the flow is 3-dimensional and some water will infiltrate through the ends of the trench. The underestimation is negligible for infiltration trenches where the length L is large compared to the cross section BH . The porosity of the filling material was assumed to be $\varphi=1$, i.e. the simulations represent infiltration trenches with a modern filling material having a

144 very high porosity. Such porous filling material is commonly used in Danish infiltration trenches
145 (Roldin et al., 2012a; Roldin et al., 2012b; Roldin et al., 2013) .

146 ***The ‘Simple model’ (SM)***

147 The Simple Model is based on the infiltration trench mass balance (Eq. 1) and the infiltration rate
148 $Q_{infiltrationSM}$ from the infiltration trench is calculated according to Eq. 4.

$$149 \quad Q_{infiltrationSM} = KBL + 2K(hL + hB) \quad (4)$$

150 Where B is the width of the infiltration trench, L is the length of the infiltration trench, h is the water
151 level in the infiltration trench, and K is the saturated hydraulic conductivity. This study assumes
152 isotropic, uniform and no-clogging conditions. This was done for simplicity and is justified by the
153 fact that infiltration tests often do not distinguish between vertical and horizontal hydraulic
154 conductivity, and guidelines like CIRIA (2007) suggest regular maintenance to ensure proper
155 infiltration rates. However, other studies assumed no infiltration from the bottom in order to safely
156 account for clogging. For example, Peters et al. (2007) measured infiltration rates through the sides
157 to be 3-4 times bigger than bottom infiltration rates. Bergman et al. (2011) showed that clogging
158 reduced initial infiltration rates of 2 infiltration trenches by a factor of 3-4 after 20 years of
159 operation. Roldin et al. (2012a) used a horizontal hydraulic conductivity 2 times higher compared to
160 the vertical. In this paper, horizontal and vertical hydraulic conductivity were gathered into a single
161 parameter K which can be interpreted as an effective saturated hydraulic conductivity.

162 ***The ‘Model with Mounding’ (MM)***

163 The Model with Mounding is based on the infiltration trench mass balance (Eq. 1) with the
164 infiltration rate being modified according to Eq. (5).

$$165 \quad Q_{infiltrationMM} = \frac{\theta_s - \theta(h_{us} - d)}{\theta_s - \theta(h_{us})} \cdot Q_{infiltrationSM} \quad (5)$$

166 where θ_s is the saturated moisture content, $\theta(h_{us}-d)$ is the moisture content at the bottom of the
 167 infiltration trench and $\theta(h_{us})$ is the moisture content at the bottom of the infiltration trench, which is
 168 located at the distance h_{us} above the groundwater table. Eq. (5) shows that the infiltration rate
 169 approaches that of the Simple Model (which is assumed to be equal to the hydraulic conductivity,
 170 i.e. a unit-gradient Darcy flux) when the mounding height d is small whereas it decreases as a
 171 function of the soil moisture retention curve and becomes 0 when the top of the mound d reaches
 172 the infiltration trench bottom (this means that the infiltration rate from the trench equals the
 173 groundwater mound dissipation rate when the mound approaches the bottom of the trench). In
 174 reality the mounding can grow up to the water level in the infiltration trench, this means that the
 175 infiltration in the Model with Mounding is underestimated especially when h_{us} approaches 0. In
 176 practice an infiltration trench with the bottom placed right at the ground water table height ($h_{us} = 0$
 177 m) would infiltrate some water whereas it does not in the model *MM*.

178 The water content θ is calculated according to the Van Genuchten soil moisture constitutive relation
 179 (Van Genuchten, 1980):

$$180 \quad \theta(\Psi) = \theta_r + \frac{\theta_s - \theta_r}{(1 + (\alpha|\Psi|)^n)^m} \quad (6)$$

181 where θ_r is the residual moisture content, θ_s is the saturated moisture content, ψ the pressure head
 182 and α , n and m are the specific soil parameters. Eq. (6) is applied with Eq. (5) using $\psi = h_{us} - d$ (see
 183 Figure 1).

184 The depth of the mound in the model *MM* of Roldin et al. (2013) is calculated at each model time
 185 step using the analytical solution of the Hantush equation based on a finite Fourier sine transform
 186 series (Rao and Sharma, 1983). The depth of the mound is then used to calculate the infiltration
 187 rates in Eq. (5) in the following time step. The analytical solution is a 2D solution that computes the
 188 height of the groundwater throughout the L_{drain} domain and assumes a constant water level at the
 189 boundaries of the domain. This boundary can be interpreted as an open water body, a stream or a

190 drainage pipe. The extent of the drainage area is defined by the parameter L_{drain} and the
191 groundwater domain is assumed to be symmetrical with respect to the center of the infiltration
192 trench.

193 **2.2 Model scenarios**

194 The two different infiltration trench models discussed in Section 2.1 were used to run continuous
195 simulations (transient simulations) of 19 years based on input rainfall data collected at a rain gauge
196 in Copenhagen between 1992 and 2010 (the rainfall time series has a 1 minute time step).

197 Continuous simulations show the time development of the groundwater mound, the water content in
198 the infiltration trench and the infiltration rates as a function of the input rainfall pattern and the
199 other model parameters. The model time step was set to be 10 minutes. The time step is a
200 compromise between calculation time and accuracy of the simulated 10 minute peak flow reduction
201 shown in Section 2.3. Computing all the simulations with a 1 minute time step would require
202 approx 90 days (using 9 processors) compared to 4 days when using a time step of 10 minutes. A
203 comparison between simulation results using 1 and 10 minute model time steps was made for 50
204 simulations (using the *SM*). The comparison showed that the 10 minute time step overestimates the
205 resulting peak flow reductions by an average of 4%. Campisano et al. (2015) presented a thorough
206 analysis considering several modeling time steps for rainwater tanks and showed less than 5%
207 difference in peak flow reduction going from a 5 minute to a 15 minute time step.

208 The ‘Model with Mounding’ was run with a 3 year warm up period (3 years of warm up followed
209 by 19 years of simulation) because the mound takes approximately 2 years to develop in the slowest
210 scenarios (The initial conditions of the warm up period are an empty infiltration trench, $h=0$ and a
211 flat groundwater table $d=0$). This suggests that the performance of infiltration trenches in areas
212 affected by shallow groundwater decreases during the period immediately after the installation until
213 the mound is fully established. The mound can develop in a few months in highly conductive soils,

214 while it can take several years in less conductive soils with a long drainage distance L_{drain} . The
215 ‘Simple model’ was run with the same warm up period although this was not strictly necessary.
216 9 different scenarios were run, each with approximately 1300 Monte Carlo simulations (tests
217 showed that more than 1000 simulations were needed to obtain good results). The idea behind these
218 scenarios was to cover typical soil types and different infiltration trench designs. The trench sized
219 were defined to be ‘small’, ‘medium’ or ‘large’. The parameter space was sampled using Latin
220 Hypercubic Sampling (Helton and Davis, 2003). The uncertainty (Zimerman, 2000) of the input
221 parameters (due to measurement uncertainty, spatial variability and design choices) was assumed to
222 have Normal, Log-normal and Uniform distribution depending on the parameters. The model
223 scenarios (S1-S9) with a description of the input parameter uncertainty are summarized in Tables 2
224 and 3.

225 Table 2 shows the *ASR* and the ‘Storage depth’ (defined as storage volume per impervious area or
226 the inverse of *ASR*) for the scenarios considered. B and H were varied according to common trench
227 geometries encountered in residential areas in Denmark. h_{us} was varied according to preliminary
228 results which determined the range of h_{us} affecting the infiltration trench performance. h_s was
229 assumed to vary between 1 and 10 meters in all the scenarios; this distance was chosen according to
230 preliminary results which showed that the saturated depth mostly influenced the infiltration trench
231 performance for $h_s < 10\text{m}$, however saturated thickness can be much larger (this means that results
232 slightly underestimate actual infiltration trench performance). L_{drain} was assumed to vary between
233 40 and 800 m. $\frac{1}{2} L_{drain}$ physically represents the distance to a open water body, a stream, a drainage
234 pipe, a foundation drain, or any other underground draining path that can be found in an urban area.
235 This distance was selected after considering the work of Malaguerra et al. (2012) who showed that
236 the median distance between thousands of drinking water wells in Denmark and streams is in the
237 order of 450-500 m.

238 Three different soils were considered for the model scenarios (as shown in Table 2): loamy sand,
239 silt loam and silty clay loam. The corresponding soil parameters were derived from Carsel et al.
240 (1988) and are summarized in Table 3.

241 **2.3 Model outputs**

242 We analyze three different model outputs:

- 243 • Annual storm water runoff reduction
- 244 • Single event stormwater runoff peak reduction
- 245 • Single event stormwater runoff volume reduction

246 Here the stormwater runoff reduction is defined as:

$$247 \quad reduction = 100 \left(1 - \frac{Q_{sewer}}{Q_{in}} \right) \quad [\%] \quad (7)$$

248 where Q_{in} is the storm water runoff inflow rate to the infiltration trench and Q_{sewer} is the overflow
249 rate to the sewer pipe. Results for *reduction* are shown per unit length of infiltration trench.

250 The annual stormwater runoff reduction, defined as the ratio between the annual infiltrated
251 stormwater volume and the annual stormwater inflow volume into the infiltration trench, was
252 calculated for each model scenario and for each year of the 19 year continuous simulation. The
253 results show the annual stormwater runoff reduction from the Monte Carlo simulations for both the
254 *SM* and the *MM*. Therefore the results will include both the effect of the input parameter uncertainty
255 and the inter-annual variability of annual stormwater runoff reduction.

256 Results are presented for two different cases, the case where groundwater does not affect the
257 performance of infiltration trenches (*SM*), and the case where it does (*MM*). The definition of
258 whether groundwater does or does not influence the infiltration trench performance was determined
259 as follows. The annual stormwater runoff reduction was found as a function of the unsaturated
260 depth (Model with Mounding) and then a threshold value above which the influence of unsaturated

261 depth becomes insignificant was determined. This threshold value was calculated for each scenario
262 and was defined as the point where the mean annual runoff from the Model with Mounding equals
263 95% of the mean annual runoff from the Simple Model.

264 For a better understanding of the uncertainty in the results, the annual stormwater runoff reduction
265 was also determined as a function of the most sensitive parameters (unsaturated depth h_{us} , saturated
266 depth h_s , length of the domain L_{drain} and infiltration trench cross section B).

267 Single rainfall events are defined as being separated by dry weather of more than one hour duration.
268 The single event peak flow and volume reductions were also calculated with both models. Single
269 event peak reduction is defined as the ratio between the maximum single event 10 minutes overflow
270 intensity from the infiltration trench (relative to the runoff area) and the maximum single event 10
271 minutes rainfall intensity. Single event volume reduction is defined as the ratio between the single
272 event overflow volume from the infiltration trench (relative to the runoff area) and the single event
273 rainfall volume. Results are shown as a function of the rainfall return period and for each of the 9
274 scenarios.

275 The single event peak and volume stormwater runoff reduction was obtained as follow:

- 276 • Compute the maximum 10 minute intensity and the total volume Q_{in} and overflow to the
277 sewer for each event in the simulated time series.
- 278 • Sort the 10 minutes intensities and the total volume of Q_{in} and overflow per event in
279 descending order.
- 280 • Calculate the single event peak reduction and the single event volume reduction as defined
281 above.
- 282 • Assign to each reduction a return period T [years] calculated using the Weibull (1939)
283 plotting position:

$$T = \frac{y+1}{r} \quad (8)$$

where y is the duration of the time series in years and r is the rank of the single rain event.

The results allow the calculation of the reduction for single rainfall events with a return period in the range of 5-10 and 0.5-1 years. 0.5-1 year return period events typically cause CSOs and sewer surcharge, and 5-10 years is the common design return period adopted in Denmark for urban drainage infrastructure.

Sensitivity analysis

A sensitivity analysis was carried out for the 9 scenarios and the two models using linear regression of Monte Carlo simulations (Sin et al., 2010) for the ‘annual stormwater runoff reduction’. The results show the standardized regression coefficients (Sin et al., 2010) for the parameters of the two models.

2.4 Correction factor

An empirical correction factor to be applied to the designed infiltration trench volume is proposed. Common tools available to design infiltration trenches use simple models that assume infiltration rates similar to Equation 4. The infiltration rates from such models are a function of the infiltration trench geometry and soil hydraulic conductivity. Nevertheless the formation of mounds reduces infiltration rates. We therefore present a correction factor β to calculate a corrected infiltration trench volume per unit length of infiltration trench BH_1 for cases influenced by mounding.

$$BH_1 = \beta \cdot BH \cdot \varphi \quad (9)$$

The correction factor will be presented as a function of unsaturated depth h_{us} for the 9 scenarios introduced in Section 2.3, and BH is the infiltration trench cross section volume per unit length. β is calculated using the Model with Mounding and with the following procedure for each of the 9 scenarios:

- Select the parameters of an average performing infiltration trench (according to the results that show average reduction and corresponding uncertainty bounds) of 1x1m cross section. The average performing infiltration trench is an infiltration trench having mean annual runoff reduction from the *MM* model similar to the mean annual runoff reduction from the *SM* model.
- Select a discrete number of unsaturated depths h_{us} at which β will be computed.
- The parameter β was obtained by parameter optimization using the Model with Mounding. The objective function was the mean annual runoff reduction obtained from the Simple model and shown later in Figure 2. Optimization was done using the *DREAM* optimization software (Vrugt et al., 2009) which employs the Shuffled Complex Evolution Algorithm.

3 RESULTS

3.1 Annual stormwater runoff reductions

Figure 2 shows the annual runoff reduction from the Simple Model. These results are considered valid for infiltration trenches without the influence of groundwater, i.e. infiltration trenches that are above a certain distance h_{us} from the groundwater; later in this section we discuss the effect of the distance h_{us} on infiltration trench performance. The uncertainty bounds of annual runoff reduction include the effect of inter-annual variation and uncertainty of model input parameters and particularly K . The effect of inter-annual variation of annual runoff reduction was estimated to influence the mean annual runoff reduction by 10-15%. Locatelli et al. (2015) showed that a soakaway of $1.9 \text{ m}^3/\text{m}^2$ in a soil with $K=8.2 \cdot 10^{-7} \text{ m/s}$ has an annual runoff reduction of 68–87% depending on the year. The results show that:

- Infiltration trenches in loamy sand reduce annual runoff by an average of 92-100% with limited uncertainty and thus high confidence. This suggests that infiltration trenches in

- loamy sand, i.e. in soils with an average hydraulic conductivity in the order of $4 \cdot 10^{-5}$ m/s, that are designed to have at least 4-5 mm of storage depth (S1) and are not influenced by groundwater, have an annual runoff reduction in the order of 92%.
- Infiltration trenches in silt loam reduce annual runoff by an average of 61-73% with a great uncertainty. This suggests that infiltration trenches in silt loam, i.e. in soils with an average hydraulic conductivity on the order of $1 \cdot 10^{-6}$ m/s, can significantly reduce annual runoff; however their performance is highly uncertain.
 - Infiltration trenches in silty clay loam reduce annual runoff by an average of 38-57% with a large uncertainty. This suggests that infiltration trenches in silty clay loam, i.e. in soils with an average hydraulic conductivity in the order of $2 \cdot 10^{-7}$ m/s, can contribute up to an average of 57% annual runoff reduction; however their performance is highly uncertain.

Overall results show a relatively small (up to a 20%) increase in annual runoff reduction going from ‘small’ infiltration trenches to ‘large’ ones (from S1 to S3, from S4 to S6 or from S7 to S9). Increasing infiltration trench size from ‘small’ to ‘large’ requires a significant increase in storage depth (see Table 2), e.g. the storage depth in the silty clay loam from scenarios S4 to S6 triples. This suggests that infiltration trenches designed to handle low return period events are likely to be more efficient (*efficiency = annual infiltrated stormwater / storage depth*) for annual runoff reduction than infiltration trenches designed to handle higher return period events. A similar conclusion was also given by Locatelli et al. (2015). Freni et al. (2009) showed that an infiltration unit of $0.4 \text{ m}^3/100\text{m}^2$ (*storage depth = 4 mm*) in different soils with hydraulic conductivity within $6.1 \cdot 10^{-6}$ and $1 \cdot 10^{-4}$ m/s could reduce the 6-year stormwater runoff by 28-80% depending on the local soil conditions.

Figure 3 shows the annual stormwater runoff reductions from the Model with Mounding as a function of the unsaturated depth h_{us} . The results confirm that the mean annual runoff reduction decreases to 0 as the unsaturated depth decreases to 0. Figure 3 shows that the annual runoff

reduction tends to a constant value (that is the same as the one obtained from the Simple Model) as the unsaturated depth increases above a certain threshold value. The threshold value of unsaturated depth was computed and shown in Table 4 for each scenario. The table shows that infiltration trenches implemented as shown in Figure 1 are not affected by groundwater if the unsaturated depth is above $\approx 1.5\text{-}3\text{m}$ in loamy sand; above $\approx 6.5\text{-}8\text{ m}$ in silt loam and above $\approx 11\text{-}12\text{ m}$ in silty clay loam. There seems to be a decreasing trend in the threshold value within scenarios of the same soils for increasing infiltration trench storage depth (going from S1 to S3, or from S4 to S6). This is likely because the same infiltration trench cross section infiltrates less water as the *Area/Storage ratio* decreases (going from S1 to S3, or from S4 to S6) since less area is drained into a given trench volume; this results in a lower groundwater mound and thus a infiltration trench that can be constructed with a lower unsaturated depth.

366 **The effect of hydraulic conductivity K variability on annual runoff reduction.**

367 Figure 4 shows the annual stormwater runoff reduction for the SM and MM as a function of the
368 hydraulic conductivity K . Results are only shown for the MM when the h_{us} influences the annual
369 runoff performance of infiltration trenches, as shown in Table 4.

370 The uncertainty bounds for the SM (Figure 4a, 4b, 4c) are small and include the effect of B , H , ASR
371 variability and inter-annual variations. These results help understanding the uncertainty bounds
372 shown in Figure 2, and clearly show that the uncertainty was mainly due to the variability of K . The
373 uncertainty bounds for the MM (Figure 4d, 4e, 4f) are wider and include the variability of B , H ,
374 L_{drain} , h_s , ASR , inter-annual variations, and are mostly due h_{us} variability (K and h_{us} were found to be
375 the 2 most influential parameters as shown later in the sensitivity analysis). These results help
376 understanding the uncertainty bounds shown in Figure 3, and show that K variability significantly
377 contributed to such uncertainty.

378 Overall results show great variation of annual runoff reduction in the K domain except for S1
379 (Figure 4a). This means that infiltration trenches in loamy sand, i.e. in soils with an average
380 hydraulic conductivity in the order of $4 \cdot 10^{-5}$ m/s without the influence of groundwater, are most
381 likely to give more than 78% annual runoff reductions if infiltration trenches are designed to have at
382 least 4-5 mm of storage depth (S1 in Table 2).

383 Figure 4b and 4c (S4 to S5), i.e. infiltration trenches in silt loam and silty clay loam without the
384 influence of groundwater, show annual runoff reduction in the range of 50-100% if the hydraulic
385 conductivity is above K_{mean} , however annual runoff reduction is significantly decreased for $K <$
386 K_{mean} .

387 Figure 4b, 4c, 4d and 4f, i.e. infiltration trenches in silt loam and silty clay loam, show that the
388 annual runoff reduction is highly reduced for hydraulic conductivity $< 1 \cdot 10^{-7}$ m/s.

389 These results suggest that it is relevant to check the spatial variability or site-to-site variability of K .
 390 Local infiltration tests are recommended as suggested in many guidelines. Moreover infiltration
 391 trenches in soils with K on the order of $1 \cdot 10^{-7}$ m/s show average annual runoff reductions of 16-70%
 392 and require large storage depth 36-83 mm, much less efficient than in sandy loam. Bockhorn et al.
 393 (2014) showed that point measured infiltration rates are often an order of magnitude lower when
 394 compared to infiltration rates measured in full trench infiltration tests in clay till and sandy clay till.
 395 This suggests that the infiltration process from infiltration trenches is likely to be a function of
 396 higher values than the locally measured K_{mean} . This implies that modeled infiltration rates of an
 397 infiltration unit using the mean hydraulic conductivity are likely to underestimate trench
 398 performance.

399 Similar results were found in the literature. Bergman et al. (2011) modelled the performance of 2
 400 infiltration trenches of 8 m^3 connected to an impervious area of 600 m^3 (this corresponds to 75 m^2
 401 of impervious area for every 1 m^3 of storage; or a *storage depth* of 13 mm). For K in the range of
 402 $3 \cdot 10^{-7}$ - $2 \cdot 10^{-6}$ m/s they reported an annual runoff reduction of 94% and for K in the range of $3 \cdot 10^{-7}$ -
 403 $2 \cdot 10^{-6}$ m/s they reported 40%. Freni et al. (2009) modeled an infiltration trench of $0.4 \text{ m}^3/100\text{m}^2$
 404 (storage depth = 4 mm) and reported annual stormwater runoff reductions of 28-30% in sandy-
 405 loam; 34-39% in loamy-sand; 38-66% in sand and 45-80% in gravel.

406 **The effect of B , h_s , L_{drain} variability on annual runoff reduction.**

407 Figure 5 shows the mean annual stormwater runoff reduction as a function of the infiltration trench
 408 width B (Figure 5a for *SM* and 5b for *MM*), the saturated depth h_s (Figure 5c), and the draining
 409 length L_{drain} (Figure 5d). The uncertainty bounds were not shown in order to make the Figure easier
 410 to read, but uncertainties are of the same order of magnitude as those presented in Figure 3 and 4.

411 Figure 5a and 5b show that there is an almost linear relationship between annual runoff reduction
 412 and infiltration trench width B ; the annual runoff reduction decreases as B increases. This result can
 413 be explained by noting that for a given *ASR* (*Area/ Storage Ratio*) and H ; a larger B means a larger

414 connected impervious area, and a lower ‘wetted area/storage volume ratio’ of the infiltration trench.
415 Moreover the results from *MM* (Figure 5b) show larger slopes compared to the results from *SM*
416 (Figure 5a) and this is likely because for a given *ASR* (*Area/ Storage Ratio*) and *H*, infiltration
417 trench performance is affected by the infiltrated volume: the larger the *B*, the larger the infiltrated
418 volume, the larger the mounding depth. The influence of the infiltration trench height *H* is not
419 shown as results are similar to the ones of *B*.

420 Figure 5c shows that the annual runoff reduction increases with saturated depth. This is because the
421 higher the saturated depth, the higher the aquifer transmissivity and thus the lower the mounding
422 height and the higher the infiltration rates. Similar observations were also made by Thompson et al.
423 (2010) and Guo (1998). The loamy sand scenarios (*S1*, *S2* and *S3*) show a higher variation of
424 annual runoff reduction in the h_s range of 0-3m than silt loam scenarios (*S4*, *S5* and *S6*), and even
425 more than silty clay loam scenarios (*S7*, *S8* and *S9*). This is likely because of the model setup, i.e.
426 as h_s approaches 0, the groundwater dissipation also becomes 0 (for fixed groundwater gradients)
427 and thus also the annual runoff reduction tends to 0. Annual runoff reduction is significantly
428 reduced for a saturated depth h_s below 2-3m, particularly in sandy loam. This suggests that when
429 implementing infiltration trenches it is relevant to have a saturated depth of at least couple of meters
430 and that a higher saturated depth is to be preferred.

431 Figure 5d shows that annual runoff reduction decreases as L_{drain} increases. This is because the larger
432 the drainage length the lower the groundwater gradients and thus the higher the mounding and the
433 lower the annual runoff reduction. The L_{drain} is shown to be most influential in the sandy loam
434 scenarios. These results underline the importance of taking into account groundwater drainage when
435 infiltration trenches are implemented in shallow groundwater areas, particularly in sandy loamy
436 soils.

437

438 **3.2 Single event peak and volume stormwater runoff reductions**

439 Figure 6 shows the single event peak and volume reduction for rain events of 0.5-1 year return
 440 period using the two models. For the given time series, 0.5-1 year return period events have a
 441 maximum 10 minute intensity in the range of 33-43 mm/h and a total rainfall volume per event in
 442 the range of 23-28 mm. Similar trends are observed for both the peak reduction results (Figure 6, a
 443 to c) and volume reduction (Figure 6, d to f).

444 Infiltration trenches in loamy sand that are designed for a 1 year return period or more (S2 and S3)
 445 show average peak and volume reduction above 94% if not affected by groundwater (SM), and 62-
 446 67 % with large uncertainty if close to the groundwater (MM). Infiltration trenches in loamy sand
 447 can contribute significantly to peak and volume runoff reduction for rain events of 0.5-1 year return
 448 period, however if the unsaturated depth is $< 1.5-3$ m the performance can be significantly reduced
 449 (Figure 3). Infiltration trenches in loamy sand, i.e. in soils with an average hydraulic conductivity in
 450 the order of $4 \cdot 10^{-5}$ m/s and without the influence of groundwater, can be designed to significantly
 451 reduce peak runoff and volume from rain events of 0.5-1 year return period; however their
 452 performance becomes uncertain for an unsaturated depth less than 1.5-3 m.

453 Infiltration trenches in silt loam show a highly uncertain peak and volume reduction with an
 454 average of 36-68 % if not affected by groundwater (SM), and 18-37 % if close to the groundwater
 455 (MM). Infiltration trenches in silt loam can contribute to peak runoff reduction for rain events of
 456 0.5-1 year return period, however their performance is highly uncertain.

457 Infiltration trenches in silty clay loam show a highly uncertain peak volume reduction with an
 458 average of 16-43 % if not affected by groundwater (SM), and 5-18 reduction if close to the
 459 groundwater (MM). Infiltration trenches in silt clay loam can contribute to peak and volume runoff
 460 reduction for rain events of 0.5-1 year return period, however their performance is highly uncertain
 461 and quite low also considering the large storage depth required in such a soil.

462 Figure 7 shows the single event peak and volume reduction for rain events of 5-10 year return
 463 period using the two models. For the given time series it was calculated (not shown) that 5-10 year

464 return period events have a maximum 10 minute intensity in the range of 64-67 mm/h and a total
 465 rainfall volume per event in the range of 46-55 mm. Similar trends are observed when comparing
 466 the peak reduction results (Figure 7, a to c) and volume reduction results (Figure 7, d to f).

467 Results from loamy sand scenarios and *SM*, i.e. for infiltration trenches that are not affected by
 468 groundwater, show that even an infiltration trench designed for a 0.1 y return period (S1) can
 469 contribute with an average 37% reduction of single event runoff volume for 5-10 year return period
 470 events (Figure 7d). Moreover, if infiltration trenches not affected by groundwater are designed to
 471 handle 10 year return period events they can reduce on average 88-95% of the peak and volume
 472 from single events (Figure 1a and 1d). However, infiltration trenches that are affected by
 473 groundwater, i.e. for unsaturated depths <1-5-3m, show single event peak and volume reductions
 474 significantly lower and with a higher uncertainty. Infiltration trenches not affected by groundwater
 475 and in loamy sand, i.e. in soils with an average hydraulic conductivity in the order of $4 \cdot 10^{-5}$ m/s, can
 476 significantly contribute to reduce peak and runoff volume from rain events of 5-10 year return
 477 period.

478 Results from the silt loam scenarios show that infiltration trenches not affected by groundwater can
 479 contribute with an average 8-54% reduction (*SM*) of single event runoff peak and volume for 5-10
 480 year return period events; and 4-23% (*MM*) if affected by groundwater. Both the *SM* and *MM* show
 481 large uncertainties. Even though infiltration trenches in silt loam might contribute to volume runoff
 482 reduction of 5-10 year return period events, the performance is highly uncertain and to obtain
 483 significant reductions a large storage depth is required (at least 36-50mm of storage depth; S5,
 484 Table 2).

485 Infiltration trenches in silty clay loam show very low peak and volume reductions for 5-10 year
 486 return period events. Some reduction can be achieved by S9, however that scenario requires
 487 infiltration trenches of 67-83 mm storage depth (Table 3) which is large. This suggests that
 488 infiltration trenches in silty clay loam, i.e. in soils with an average hydraulic conductivity in the

order of $1 \cdot 10^{-7}$ m/s, are not likely to be a good solution for single event peak and volume reduction of events of 5-10 year return period.

Campisano et al. (2011), reported a single event peak flow (for a selected design storm event) reduction of <7% for an infiltration trench of 24 mm storage depth in soils with $K \leq 10^{-6}$ m/s, and a reduction of 37% in soils with $K = 10^{-5}$ m/s.

Overall, results show that even if infiltration trenches are designed to handle peak and volume from 5-10 year return period events, their performance is highly uncertain with the exception of infiltration trenches in sandy loam without the influence of groundwater. It can also be seen that when infiltration trenches are designed to handle 5-10 year return period events they must have a large storage depth. These results suggest that infiltration trenches should not be designed with the aim of reducing single events peaks and volume from 5-10 year events. Moreover, infiltration trenches designed to handle more frequent 0.5-1 year return period events can contribute to reduce peak and volume runoff but with high uncertainty. It should be noted that changing the design from a 0.1 year return period design to a 1 year return period requires a 2-3 times increase storage. This suggests that infiltration trenches should be used primarily the aim of reducing annual runoff. Having smaller storage depths also reduces the total infiltrated amount resulting in lower mounds. A similar conclusion was found by Locatelli et al. (2015), who showed that peak flows can be handled more efficiently by detention volumes rather than infiltration trenches.

3.3 Sensitivity analysis

The results of the sensitivity analysis for the two models are shown in Figure 8. For simplicity only the results from Scenario 5 are reported since there is not a significant difference in parameter sensitivity for the 9 scenarios. Sensitivity of the single event peak and volume reduction was also determined for Scenario 5 with similar results.

512 The most influential parameter on the annual runoff reduction for the Simple Model is the hydraulic
513 conductivity K . *Area/Storage Ratio*, B and H have a lower sensitivity scores and are shown to be
514 negatively correlated, i.e. the higher the parameter the lower the annual runoff reduction. The
515 sensitivity of the cross section $B \cdot H$ was similar to that of H and B individually, meaning that a
516 smaller cross section would on average result in higher annual runoff reductions. This is because for
517 a given *ASR* (*Area/ Storage Ratio*), a larger the cross section BH results in a larger connected
518 impervious area and a smaller wetted area/storage volume ratio of the infiltration trench. However
519 this holds only for long infiltration trenches where the length L is much larger than the cross
520 section.

521 The most influential parameters for the Model with Mounding are the hydraulic conductivity K and
522 the unsaturated depth h_{us} , whereas the *Area/Storage Ratio*, the saturated depth h_s , the length of the
523 model domain L_{drain} , B and H have a lower sensitivity score. h_s is shown to be negatively correlated
524 to annual runoff reduction, i.e. the higher the saturated depth, the higher the aquifer transmissivity
525 and thus the lower the mounding height and the higher the infiltration rates. L_{drain} is also negatively
526 related to the annual runoff reduction. The extent of the drainage length L_{drain} influences the
527 equilibrium depth of the groundwater mound and thus the infiltration capacity from the infiltration
528 trench, i.e. the higher the drainage length, the higher the height of the mound for a given gradient,
529 resulting in lower infiltration rates. The soil parameters n , θ_s , θ_r and α are shown to be the least
530 influential parameters for the Model with Mounding. These parameters define the soil moisture
531 distribution in the unsaturated zone. For example, the parameter α (the most influential of the
532 parameters shown in Figure 8) controls the capillary height and its influence on the infiltration
533 trench performance is expected to increase when the distance between the bottom of the infiltration
534 trench and the groundwater table is in the same order of magnitude as the capillary height. B and H
535 are negatively correlated for the same reasons as mentioned above. Similar observations were
536 reported by Maimone et al. (2011) and Manglik et al. (2004).

537 3.4 Correction factor

538 Figure 9 shows the correction factor as a function of the unsaturated depth. The results show that
539 the correction factor increases rapidly and that there is a critical unsaturated depth below which the
540 correction factor cannot influence the infiltration trench performance. This critical depth h_{us} is
541 approximately 1-2m in loamy sand and 2-4m in silt loam and silty clay loam (see table 4). However
542 the magnitude of this critical depth was only derived from a single simulation for each scenario.
543 Moreover results are affected by model assumptions. For example, as already introduced in Section
544 2.1, the *MM* model underestimates the performance of infiltration trenches for h_{us} approaching 0
545 meaning that the critical depth is underestimated.

546 These results suggest that below a certain value of unsaturated depth the dissipation capacity of the
547 mound/groundwater becomes the dominant process determining the infiltration capacity from
548 infiltration trenches, i.e. no matter how big the correction factor is, the infiltration trench
549 performance is dictated by the mounding/groundwater dissipation capacity. When multiple
550 infiltration trenches are implemented in the same area this effect becomes even more relevant. This
551 suggests that when infiltration trenches are designed in an area of shallow groundwater, the design
552 should be based on the local groundwater dissipation capacity and that proper groundwater drainage
553 should be the primary consideration.

554 3.5 Model limitations

555 The *MM* model assumes that the mound height cannot exceed the infiltration trench bottom. This is
556 not realistic since in reality it can reach the water level in the infiltration trench. This implies an
557 underestimation of infiltration rates that increases as the unsaturated depth h_{us} decreases to 0.

558 The inflow rate Q_{in} to the infiltration trench was assumed to be the same as the rainfall measured at
559 the rain gauge, i.e. no initial loss was considered and there was no routing of the runoff from the

560 impervious area to the infiltration trench. This implies a slight underestimation of the performance
561 of infiltration trenches.

562 The infiltration trench was assumed to be infinitely long, i.e. no-flow in the longitudinal direction,
563 this implies an underestimation of the infiltration rates as the infiltration trench length L decreases
564 to 0. The results presented in the paper underestimate performance for infiltration trenches where
565 the length L is in the same order of magnitude as B and H (e.g. for near-square trench). Moreover,
566 this model assumed an initially flat water table. However in reality there are small groundwater
567 gradients that would produce asymmetric mounding and dissipation rates. However the impact is
568 expected to be small, especially in areas of small groundwater gradients.

569 The models assumed isotropic and uniform conditions, i.e. the infiltration rate per unit wetted area
570 of infiltration trench is assumed to be equal to the saturated hydraulic conductivity (i.e. unit-
571 gradient Darcy flow). However the horizontal hydraulic conductivity is generally higher than the
572 vertical and heterogeneity and macro-pores are likely to increase the infiltration rates.

573 Clogging was not included into the model. This implies that the simulated performance of the
574 infiltration trenches is overestimated (Bergman et al., 2011). Clogging is important to be considered
575 where the periodic maintenance of infiltration systems is not planned.

576 This model assumes infiltration only from a single unit, whereas in reality multiple units would be
577 installed. Widespread stormwater infiltration increases the groundwater levels and reduces the
578 infiltration rates compared to our model.

579 In this paper a model with all of the above simplifications is employed, even while knowing that
580 they cannot be completely justified. This was done because this model is the most realistic one that
581 is still simple enough to run long-term simulations and complete the statistical analysis presented.
582 More detailed models would be much more computationally expensive. Our results provide a first
583 insight and demonstrate that more work is still needed such as simulations of the effects of multiple

584 infiltration trenches placed close to each other and representing groundwater mounds above the
585 trench bottom in the model.

586 **4 CONCLUSIONS**

587 This paper presents model results that quantify the effects of infiltration trench geometry, soil
588 variability and the presence of a shallow groundwater table on the hydrological performance of
589 single infiltration trench. Statistical analysis of continuous long-term simulations of 9 different
590 scenarios was used to evaluate annual and single event runoff reduction from single infiltration
591 trenches. Overall results showed that infiltration trenches can reduce annual runoff; that if the soil
592 hydraulic conductivity is on the order of $1 \cdot 10^{-7}$ m/s or lower, infiltration trenches might not be a
593 good solution for handling urban runoff as they require large volumes (36-83 mm) for average
594 annual runoff reductions of 16-70 %; that it is important to include groundwater drainage in the
595 design of infiltration trenches; that a saturated thickness of the unconfined aquifer of less than a few
596 meters can significantly reduce the hydrological performance of infiltration trench; that the more
597 the infiltrated runoff volume, the more the groundwater mound will reduce the infiltration trench
598 performance. Results showed that the performance of infiltration trenches is affected by
599 groundwater when there is an unsaturated depth of less than 1.5-3 m in sandy loam, 6.5-8 m in silt
600 loam and 11-12 m in silty clay loam.

601 Moreover, this study suggests that infiltration trench should be designed with the aim of reducing
602 annual runoff and are less effective for single event peak and volume runoff.

603 Finally the results from the correction factor showed that there is an unsaturated depth below which
604 the infiltration trench performance is governed by the dissipation of the mound. This means that
605 when designing infiltration trenches very close to the groundwater table the groundwater dissipation
606 capacity should drive the design process. This suggests that infiltration trench design tools should
607 consider groundwater, especially in areas with shallow groundwater and that infiltration trench

608 design must be done cautiously when implementing infiltration systems with depth to groundwater
609 less than the threshold depths indicated for the different soil types.

610 **Acknowledgments**

611 The authors thank the Danish Council for Research that financed the present research through the
612 project BIV (Byer I Vandbalance/Cities in water balance).

613

614 **References**

- 615 Antia, D. D. J., 2008. Prediction of overland flow and seepage zones associated with the interaction
616 of multiple infiltration infiltration devices (cascading devices). *Hydrological Processes*
617 22(14): 2595-2614.
- 618 Bergman, M., Hedegaard, M.R., Petersen, M.F., Binning, P., Mark, O., Mikkelsen, P.S., 2011.
619 Evaluation of two stormwater infiltration trenches in central Copenhagen after 15 years of
620 operation. *Water Sci. Technol.* 63 (10), 2279–2286.
- 621 Bockhorn, B., Klint, K.E.S., Jensen, M.B., Møller, I., 2014. Using geological mapping tools to
622 improve the work efficiency of SUDS. 13th IAHR/IWA International Conference on Urban
623 Drainage. 7th-12th September, 2014. Malaysia.
- 624 Browne, D., Deletic, A., Mudd, G.M., Fletcher, T.D., 2008. A new saturated/unsaturated model for
625 stormwater infiltration systems. *Hydrological Processes* 22(25): 4838-4849.
- 626 Browne, D., Deletic, A., Mudd, G. M., Fletcher, T.D., 2012. A two-dimensional model of hydraulic
627 performance of stormwater infiltration systems. *Hydrological Processes*.
- 628 Campisano, A., Creaco, E., Modica, C., 2011. A simplified approach for the design of infiltration
629 trenches. *Water Science and Technology* 64: 6. 1362-1367.
- 630 Campisano, A., Modica C., 2015. Appropriate resolution timescale to evaluate water saving and
631 retention potential of rainwater harvesting for toilet flushing in single houses. *Journal of*
632 *Hydroinformatics* 17: 3. 331–346.
- 633 Carleton, G.B., 2010. Simulation of groundwater mounding beneath hypothetical stormwater
634 infiltration basins, U.S. Geological Survey. Scientific Investigations Report 2010-5102.
- 635 Carsel, R.F., Parrish, R.S., 1988. Developing joint probability distributions of soil water retention
636 characteristics. *Water Resources Research* 24(5): 755-769.
- 637 CIRIA. 2007. The SUDS manual (C697). CIRIA, Classic House, 174–180 Old Street, London,
638 EC1V 9BP, UK. ISBN 978-0-86017-697-8.

639 Dussaillant, A., Wu, C., Potter, K., 2004. Richards Equation Model of a Rain Garden. *Journal of*
640 *Hydrologic Engineering* 9(3): 219-225.

641 Elliott, A.H., Trowsdale S.A., 2007. A review of models for low impact urban stormwater drainage.
642 *Environmental Modelling & Software* 22(3): 394-405.

643 Elliott, A.H., Trowsdale S.A., Wadhwa, S., 2009. Effect of Aggregation of On-Site Storm-Water
644 Control Devices in an Urban Catchment Model. *Journal of Hydrologic Engineering* 14(9):
645 975-983.

646 Endreny, T., Collins, V., 2009. Implications of bioretention basin spatial arrangements on
647 stormwater recharge and groundwater mounding. *Ecological Engineering* 35(5): 670-677.

648 Fletcher, T.D., William, S., Hunt, W.F., Ashley, R., Butler, D., Scott, A., Trowsdale, S., Barraud, S.,
649 Semadeni-Davies, A., Bertrand-Krajewski, J.L., Mikkelsen, P.S., Rivard, G., Uhl, M.,
650 Dagenais, D., Viklander, M., 2014. SUDS, LID, BMPs, WSUD and more – The evolution
651 and application of terminology surrounding urban drainage. *URBAN WATER JOURNAL*:
652 1-18

653 Freni, G., Mannina, G., Viviani, G., 2009. Stormwater infiltration trenches: a conceptual modelling
654 approach. *Water Science & Technology*.

655 Göbel, P., Stubbe, H., Weinert, M., Zimmermann, J., Fach, S., Dierkes, C., Kories, H., Messer, J.,
656 Mertsch, V., Geiger, W.F., Coldewey, W.G., 2004. Near-natural stormwater management
657 and its effects on the water budget and groundwater surface in urban areas taking account of
658 the hydrogeological conditions. *J. Hydrol.* 299, 267–283.

659 Guo, C.Y., 1998. Surface-subsurface model for trench infiltration basins. *Journal of Water*
660 *Resources Planning and Management-Asce* 124(5): 280-284.

661 Helton, J. C. and F. J. Davis 2003. Latin hypercube sampling and the propagation of uncertainty in
662 analyses of complex systems. *Reliability Engineering & System Safety* 81(1): 23-69.

663 Hantush, M.S., 1967. Growth and decay of groundwater-mounds in response to uniform
664 percolation. *Water Resour. Res.* 3, 227–234.

665 Holman-Dodds, J.K., Bradley, A.A., Potter, K.W., 2003. Evaluation of Hydrologic Benefits of
 666 Infiltration Based Urban Storm Water Management. J. of the American Water Resources
 667 Association (JAWRA) 39(1):205–215.

668 Jeppesen, J., 2010. Quantitative Hydrological Effects of Urbanization and Stormwater Infiltration in
 669 Copenhagen, Denmark. PhD Thesis. Department of Earth Sciences, Aarhus University,
 670 Denmark.

671 Ku, H.F.H., Hagelin, N.W., Buxton, H.T., 1992. Effects of Urban Storm-Runoff Control on
 672 Ground-Water Recharge in Nassau County, New York. Ground water 30(4): 507-514.

673 Locatelli, L., Gabriel, S., Mark, O., Mikkelsen, P.S., Arnbjerg-Nielsen, K., Taylor, H., Bockhorn,
 674 B., Larsen, H., Kjølby, M.J., Steensen Blicher, A., Binning, P.J., 2015. Modelling the impact
 675 of retention–detention units on sewer surcharge and peak and annual runoff reduction. Water
 676 science and technology. 98–903.

677 Machusick, M., Welker, A., Traver, R., 2011. Groundwater mounding at a stormwater infiltration
 678 BMP. J. Irrigat. Drainage 137, 154–160.

679 Madsen H., Arnbjerg-Nielsen K., Mikkelsen P.S., 2009. Update of regional intensity-duration-
 680 frequency curves in Denmark: Tendency towards increased storm intensities. Atmospheric
 681 Research, 92(3), 343-349.

682 Maimone, M., O'Rourke, D.E., Knighton, J.O., Thomas, C.P., 2011. Potential Impacts of Extensive
 683 stormwater Infiltration in Philadelphia. Environmental Engineer.

684 Malaguerra, F., Albrechtsen, H.J., Thorling, L., Binning, P.J., 2012. Pesticides in water supply wells
 685 in Zealand, Denmark: a statistical analysis. Sci Total Environ. 2012;414:433-44.

686 Manglik, A., Rai, S.N., Singh, V.S., 2004. Modelling of aquifer response to time varying recharge
 687 and pumping from multiple basins and wells. J. Hydrol. 292, 23–29.

688 Mikkelsen, P.S., Weyer, G., Berry, C., Walden, Y., Colandini, V., Poulsen, S., Grotehusmann,
 689 D.A., Rohlfing, R., 1994. Pollution from urban stormwater infiltration. Water. Sci. Technol.
 690 29 (1–2), 293–302.

691 Peters, C., Keller, S., Sieker, H., Jekel, M., 2007. Potentials of real time control, stormwater
 692 infiltration and urine separation to minimize river impacts: dynamic long term simulation of
 693 sewer network, pumping stations, pressure pipes and waste water treatment plant. *Water Sci.*
 694 *Technol.* 56 (10), 1–10.

695 Petersen, C.O.R., Jacobsen, P., Mikkelsen, P.S., 1994. Design of stormwater infiltration for
 696 reduction of combined sewer overflow (CSO). *Water Sci. Technol.* 30 (1), 53–61.

697 Petersen, C.R., Jacobsen, P., Mikkelsen, P.S., 1995. Nedsivning af regnvand-dimensionering.
 698 (Stormwater infiltration-design methods). Spildevandskomiteen, Skrift, 25.

699 Rao, N.H., Sarma, P.B.S., 1983. Recharge to finite aquifer from strip basins. *J. Hydrol.* 66, 245–
 700 252.

701 Revitt, M., Ellis, B., Scholes, L., 2003. Report 5.1 Review of the use of stormwater BMPs in
 702 Europe. In: Project under EU RTD 5th Framework Programme. WP5/T5.1/D5.1. Middlesex
 703 University.

704 Roldin, M., Fryd, O., Jeppesen, J., Mark, O., Binning, P.J., Mikkelsen, P.S., Jensen, M.B. 2012a.
 705 Modelling the impact of soakaway retrofits on combined sewage overflows in a 3 Km(2)
 706 urban catchment in Copenhagen, Denmark. *Journal of Hydrology* 452, 64–75.

707 Roldin, M., Mark, O., Kuczera, G., Mikkelsen, P.S., Binning, P.J. 2012b. Representing soakaways
 708 in a physically distributed urban drainage model – upscaling individual allotments to an
 709 aggregated scale. *Journal of Hydrology* 414–415, 530–538.

710 Roldin, M., Locatelli, L., Mark, O., Mikkelsen, P.S., Binning, P.J., 2013. A simplified model of
 711 soakaway infiltration interaction with a shallow groundwater table. *Journal of Hydrology*
 712 497(0): 165-175.

713 Sin G., Gernaey K.V., Neumann, M.B., van Loosdrecht, M.C.M., Gujer, W., 2010. Global
 714 sensitivity analysis in wastewater treatment plant model applications: prioritizing sources of
 715 uncertainty. *Water research*, 45,639-651.

716 Thompson, A., Nimmer, M., Misra, D., 2010. Effects of variations in hydrogeological parameters
 717 on water-table mounding in sandy loam and loamy sand soils beneath stormwater infiltration
 718 basins. *Hydrogeology Journal* 18(2): 501-508.

719 Van Genuchten, M.T., 1980. A closed-form equation for predicting the hydraulic conductivity of
 720 unsaturated soils. *Soil Sci. Soc. Am. J.* 44, 892–898.

721 Vrugt, J.A., ter Braak, C.J.F., Diks C.G.H, Higdon, D., Robinson, B.A., Hyman, J.M., 2009.
 722 Accelerating Markov chain Monte Carlo simulation by differential evolution with self-
 723 adaptive randomized subspace sampling, *International Journal of Nonlinear Sciences and*
 724 *Numerical Simulation*, 10(3), 273-290.

725 Warnars, E., Larsen, A.V., Jacobsen, P., Mikkelsen, P.S., 1999. Hydrologic behaviour of
 726 stormwater infiltration trenches in a central urban area during 2 3/4 years of operation.
 727 *Water Sci. Technol.* 39 (2), 217–224.

728 Weibull, W., 1939. A statistical theory of strength of materials. *Ing. Vetensk. Akad Handl.* 151, 1–
 729 45.

730 Wong, T.H.F., Brown R.R., 2009. The water sensitive city: principles for practice. *Water Science*
 731 *and Technology* 60(3): 673-682

732 Xiao, Q., McPherson, E.G., Simpson, J.R., Ustin, S.L., 2007. Hydrologic processes at the urban
 733 residential scale. *Hydrol. Process.* 21, 2174–2188.

734 Zimmermann, H.-J., 2000. An application oriented view of modeling uncertainty. *European Journal*
 735 *of Operational Research*, 122:190-198.

736

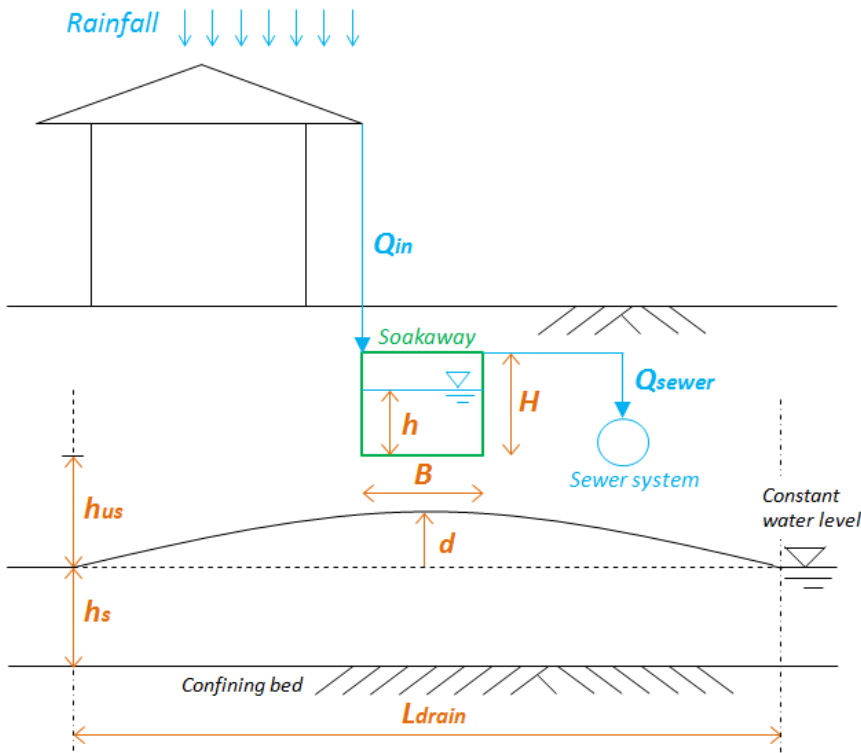


Figure 1. Sketch of the infiltration trench and the groundwater mound system.

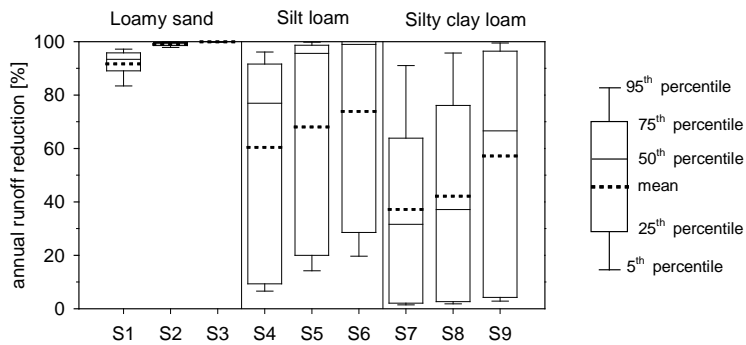


Figure 2. Annual stormwater runoff reduction for the 9 scenarios from the Simple Model (SM). The uncertainty bounds of annual runoff reduction include the effect of inter-annual variation and variability of model input parameters, particularly K .

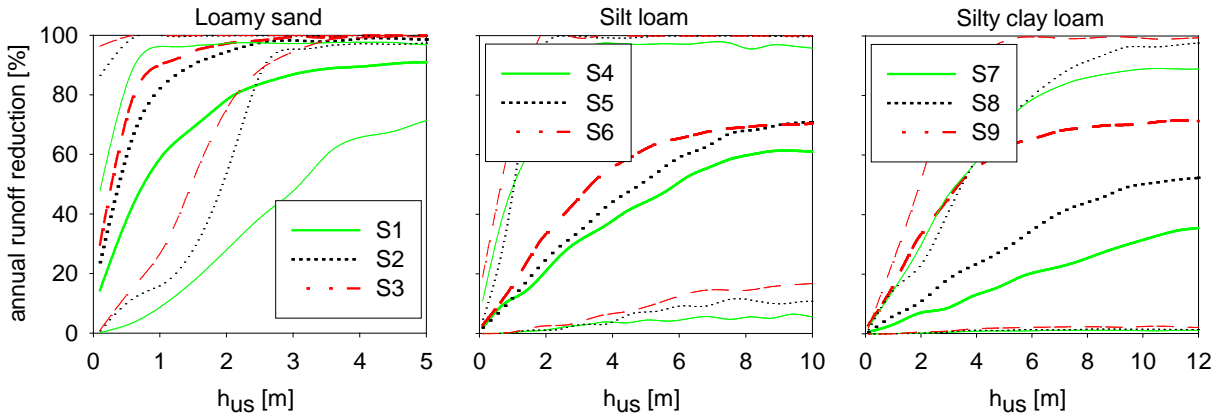


Figure 3. Annual stormwater runoff reduction as a function of the unsaturated depth. The thicker lines represent the mean, whereas the thinner lines show the 5th and 95th percentiles. The uncertainty bounds of annual runoff reduction include the effect of inter-annual variation and variability of model input parameters, particularly K.


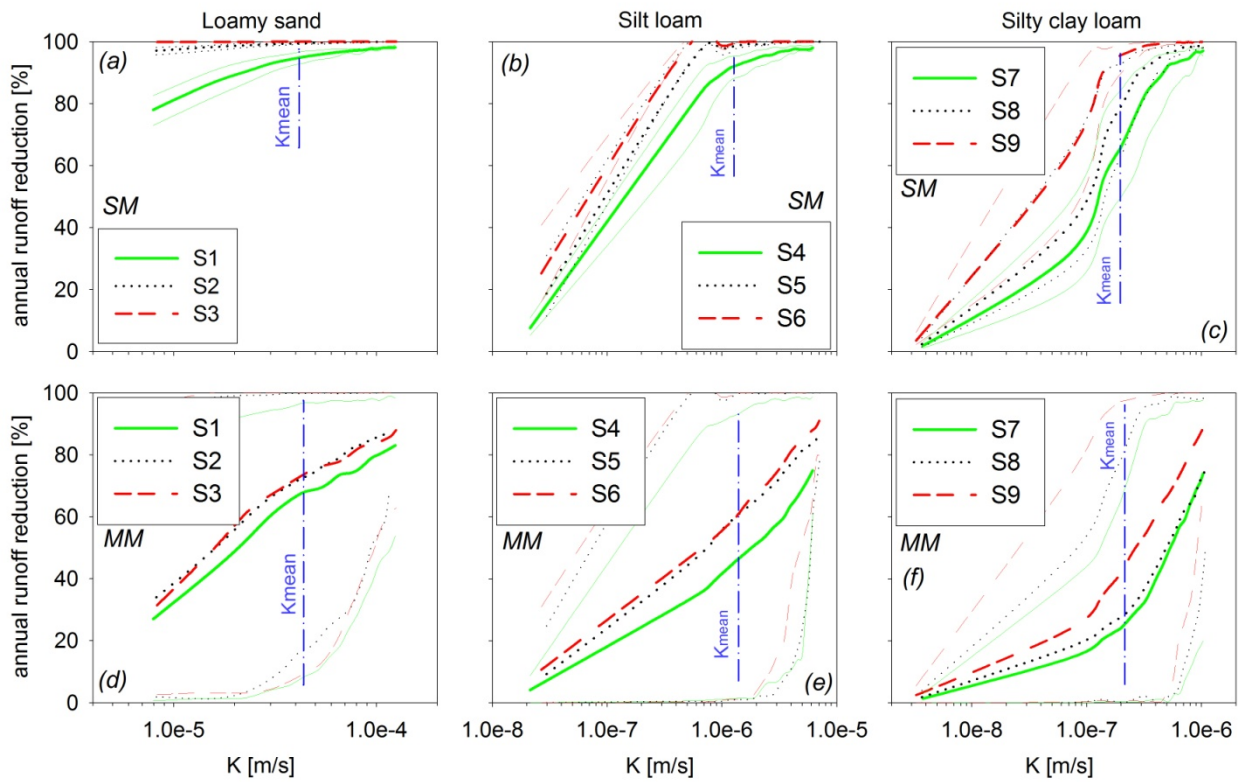



Figure 4. Annual stormwater runoff reduction as a function of the hydraulic conductivity for the 2 models (SM and MM). The thicker lines represent the mean, whereas the thinner lines show

753 the 5th and 95th percentiles. The uncertainty bounds of annual runoff reduction include the
754 effect of inter-annual variation and variability of model input parameters, particularly h_{us} .
755

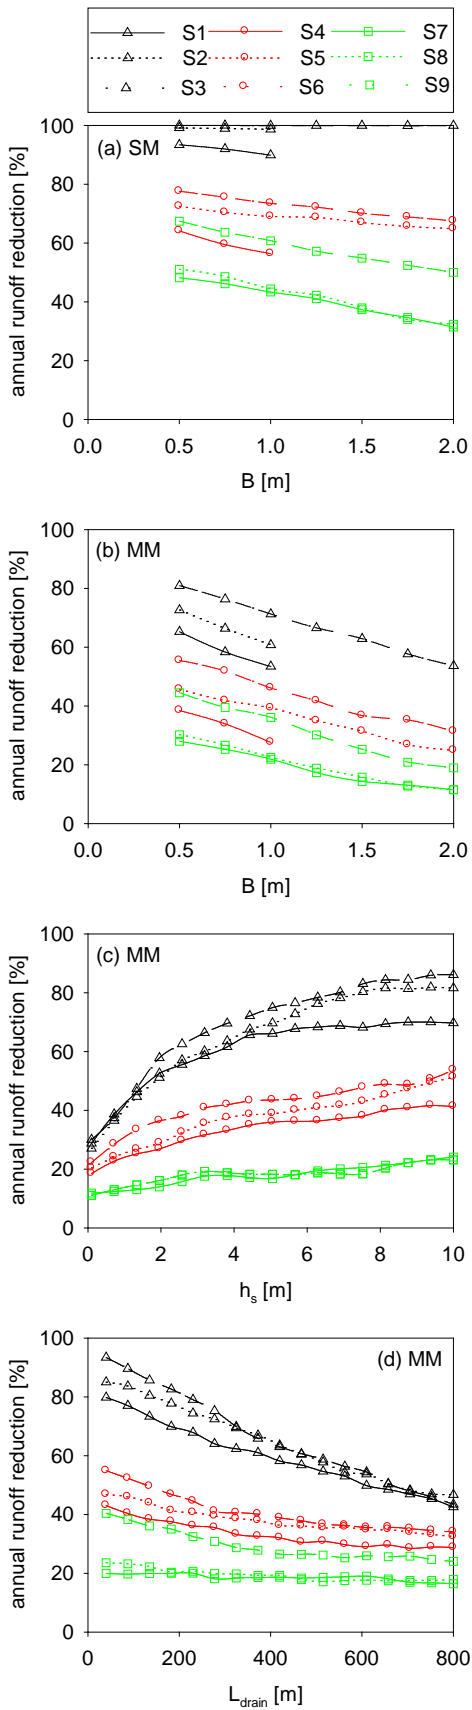

756

757 **Figure 5. Annual stormwater runoff reductions as a function of B , h_s and L_{drain} . Simple Model**
 758 **(SM) and Model with Mounding (MM).**

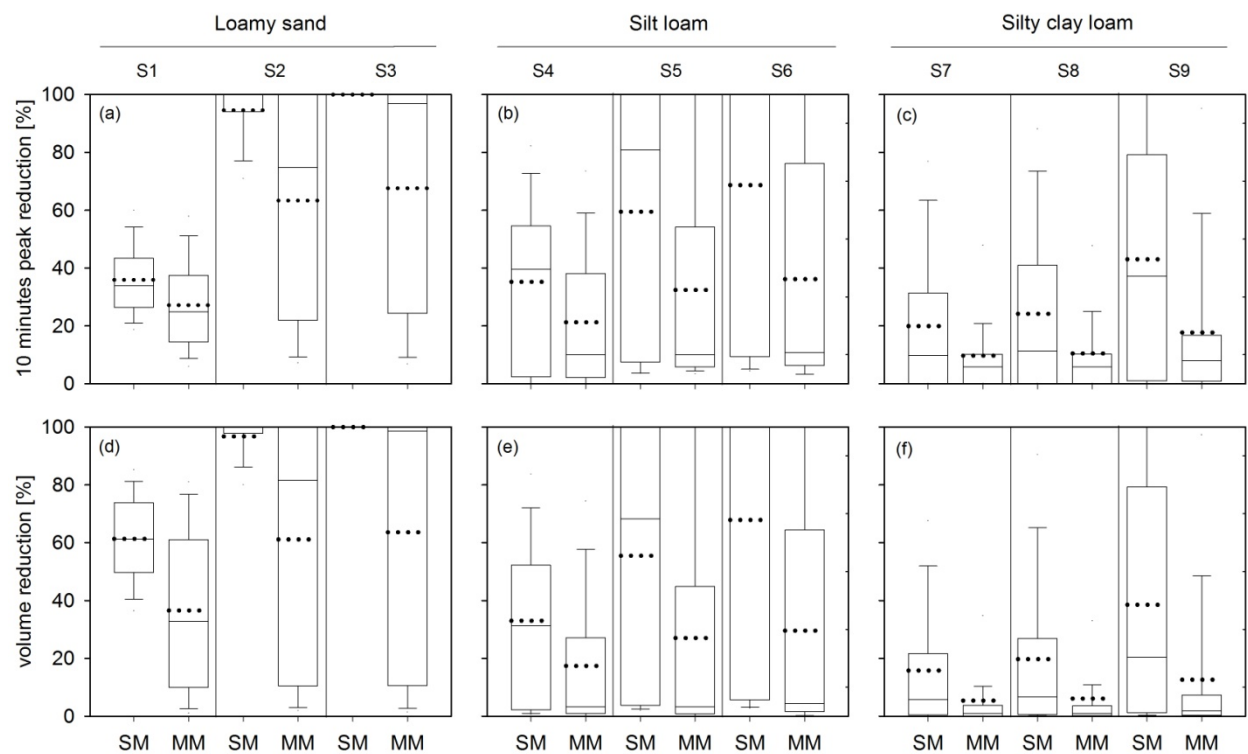

760

761

762

763

764

Figure 6. Single event peak and volume runoff reduction for rain events of 0.5-1 year return period. Simple Model (*SM*) and Model with Mounding (*MM*). The uncertainties in the *SM* are mostly due to *K* variability, whereas in the *MM* they are due to *K* and *h_{us}* variability.

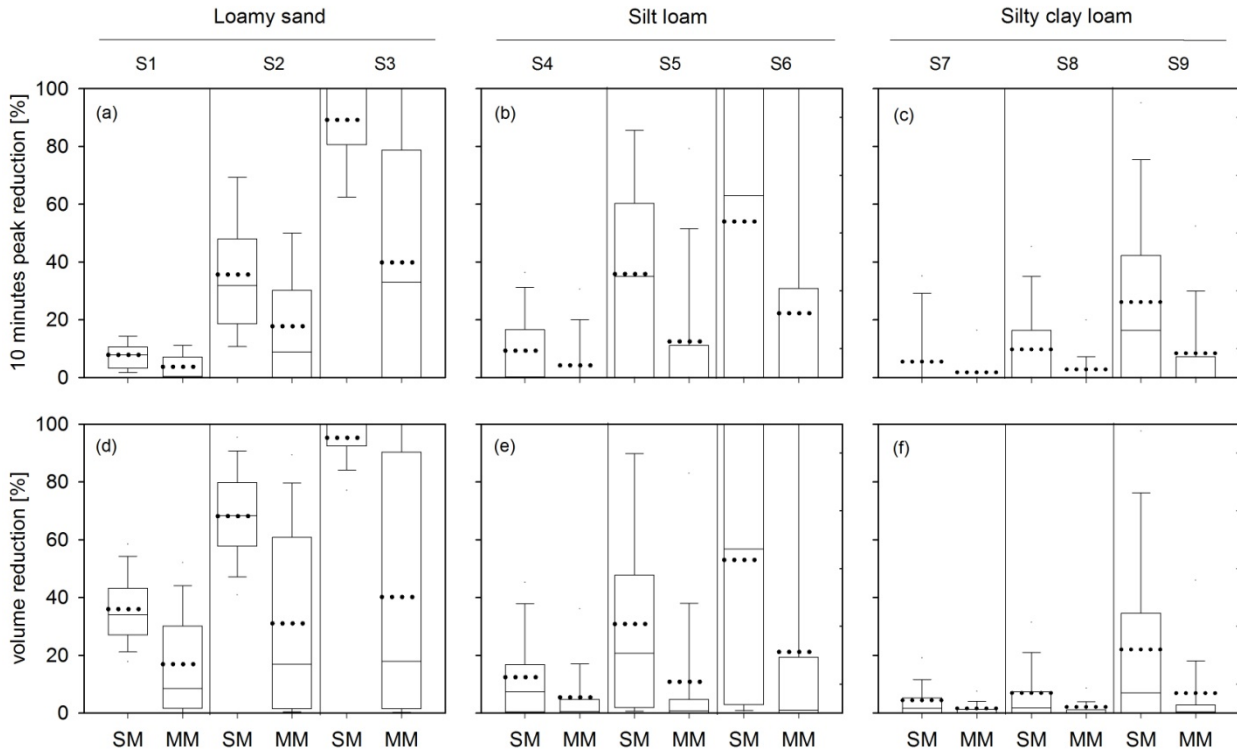


Figure 7. Single event peak and volume runoff reduction for rain events of 5-10 year return period. Simple Model (SM) and Model with Mounding (MM). The uncertainties in the SM are mostly due to K variability, whereas in the MM they are due to K and h_{us} variability.


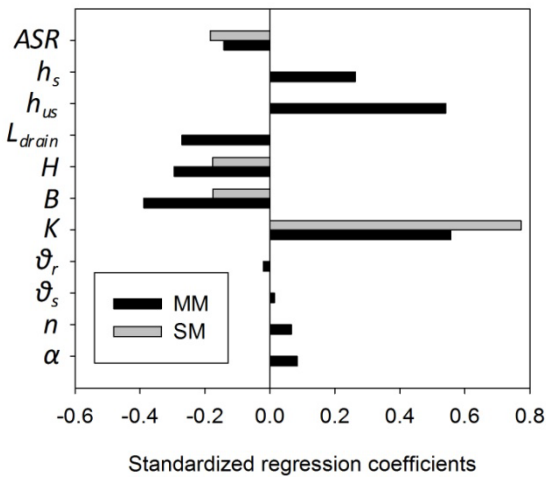


Figure 8. Standardized regression coefficients illustrating the results of the sensitivity analysis for Scenario 5, based on input defined in Table 3.

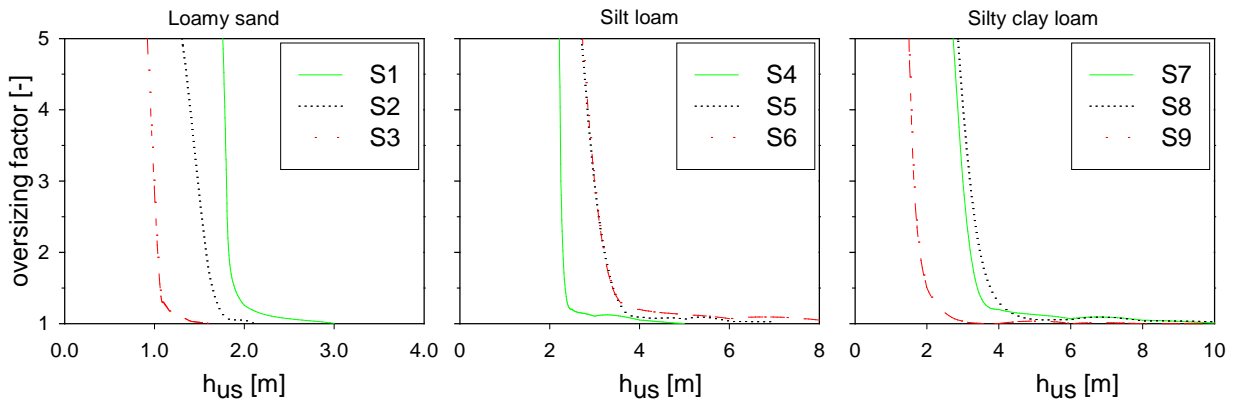

774

775 **Figure 9. Correction factor as a function of the unsaturated depth.**

776

777

Table 1. Model input parameters

	Parameter	Description	Value	Unit	Simple Model (SM)	Model with Mounding (MM)
Soil parameters	α	Van Genuchten parameter		m^{-1}		X
	n	Van Genuchten parameter		-		X
	m	Van Genuchten parameter	$1-1/n$	-		
	θ_s	Saturated moisture content		-		X
	θ_r	Residual moisture content		-		X
	K	Saturated hydraulic conductivity		m/s	X	X
Infiltration trench parameters	L	Length of the infiltration trench		m		
	B	Width of the infiltration trench		m	X	X
	H	Height of the infiltration trench		m	X	X
	ϕ	Porosity of the filling material		-		
	ASR (Area/ Storage Ratio)	'Connected impervious area' / 'Infiltration trench volume'		m^2/m^3	X	X
Unsaturated and saturated zone	h_{us}	Thickness of the unsaturated zone		m		X
	h_s	Thickness of the saturated zone		m		X
Draining distance	L_{drain}	Length of the model domain		m		X

Table 2. Model scenarios

Scenario	Description	Infiltration trench design			B ** [m]	H ** [m]	h_{us} ** [m]	h_s ** [m]	L_{drain} ** [m]
		Design return period [years]*	Area/Storage Ratio [m^2/m^3]	Storage depth [mm]					
S1	Small infiltration trench in loamy sand	0.1	200-230	4-5	0.5-1	0.5-1	0-5	1-10	40-800
S2	Medium infiltration trench in loamy sand	1	75-90	11-13	0.5-1	0.5-1	0-5	1-10	40-800
S3	Large infiltration trench in loamy sand	10	35-45	22-29	0.5-2	0.5-1	0-5	1-10	40-800
S4	Small infiltration trench in silt loam	0.1	55-70	14-18	0.5-1	0.5-1	0-10	1-10	40-800
S5	Medium infiltration trench in silt loam	1	20-28	36-50	0.5-2	1	0-10	1-10	40-800
S6	Large infiltration trench in silt loam	5	14-18	56-71	0.5-2	1	0-10	1-10	40-800
S7	Small infiltration trench in silty clay loam	0.1	30-40	25-33	0.5-2	0.5-1	0-15	1-10	40-800
S8	Medium infiltration trench in silty clay loam	0.2	20-28	36-50	0.5-2	1	0-15	1-10	40-800

S9	Large infiltration trench in silty clay loam	1	12-15	67-83	0.5-2	1	0-15	1-10	40-800
----	--	---	-------	-------	-------	---	------	------	--------

*According to Danish standards (Petersen et al., 1995)
 ** Uniform distribution

Table 3. Soil input parameters

	Loamy sand		Silt loam		Silty clay loam	
	<i>Mean</i>	<i>STD</i>	<i>Mean</i>	<i>STD</i>	<i>Mean</i>	<i>STD</i>
$\alpha [m^{-1}]$ *	12.4	4.3	2.0	1.2	1.0	0.6
n *	2.28	0.27	1.41	0.12	1.23	0.06
θ_s *	0.41	0.09	0.45	0.08	0.43	0.07
θ_r *	0.057	0.015	0.067	0.015	0.089	0.009
$K [m/s]$ **	$4.05 \cdot 10^{-5}$	$3.16 \cdot 10^{-5}$	$1.25 \cdot 10^{-6}$	$3.42 \cdot 10^{-6}$	$1.94 \cdot 10^{-7}$	$5.3 \cdot 10^{-7}$

* Normal distribution
 ** Log-Normal distribution (non-transformed *Mean* and *STD*)

Tabel 3. Threshold value of unsaturated depth for the model scenarios.

Soil type	Scenario	Infiltration trench design return period [y]	Threshold unsaturated depth h_{us} [m]
Loamy sand	S1	0.1	3
	S2	1	2
	S3	10	1.5
	S4	0.1	8
Silt loam	S5	1	8
	S6	5	6.5
	S7	0.1	12
Silty clay loam	S8	0.2	12
	S9	1	11