DTU Library

Functional Relationship Between Primary and Secondary Delays on Railway Lines

Harrod, Steven; Cerreto, Fabrizio; Nielsen, Otto Anker

[Link back to DTU Orbit](#)

Functional Relationship Between Primary and Secondary Delays on Railway Lines

INFORMS 2016, Nashville

Dr. Steven Harrod

Fabrizio Cerreto, Prof. Otto Anker Nielsen

Technical University of Denmark

DTU Management Engineering
Institut for Systemer, Produktion og Ledelse

Polynomial Aggregate Delay Function

- Management question
- Problem definition
- Formulation
- Some fun graphical results
- Conclusions recommend general "rule of thumb" timetable guidelines

Strategic Design of Timetable

- Goals
  - Provide service, capacity
  - Minimize travel time
  - Promise punctuality
- Controls
  - Frequency of service
  - Timetable "slack"
    - Extra train scheduled time
    - Extra separation between adjacent trains

40 Helsingør - København H - Malmö C
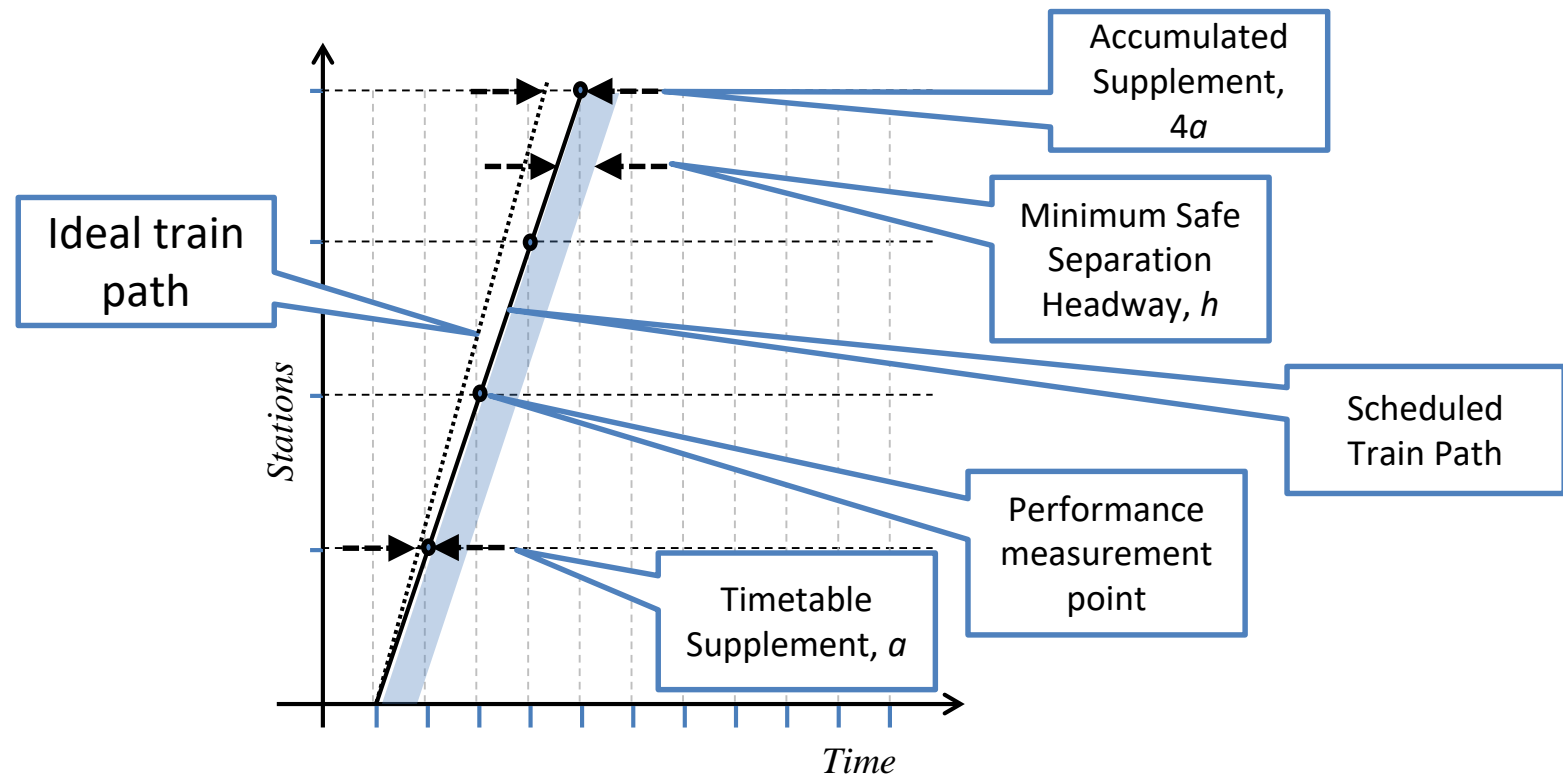Gyldig 8. august 2016 - 10. december 2016

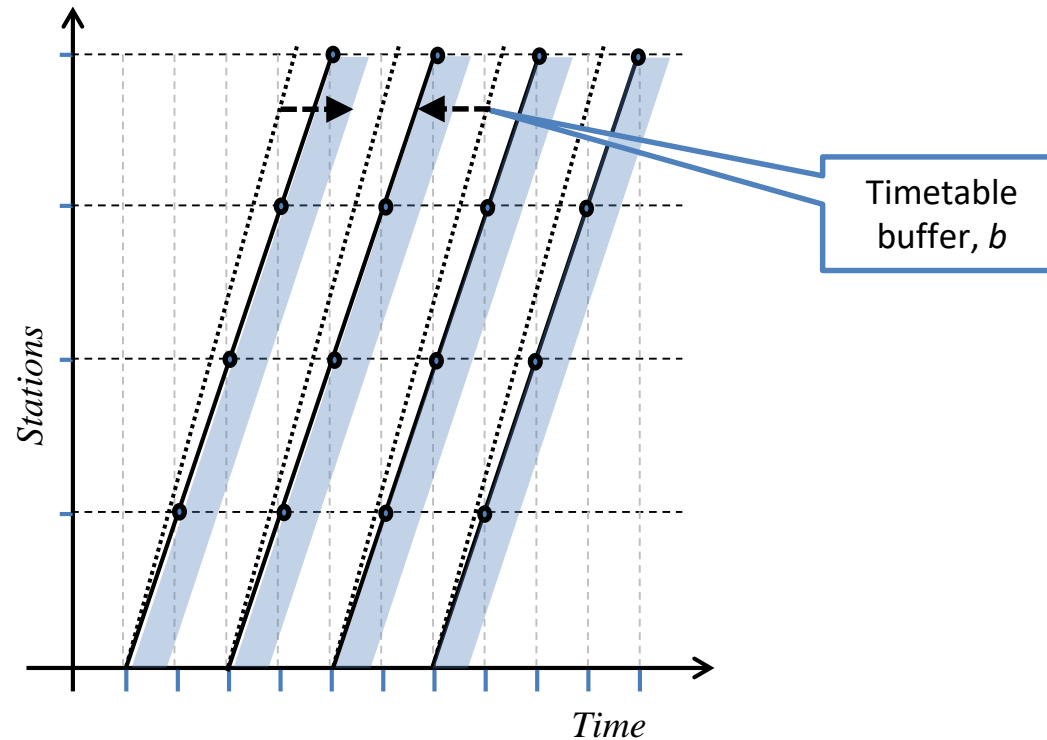| Køredage			①-⑤	①-⑤		
Helsingør	🚻	7.45	7.52	8.02	🚻	8.05
Snekkersten		7.49	7.57	8.06		8.09
Espergærde		7.52	8.00	8.09		8.12
Humlebæk	🚻	7.56	8.04	8.12	🚻	8.16
Nivå		8.00		8.16		8.20
Kokkedal		8.03	8.11	8.20		8.23
Rungsted Kyst		8.07	8.15			8.27
Vedbæk		8.11				8.31
Skodsborg		8.14				8.34
Klampenborg		8.19				8.39
Hellerup		8.24		8.35		8.44
Østerport		8.30	8.33	8.41		8.50
Nørreport		8.33	8.36	8.44		8.53
København H	o	8.37	8.40	8.48		8.57
København H		8.40				9.00
Ørestad		8.46				9.06
Tårnby		8.49				9.09
CPH Lufthavn ✈ ◆	o	8.57				9.17
CPH Lufthavn ✈					9.06	
Hyllie	o				9.18	
Hyllie					9.28	
Triangeln					9.31	
Malmö C	o				9.35	
Tognummer		1826	4428	2028	29728	1828

Key Performance Measure: Aggregate Delay

- The timetable is a system
- Punctuality is a systemwide measure
- Measure delayed passenger minutes
- Flawed but convenient equivalent
  - Measure train delays at each station
  - Accuracy depends on homogenous passenger flow at all stations
  - Do not measure train delays at non stopping locations

System Definition, Single Train

Ideal train path

Accumulated Supplement, 4*a*

Minimum Safe Separation Headway, *h*

Scheduled Train Path

Performance measurement point

Timetable Supplement, *a*

Stations

Time

System Definition, Multiple Trains

Timetable buffer, *b*

Stations

Time

Impact of a Primary Delay

Recovery Train Path

Original schedule

Primary Delay, p

$d=p-(s-1)a-(i-1)b$
$d=p-(2-1)a-(2-1)b$

Stations

Time

Train 1
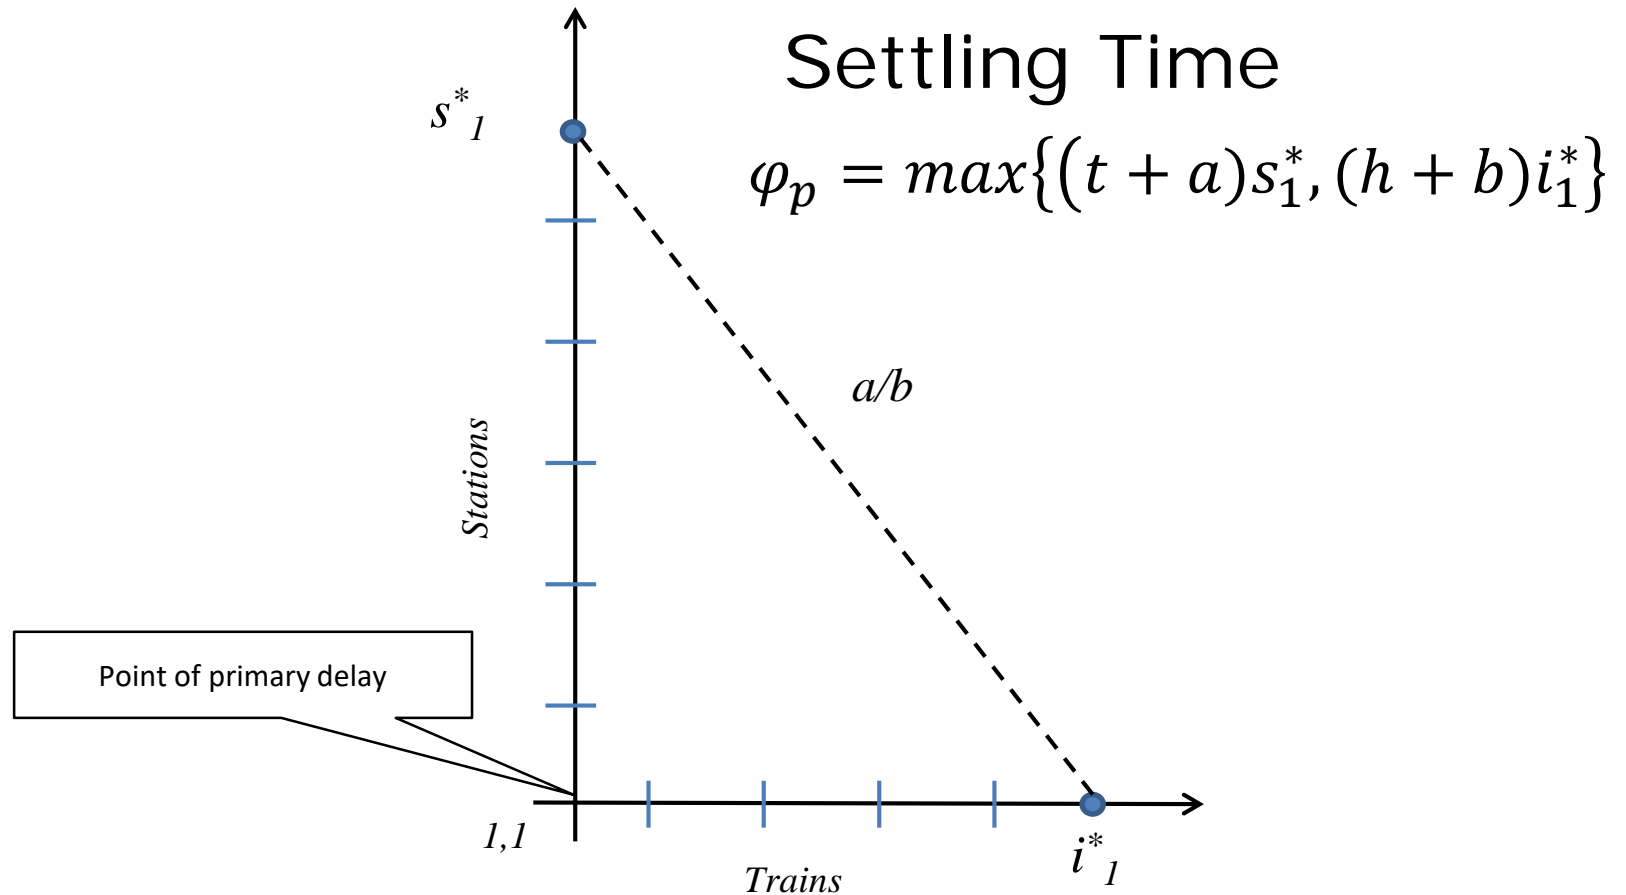
Train 2

Train 3

Train 4
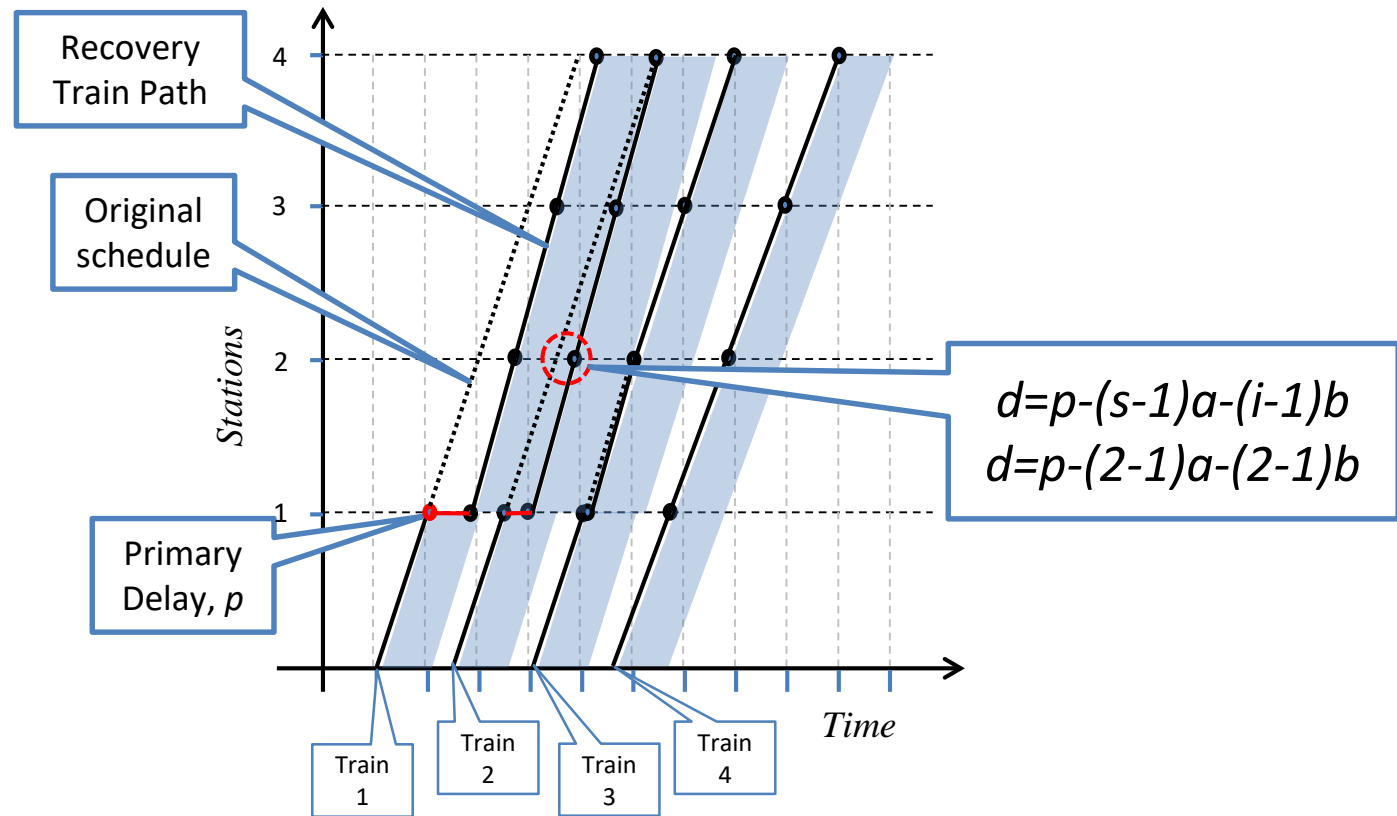
Derivation, Bounds of Disruption

$$\Gamma = \sum_{\substack{i \in R \mid d_{i,s} \geq \delta \\ s \in S}} d_{i,s}$$

Solve for: $d_{i,s} \geq \delta$

$$s_i^* = \left\lfloor \left| \frac{p + b - \delta}{a} - i\frac{b}{a} \right| + 1 \,\middle|\, p \geq a + \delta \right.$$

$$i_s^* = \left\lfloor \left| \frac{p + a - \delta}{b} - s\frac{a}{b} \right| + 1 \,\middle|\, p \geq b + \delta \right.$$

Recovery Region

Settling Time

$$\varphi_p = max\{(t+a)s_1^*, (h+b)i_1^*\}$$

$s^*{}_1$

a/b

Stations

Point of primary delay

1,1

Trains
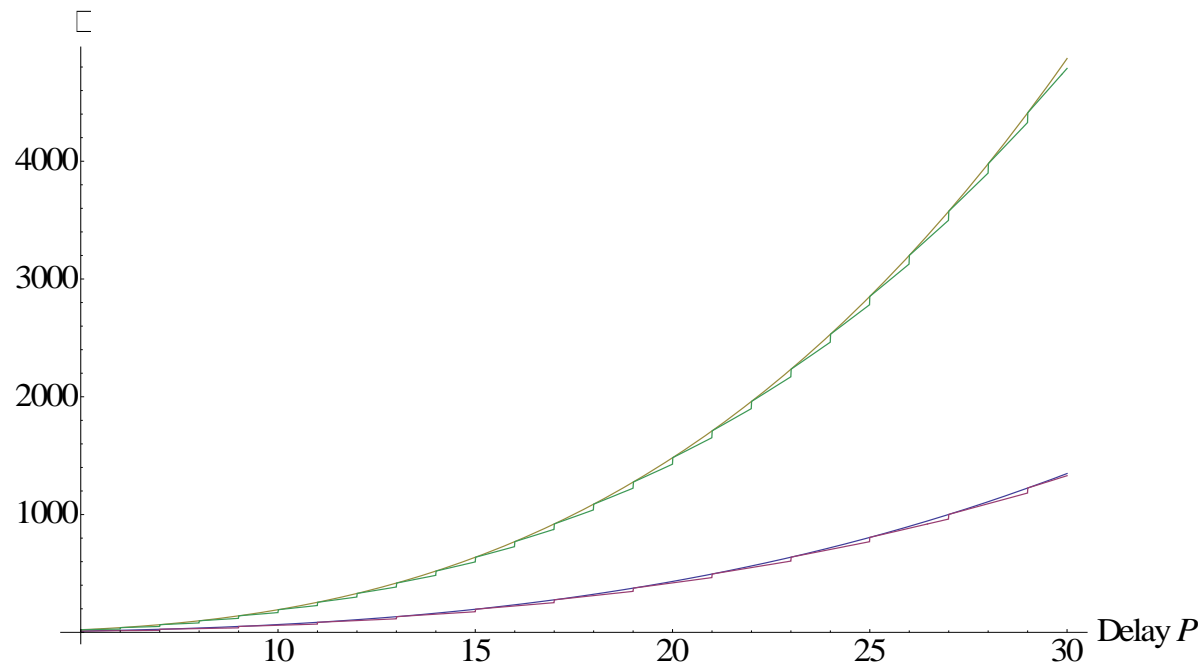
$i^*{}_1$

Symmetric System, c=a=b

$$s_i^* = \left\lfloor \left| \frac{p - \delta}{c} \right| \right\rfloor - i + 2 \mid p \geq c + \delta$$

$$i_s^* = \left\lfloor \left| \frac{p - \delta}{c} \right| \right\rfloor - s + 2 \mid p \geq c + \delta$$
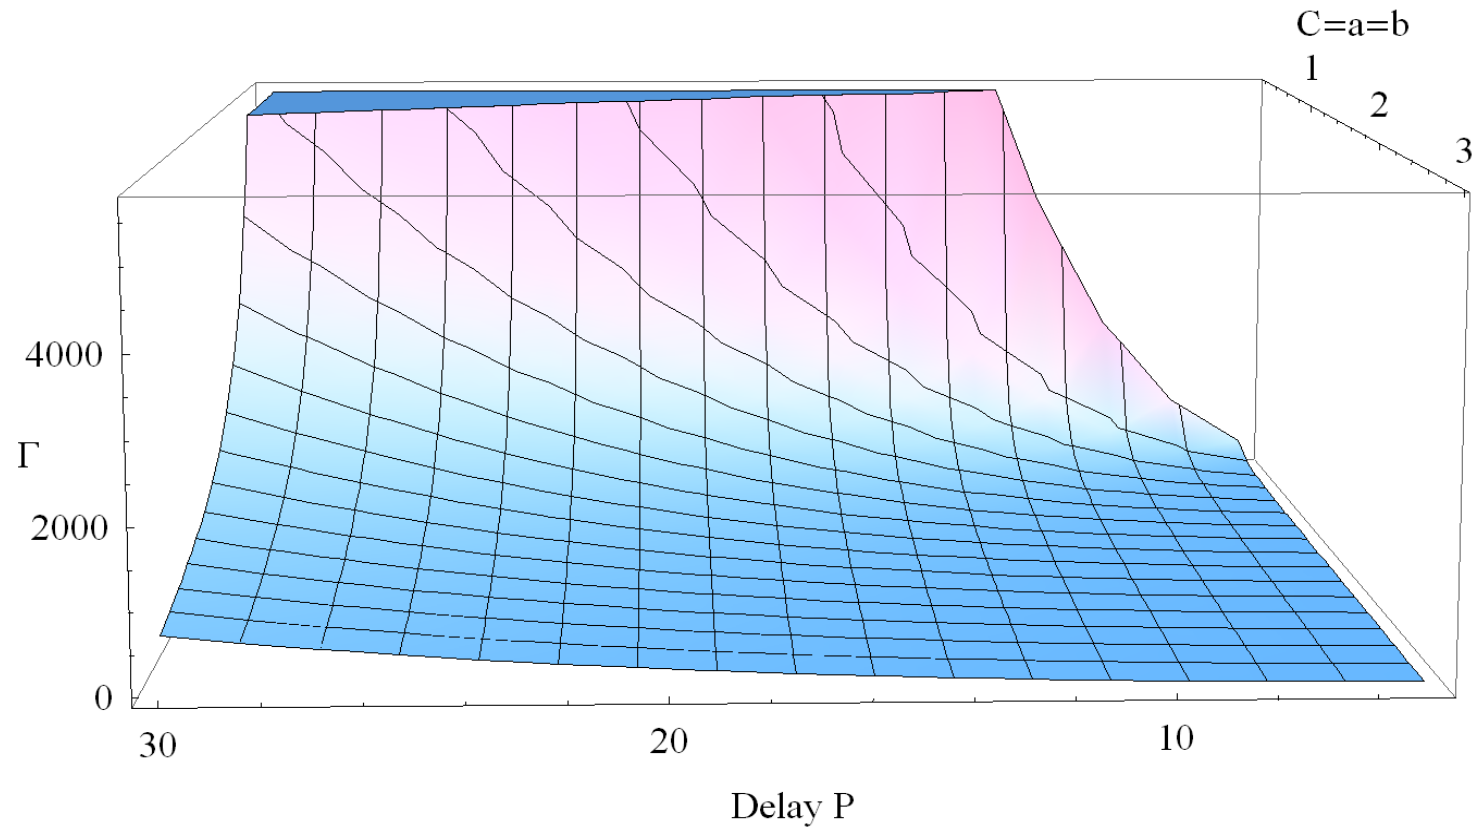
$$\Gamma_s = \sum_{\substack{i \in \left\{ 1,2,\ldots, \left\lfloor \left| \frac{p-\delta}{c} \right| \right\rfloor - s + 2 \right\} \\ s \in \left\{ 1,2,\ldots \left\lfloor \left| \frac{p-\delta}{c} \right| \right\rfloor + 1 \right\}}} p + 2c - c(s + i)$$

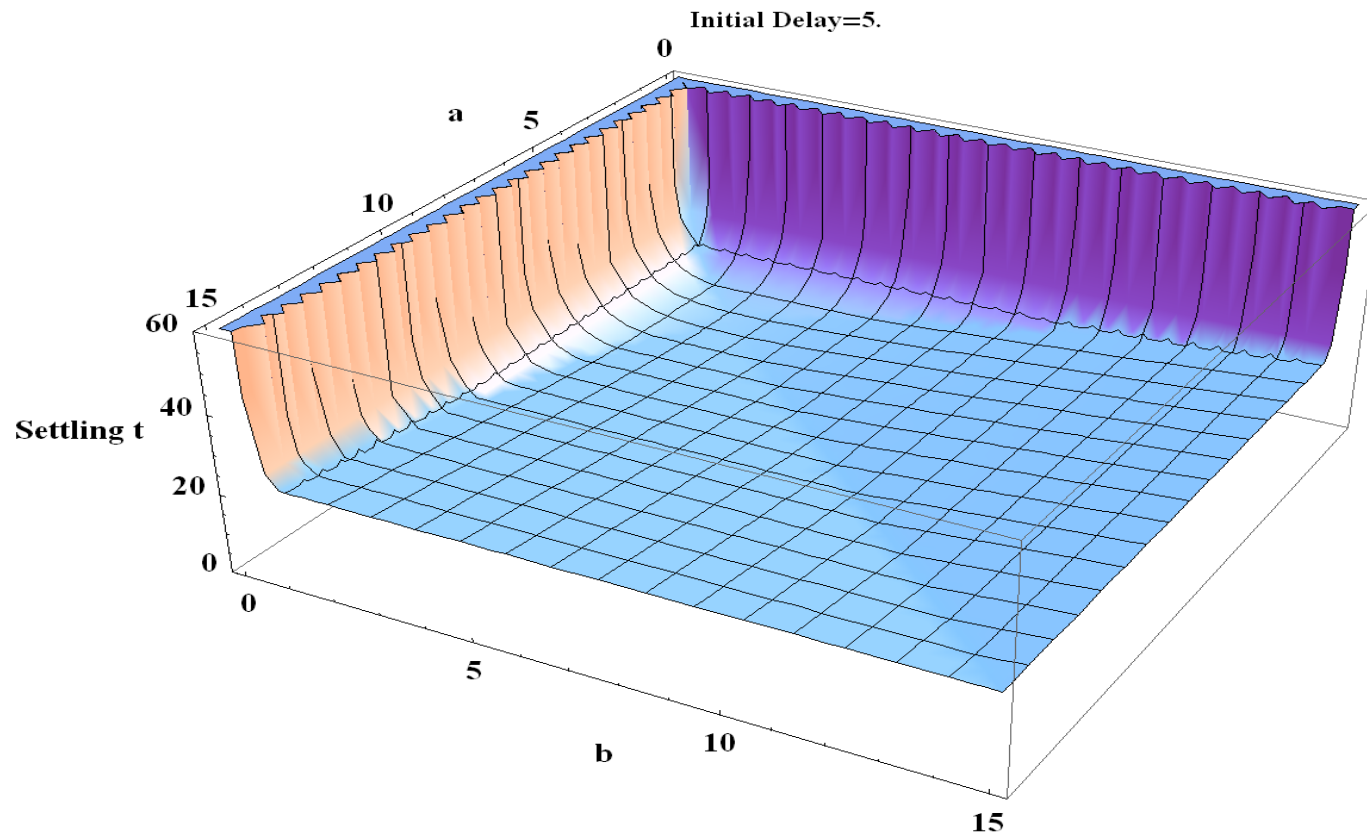# Relaxed Floor Generates Polynomial Cumulative Delay

$$\Gamma_s = \frac{p^3}{6c^2} + \frac{p^2}{2c} + \frac{(2c^2 + 3c\delta - 3\delta^2)p}{6c^2} + \frac{4c^2\delta - 6c\delta^2 + 2\delta^3}{6c^2}$$
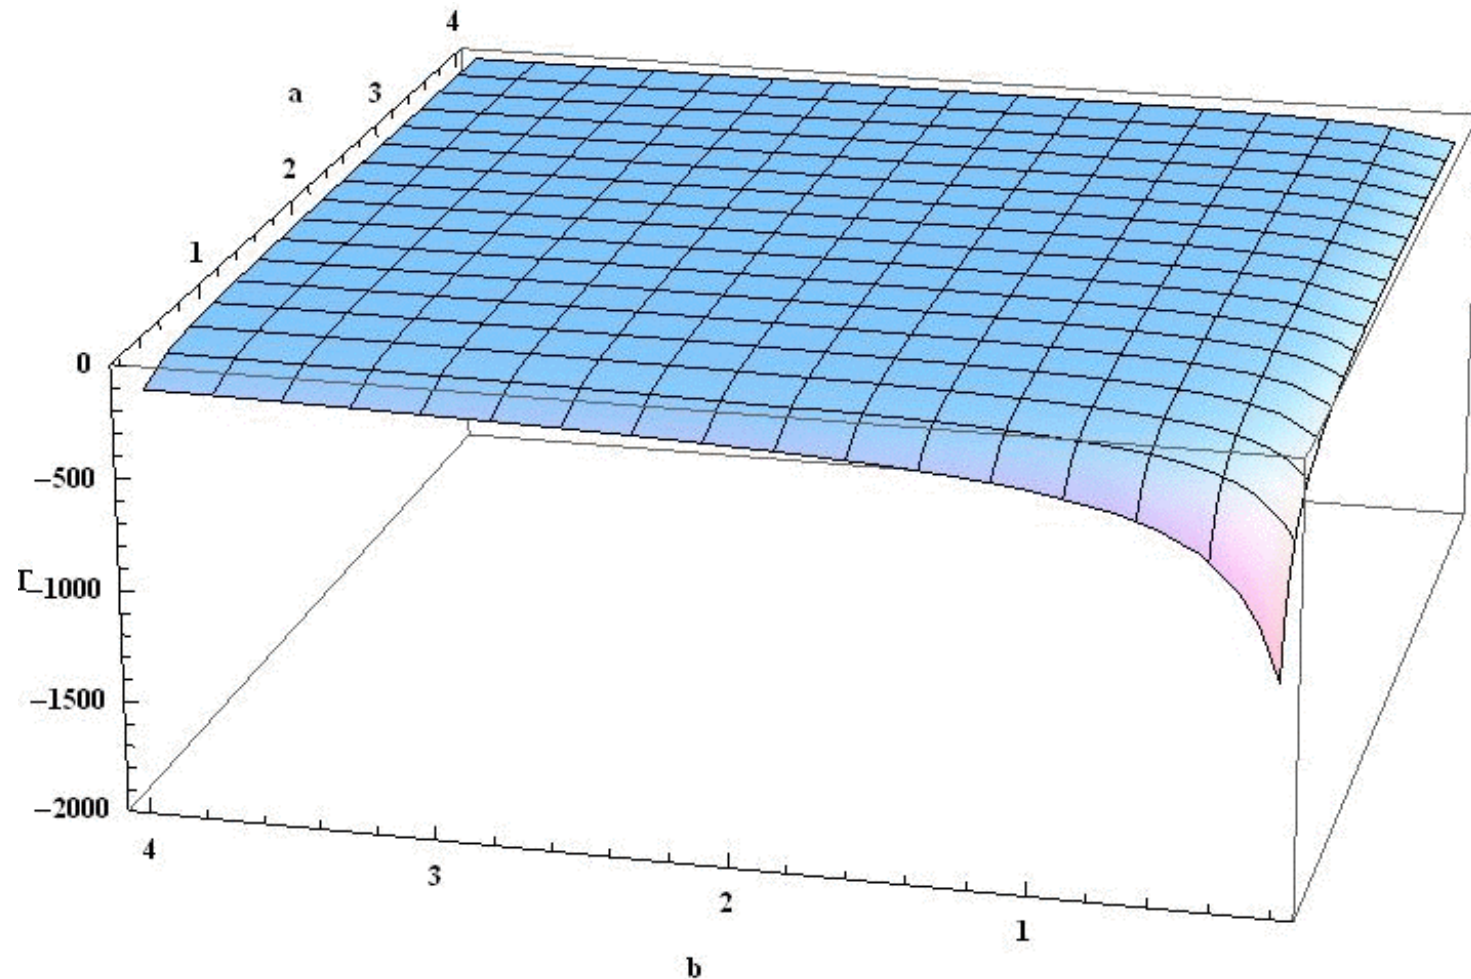
Visualizing the Polynomial

DTU Management Engineering, Technical University of Denmark

Settling Time Function φ

Figure 3-4: Contour of settling time with t=5, h=5, δ=3 and p=5.

DTU Management Engineering, Technical University of Denmark

Generic Polynomial, p: {5, 20}

Conclusions

- Cumulative train delay at stations is a key performance measure

- Polynomial function is a practical estimate of system delay

- Timetable supplement and timetable buffer should be equal

- Decreasing marginal benefit of increasing supplement/buffer

Tak for i dag!

DTU Management Engineering, Technical University of Denmark