



Free and immobilized biocatalysts for removing micropollutants from water and wastewater: Recent progress and challenges

Zdarta, Jakub; Jesionowski, Teofil; Pinelo, Manuel; Meyer, Anne S.; Iqbal, Hafiz M. N.; Bilal, Muhammad; Nguyen, Luong N; Nghiem, Long D

Published in:
Bioresource Technology

Link to article, DOI:
[10.1016/j.biortech.2021.126201](https://doi.org/10.1016/j.biortech.2021.126201)

Publication date:
2022

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Zdarta, J., Jesionowski, T., Pinelo, M., Meyer, A. S., Iqbal, H. M. N., Bilal, M., Nguyen, L. N., & Nghiem, L. D. (2022). Free and immobilized biocatalysts for removing micropollutants from water and wastewater: Recent progress and challenges. *Bioresource Technology*, 344(Part B), Article 126201. <https://doi.org/10.1016/j.biortech.2021.126201>

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.



Review

Free and immobilized biocatalysts for removing micropollutants from water and wastewater: Recent progress and challenges

Jakub Zdarta^{a,*}, Teofil Jesionowski^a, Manuel Pinelo^b, Anne S. Meyer^c, Hafiz M.N. Iqbal^d, Muhammad Bilal^e, Luong N. Nguyen^f, Long D. Nghiem^f

^a Institute of Chemical Technology and Engineering, Faculty of Chemical Technology, Poznan University of Technology, Berdychowo, PL-60965 Poznan, Poland

^b Process and Systems Engineering Centre, Department of Chemical and Biochemical Engineering, Technical University of Denmark, Soltofts Plads, DK-2800 Kongens Lyngby, Denmark

^c Section for Protein Chemistry and Enzyme Technology, Department of Biotechnology and Biomedicine, Technical University of Denmark, Soltofts Plads, DK-2800 Kongens Lyngby, Denmark

^d Tecnológico de Monterrey, School of Engineering and Sciences, Monterrey 64849, Mexico

^e School of Life Science and Food Engineering, Huaiyin Institute of Technology, Huaian 223003, China


^f Centre for Technology in Water and Wastewater, School of Civil and Environmental Engineering, University of Technology Sydney, NSW 2007, Australia



HIGHLIGHTS

- Micropollutant degradation by oxidoreductase enzymes is reviewed.
- Free and immobilized enzymes show a great potential for real wastewater treatment.
- Wastewater matrix constituents affect enzymatic biodegradation efficiency.
- Enzymatic membrane reactors facilitate operationability and reusability of enzymes.
- Further research is necessary to transfer enzymatic treatment into larger scale.

GRAPHICAL ABSTRACT

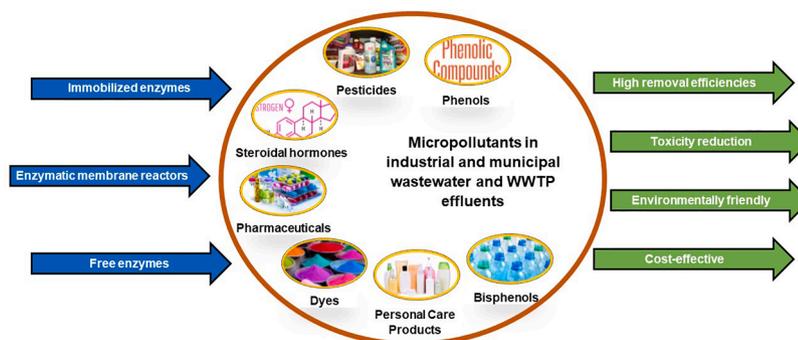

ARTICLE INFO

Keywords:

Micropollutants
Bioremediation
Immobilized enzyme
Wastewater
Enzymatic Bioreactor

ABSTRACT

Enzymatic conversion of micropollutants into less-toxic derivatives is an important bioremediation strategy. This paper aims to critically review the progress in water and wastewater treatment by both free and immobilized enzymes presenting this approach as highly efficient and performed under environmentally benign and friendly conditions. The review also summarises the effects of inorganic and organic wastewater matrix constituents on enzymatic activity and degradation efficiency of micropollutants. Finally, application of enzymatic reactors facilitate continuous treatment of wastewater and obtaining of pure final effluents. Of a particular note, enzymatic treatment of micropollutants from wastewater has been mostly reported by laboratory scale studies. Thus, this review also highlights key research gaps of the existing techniques and provides future perspectives to facilitate the transfer of the lab-scale solutions to a larger scale and to improve operationability of biodegradation processes.

* Corresponding author.

E-mail address: jakub.zdarta@put.poznan.pl (J. Zdarta).

<https://doi.org/10.1016/j.biortech.2021.126201>

Received 28 August 2021; Received in revised form 17 October 2021; Accepted 20 October 2021

Available online 26 October 2021

0960-8524/© 2021 The Author(s). Published by Elsevier Ltd. This is an open access article under the CC BY license (<http://creativecommons.org/licenses/by/4.0/>).

1. Introduction

The presence of micropollutants in wastewater and fresh water bodies is one of the most significant environmental challenges in all countries around the world. Pollutants such as pharmaceuticals, personal care products, industrial chemicals, and pesticides are omnipresent and it is challenging to remove them with high efficiency in wastewater treatment plants (WWTPs) due to their high stability and resistance to physicochemical and biological degradation. Thus, these micropollutants could easily pass to the surface and ground water having negative impact on the environmental health and human well-being. The long-term and uncontrolled contact with micropollutants could lead to irreversible changes in the environment and ecosystems and could provoke mutations and serious disruptions in living organisms.

Therefore, there is a need to develop and test advanced techniques capable for effective removal of micropollutants from real water solutions. The above-mentioned compounds can be removed by physicochemical methods including adsorption, membrane-based processes, photocatalysis and/or chemical oxidation as well as by biological methods using plants, microbes and enzymes (Cobas et al., 2016; Chaturvedi et al., 2021). Although physicochemical methods can be effective, they are energy-intensive, expensive and can generate toxic by-products. Thus, biological methods are considered as an interesting and promising alternative for removal of wide range of micropollutants usually with high efficiencies and significantly less unintended effect on the environment (Varga et al., 2019).

Biological treatment of micropollutants can be achieved via whole organisms or their selective extract such as enzymes. Application of whole organisms or plants and microbes is usually time-consuming. Furthermore, these organisms are sensible to harsh wastewater conditions and might lost their activity or can be degraded over the process (Azizan et al., 2021). By contrast, enzymes offer high activity and selectivity, quick catalytic action and performed well in biocatalytic conversion of water soluble compounds of various origin, even presented in trace amounts. Enzymes are also less prone to inhibition by substances toxic to living organisms (Feng et al., 2021). Further, comparative environmental assessments show enzymatic treatment of micropollutants as process that mitigate negative effect of the treatment and its final products on environment. Enzymatic treatment requires also less toxic solvents, water and energy. Enzyme could be applied as free (crude enzymes or purified enzymes) and as immobilized biocatalysts, that affect both, bioremediation efficiency and operability and reusability of the biocatalysts (Shakerian et al., 2020). Further, proper design of the enzymatic system reduce enzyme consumption during the process and facilitate application of an enzymatic reactors for continuous treatment of water solutions. Among six different classes of enzymes, oxidoreductases (EC1) including laccases, tyrosinases and peroxidases as well as hydrolases (EC3) such as lipases are the most commonly used for environmental application. Various oxidoreductases, due to their wide substrate specificity, are capable for treatment of wide range of micropollutants including pharmaceuticals, personal care products, dyes, pesticides, hormones, phenol and its derivatives, whereas lipases and other hydrolases could efficiently convert oils, greases or plastics (Zdarta et al., 2018a; Morsi et al., 2020).

Recently, various enzymes have been reported to treat water pollutants efficiently. However, most of the currently available studies, have been performed in a laboratory scale or in a pilot scale reactors using model solutions of pollutants and only a few studies show enzymatic treatment of real wastewater. To facilitate widespread application of biocatalyst and to promote enzymatic treatment for removal of pollutants from water it is required to summarize and discuss available literature reports on this topic, with special attention given to oxidoreductases, as these enzymes exhibit the widest practical application. In this review, for the first time achievements on the enzymatic removal of micropollutants from real and synthetic wastewater and WWTPs effluents by free and immobilized enzymes are summarized and discussed.

This paper provides also an overview on the roles and the types of enzymes for wastewater treatment. In the review influence of wastewater matrix constituent on removal efficiency and enzyme activity is systematically discussed. Further, various types of micropollutants and their effect on enzymes as well as different approaches for removal of persistent compounds are highlighted and discussed, followed by a discussion on possible future trends and studies facilitating development of enzyme-based technologies for wastewater treatment. The idea of this review article is also to point out the main challenges in the practical application of enzymatic systems for micropollutants removal to facilitate designing and development of efficient biocatalytic solutions for industrial applications. The knowledge about effect of inhibitory agents on enzyme activity and suitability of selected enzymes for treatment of various micropollutants as well as hints on construction of enzymatic membrane reactors could facilitate practical use of enzymatic treatment around the world. This knowledge is of particular interest for developing countries such as India and China, which environment is polluted by significant amounts of pesticides or dyes. Nevertheless, presented findings could be useful also for a well-developed countries in Europe and North America, where waters are polluted by pharmaceuticals and personal care products. It should be added that recently laccases and peroxidases commercially produced by MetGen and Novozymes have been applied in WWTPs in Europe to treat textile wastewater and wastewater contains phenolic compounds.

2. Micropollutants of concern in wastewater

Micropollutants are omnipresent in wastewater and WWTPs effluents. A significant number of these compounds is out of control due to very limited regulations. Currently there is no legal limits for micropollutants discharge, however some regulations have been introduced. Since 2000 European Union has set up a strategy to define toxic substances and their intermediates in wastewater. In 2015 the list of priority high risk compounds, including hormones, pharmaceuticals, personal care products and food additives, to be observed and neutralized in the near future was published by The European Commission (Barbosa et al., 2016). Since that time, further work has been carried out around the world on new regulations, also concerning the effect of degradation products of pollutants. However, up to date there is still no strict regulations on limits of micropollutants discharge and their presence in WWTPs effluents (Rogowska et al., 2020).

The largest groups of hazardous micropollutants are pharmaceutically active compounds (including various anti-inflammatory substances, pain relief compounds and hormonal contraceptives) and personal care products (e.g. surfactants, antibacterial compounds). The main sources of both pharmaceutical and personal care product pollutants in the environment are domestic wastewater (Asif et al., 2018; Chen et al., 2020). Their concentrations varied from a few ng to mg per litre with potential toxicity impact on aquatic organisms even at trace levels (Tiwari et al., 2017). For example, Zuccato et al. (2006) observed that a mixture of pharmaceuticals of ibuprofen, ofloxacin, ciprofloxacin, furosemide, and sulfamethoxazole in Italian rivers, elicited a negative impact on human embryonic cells (HEK293) by decrease in proliferation and cell cycle progression. Balbi et al. (2018) determined the effect of diclofenac – nonsteroidal anti-inflammatory drug – exposure dose on the marine bivalve (mollusc) *Mytilus galloprovincialis*. It was shown that 1 µg/L of diclofenac in waters affects gene transcription in the early development stages. The toxicity of other groups of pharmaceuticals, e.g. antidepressants, were investigated by Minguéz et al. (2014). They observed that EC₅₀ of sertraline and clomipramine for *Daphnia magna* were 1.15 mg/L and 2.74 mg/L respectively. Estrogens are another type of pharmaceutical compounds in wastewater and WWTPs effluents, that have been also detected in lagoon pond and sea water, in concentrations exceeding the estrogenic activity threshold of 1 ng/L (Adeel et al., 2017). It was shown that in fish exposed to effluents consist of estrogens, such as 17β-estradiol and 17α-ethynylestradiol at concentration 11.1

ng/L and 0.5 ng/L, feminine features were highly developed (Liney et al., 2005, Liney et al., 2006).

Personal care products might negatively affect the aquatic system and a range of living organisms. UV filters and stabilizers, present in sunscreens, perfumes, creams, or shampoos, represent such a type of personal care product chemical which could enter the surface and groundwaters from WWTPs or from the sewage network in urban areas. It was shown that their concentration in rivers can reach up to 60 ng/L (Jurado et al., 2014). Ethylhexyl-methoxycinnamate is used as an ultraviolet light absorbant in both cosmetics and personal care products such as sunscreens, and has been shown to have a toxic effect on snails *Potamopyrgus antipodarum* and *Melanoides tuberculata* (Kaiser et al., 2012). Other negative effects of chemicals found in personal care products have been extensively reviewed elsewhere (Schneider and Lim, 2019). Another major group of micropollutants is dyes and industrial chemicals from textile industry. Each year, an estimated of over 900 million tons of sewage comes from the textile industry. Textile wastewater contains dyes has strong biological toxicity and the carcinogenic, teratogenic and mutagenic properties (Iark et al., 2019; Guo et al., 2020; Varjani et al., 2020). Notably, dyes have complex chemical structure and are hardly biodegradable in conventional WWTP process. This increases their frequent occurrence in the environment. Dye compounds have potential health impact on human such as tingling and watery eyes or sniffling as well as asthma and allergic skin reactions (Lellis et al., 2019). In addition, it is worth adding that the presence of dyes may limit light penetration in the water, which may significantly affect photosynthesis rate of aquatic life (Liu, 2020).

Pesticides also have a significant impact on the natural environment. Annually, hundreds of tons of pesticides are used in horticulture and agriculture (Rodríguez-Liévana et al., 2014) and pollute drinking water resources (Münze et al., 2017). In addition, mixtures of pesticides present in the environment pose problems because of synergistic effect of all of the pollutants (Fernández-Alba et al., 2001). Low pesticide concentrations might not cause any detectable health problems in humans, but might result in genetic disorders and physiological changes that ultimately affect life expectancy. Symptoms of pesticide poisoning can be divided into the muscarinic syndrome (tearing, sweating, gastrointestinal tone disturbance, nausea, vomiting, diarrhea, urinary incontinence, bronchospasm, miosis, and bradycardia) as well as the nicotine syndrome (tremors, spasms, hypertonicity, hyperreflexia, paralysis, muscle weakness, tachycardia, pallor, hyperglycemia and hypertension). In addition, pesticides can significantly affect the central nervous system, manifested by anxiety, headache, dizziness, ataxia, sleep and memory disorders, convulsions, and also respiratory depression or coma (Bernardes et al., 2015). It should be emphasized that in groundwater at least 143 different pesticides and over 20 products resulting from their transformation have been found (Aktar et al., 2009). Studies presented by Köck-Schulmeyer et al. (2013) showed that even after wastewater treatment, pesticide concentrations are still high, up to 684 ng/L for diazinon in the WWTP effluent. The compounds that pose the greatest problems include diazinon and diuron, followed by atrazine, simazine, malathion, chlortoluron, terbutylazine and isoproturon. Therefore, most pesticides compounds are subject to environmental quality standards and analyses.

3. Enzyme-mediated bioremediation process

Enzymes the most frequently applied for removal of pollutants are oxidoreductases (EC 1), including laccase (EC 1.10.3.2), tyrosinase (EC 1.10.3.1) and peroxidases (EC 1.11.1.X) such as horseradish peroxidase (EC 1.11.1.7, HRP), chloroperoxidase (EC 1.11.1.10), lignin peroxidases (EC 1.11.1.14, LiP), manganese peroxidase (EC 1.11.1.13, MnP) and/or soybean peroxidase (EC 1.11.1.7, SBP) (Ladole et al., 2020; Pereira et al., 2020). These enzymes catalyze conversion of various aromatic and non-aromatic compounds by a radical-catalyzed oxidation of phenolic moieties of organic compounds with simultaneous reduction of

molecular oxygen (laccase, tyrosinase) or hydrogen peroxide (peroxidases) to water. Laccase and tyrosinase due to their low substrate specificity catalyze mainly oxidation of monophenols, diphenols and polyphenols as well as diamines and aromatic amines. However, their catalytic action differ significantly. Laccase generates a free phenoxy radicals during reaction, whereas tyrosinase generates quinones during oxidation as intermediates. Peroxidases are also capable for conversion of wide range of compounds including various monomeric and dimeric phenols, aromatic phenols and non-phenolic compounds including dyes, pharmaceuticals and even xenobiotics also via free radicals formation as intermediates (Zdarta et al., 2018a). It should be highlighted that although intermediates formed during reaction (i.e. free phenoxy radicals) could be considered as more toxic than initial compounds, these intermediates react with each other immediately. They create various combinations of C–C and C–O bonds leading to formation of dimers, trimers and oligomers of parent compounds as a final products of the reaction (Zdarta et al., 2021). These oligomeric products are known by their significantly lower toxicity as compared to initial micropollutants. Further, they could be easily separated from the post-reaction mixture by simple precipitation and centrifugation, that facilitates obtaining of the pure stream of final solution.

The catalytic activity of these enzymes towards micropollutants depends mainly on source of their origin and extent of glycosylation. Enzymes are mainly produced from fungi, yeast and plants. Animal based enzymes has not been used for micropollutants remediation mainly due to low stability and fast denaturation in the presence of inhibiting compounds (Meng et al., 2017). The glycosylation is an enzymatic process leading to the formation of biopolymers in the enzyme biomolecules affecting enzyme structure, aminoacids arrangements and redox potential (Asif et al., 2017). Redox potential is another important factor affecting enzyme catalytic properties. High redox potential of enzyme increases its ability to acquire electron during the oxidation of micropollutants. Amongst the abovementioned enzymes, lignin peroxidase has the highest redox potential of around 1.2 V and might be more frequently used in remediation processes. Recombinant and expressed enzymes have also gained considerable attention as new enzyme source for micropollutant removal. Recombinant technology became a suitable technology to produce enzymes more stable and resistant against inactivation and characterized by wider substrate specificity (Bhatt et al., 2021). Further, recombinant enzymes are capable to generate desired final products and are easier to use, however, due to genetic modification, they are also usually more expensive (Asemoloye et al., 2021). Enzymes that have been applied for bioremediation process are often used as free or immobilised on carriers (Section 3.1 and 3.2).

When considering practical application of enzymes, also economic aspects should be taken into account. The main drawback of the enzymatic treatment of pollutants are costs of the process, particularly costs of the enzyme. Nevertheless, beside costs of the biocatalyst production and purification also money input of enzyme immobilization, when implemented, has to be considered. Further, costs of biodegradation process, including reactor costs, required reagents and energy consumption has to be deliberated. Finally, also money input for products separation from post-reaction mixture and cost of their utilization and detoxification should be taken into account. It is challenging to clearly define the medium costs of the enzymatic treatment, because a numerous of variables and parameters differ from each other in the single process. Nevertheless, some studies reported on economic evaluation of enzymatic treatment of micropollutants. López et al. (2011) reported that overall costs of phenol treatment by free manganese peroxidase are around 15-fold lower as compared to immobilized enzyme, mainly due to loss of enzyme activity upon immobilization. Abejon et al. (2015) presented data showing that laccase treatment of 1 m³ of wastewater containing antibiotics costs around 13 Euro, that is around 20-fold higher as compared to photo-Fenton or electron beam treatment. However sustainability of the process and low toxicity of final mixtures might overcome this disadvantage.

3.1. Application of free enzymes

Free enzymatic system capable for removal of pollutants can be divided into purified (isolated) enzymes and crude enzymes. Crude enzymes from white-rot fungi culture could contain three enzymes (i.e. laccase, LiP and MnP) at different concentration. Although both systems are capable for efficient transformation of hazardous compounds, each of these approaches have advantages and disadvantages. Application of crude enzymes could be cheaper than purified enzymes bypassing the purification process. Crude enzymes could degrade or convert different compounds in wastewater matrix (Lonappan et al., 2018). Crude oxidoreductase enzymes might also contain mediators in the extract, that increase the redox potential of the enzyme and expands the variety of the micropollutants to be converted (Nguyen et al., 2016a). It was reported, that the presence of mediators, such as 1-hydroxybenzotriazole (HBT), syringaldehyde (SA), or 2,2'-azino-bis(3-ethylbenzothiazoline-6-sulfonic acid) (ABTS) might improve the biodegradation rate of laccase even up to 40%, as compared to the purified enzyme (Morsi et al., 2020). On the other hand, crude enzymes usually show lower activity as their free counterparts and might be partially inhibited by the extract constituents. Application of purified enzymes, by contrast, offers several advantages, including targeted and efficient treatment of the pollutants, lower prone to inhibition and high activity over wide range of process conditions (Robinson, 2015). Further, process control and its operation ability are also usually enhanced using purified enzymes due to the familiarity of enzyme optimal conditions, reaction mechanism and limited side reactions (Stadlmair et al., 2018). However, purified enzymes required time-consuming and cost-effective methods of enzyme isolation and purification. For a real wastewater treatment a compromise must be therefore found that depends on costs of the

enzymes, their purity and activity as well as capability to convert wide range of hazardous compounds. Recently, for the removal of micropollutants from real wastewater, both purified and crude enzymes were applied. Although study concerning enzymatic treatment of real and/or synthetic wastewater are limited, the most commonly used are oxidoreductases, among which laccases are of the highest interest. The summarized data on removal of micropollutants from real and model wastewater are summarized in Fig. 1.

Lonappan et al. (2017) used 17.8 U/L of purified white rot fungi *Tremetes versicolor* laccase for conversion of diclofenac from synthetic wastewater reaching 98% process efficiency after 24 h treatment. No diclofenac nor its conversion products were detected suggesting hydroxylation and final mineralization as main mechanism of degradation and making this solution promising for reduction of estrogenic activity. Purified laccase from *Tremetes versicolor* was used to decompose of 2,4-dinitrophenol with concentration of 1.5 mg/L from synthetic wastewater with 98.5% pollutant removal efficiency after 4 h of the process. Note, however, that free laccase quickly lost its activity in the presence of synthetic wastewater, therefore ABTS was used a mediator to improve removal rate (Rahmani et al., 2020). Recently, a novel research direction was established as enzymes were applied for removal of anticancer drugs. Commercially available, purified laccase from *Tremetes versicolor* at enzyme dosage of 20 U/L was found to be capable for complete degradation of doxorubicin at concentration up to 500 µg/L from model wastewater within 6 h. It was also shown that effective degradation was supported by the significantly lower toxicity of treated mixture due to formation of low-toxic oligomers (Kelbert et al., 2021). Laccase capability towards pollutant removal was also tested in more complex solutions. Purified *Tremetes versicolor* laccase was able to remove over 75% of bisphenol A, 17 α -ethinylestradiol and triclosan from tap water and

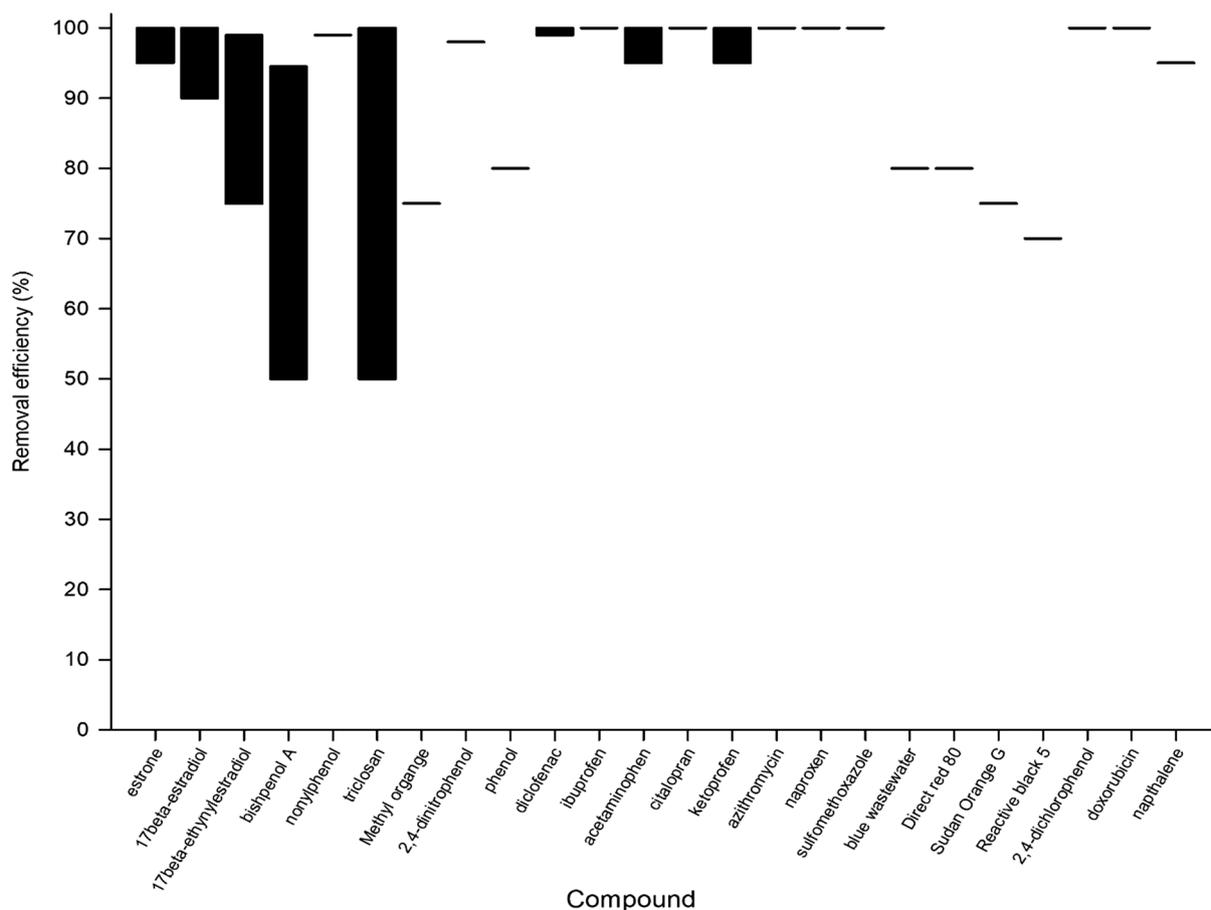


Fig. 1. Variations in the removal efficiency of micropollutants catalyzed by free oxidoreductases. Based on data presented in Section 3.1.

over 50% of these pollutants from real wastewater, proving negative effect of mainly heavy metal ions on enzyme activity. It was also reported that in wastewater solution, due to slight changes in enzyme microenvironment, its optimum activity was shifted toward neutral pH conditions (pH 6–7) (Maryskova et al., 2021). Spina et al. (2020) used purified *Tarbetes pubescens* laccase at low enzyme dosage for degradation of 15 micropollutants, including pesticides, personal care products and pharmaceuticals from wastewaters collected after the primary sedimentation and the final WWTP effluents, resulting in complete removal of 2,4-dichlorophenol and triclosan and at least 80% removal of half of the analyzed compounds. To improve decolorization efficiency of 18 azo dyes from model wastewater, purified bacterial laccase from *Bacillus subtilis* was supported by the azoreductase PpAzor from *Pseudomonas putida*. Due to synergistic action of both enzymes decolorization level of model wastewater reached 80% followed by around 50% detoxification (Mendes et al., 2011). Cruz-Morató et al. (2013), used crude *Trametes versicolor* laccase for degradation of pharmaceuticals in non-sterile urban wastewater. The removal efficiency of 14 different pharmaceuticals was followed, among which ibuprofen, acetaminophen, ketoprofen, azithromycin, propranolol, 2-hydroxyCBD and citalopram were degraded completely at enzyme dosage of 25 U. This study shown that crude laccase is able to convert pharmaceuticals at low concentration from real wastewater samples, however, bacteria, surfactants and organic and inorganic contaminants presented in wastewater matrix affect removal rates of pharmaceuticals due to inhibition of enzyme activity. Crude *Trametes versicolor* laccase was also tested in pretreatment of hospital effluents consisted of high load of pharmaceutically active compounds and endocrine disruptor compounds (EDCs). Non-sterile treatments resulted in partial or complete removal of 46 compounds followed by the significant reduction of wastewater toxicity. It was also reported that complex mixture of pharmaceuticals affect process time, required to achieve high removal of the pollutants. (Cruz-Morató et al., 2014). Another type of wastewaters, blue wastewater from aircraft, were also subjected to degradation using crude *Trametes versicolor* laccase at 18 U/L dosage. The degradation studies were preceded by optimization of the laccase fermentation conditions, to produce high laccase activity and to overcome negative effect of wastewater matrix components on enzyme properties. Significant reduction of chemical oxygen demand and increase of biodegradability index of the treated wastewater indicate effective degradation of recalcitrant pollutants and prove that high laccase activity is required to attain high remediation rate of real wastewater (Atilano-Camino et al., 2020). As mentioned earlier, also source of the enzyme might affect its ability to convert micropollutants. Becker et al. (2017) showed that laccase from *Myceliophthora thermophila* is for about 10% more efficient than laccase from *Trametes versicolor* in removing of mixture of hormones and endocrine disrupting compounds and its estrogenic activity from wastewaters even at low enzyme dosage. These differences are probably related to the aminoacids orientation in the active sites of both enzyme that slightly differ from each other. It was also reported that recombinant enzymes could be considered as efficient in removal of micropollutants. Recombinant laccase from *Cerrena* sp. HYB07 was purified and used for decolorization of real textile effluents showing over 60% of process efficiency after 6 days (Yang et al., 2014). Recombinant laccase form *Moniliophthora roreri* showed higher biodegradation potential towards 17 β -estradiol, estriol, 17 α -ethinylestradiol and bisphenol A over wider pH range (from 5 to 7), as compared to free laccase from *Trametes versicolor* (Bronikowski et al., 2017). In addition, recombinant *Agaricus bisporus* tyrosinase in *Saccharomyces cerevisiae* cells showed high activity and great potential towards micropollutants removal indicating also that gene cloning and enzyme recombination provides good potential for protein engineering and functional studies of oxidoreductase enzymes (Lezzi et al., 2012).

Wide range of hydrogen peroxide-dependent peroxidases was found to efficiently convert organic micropollutants. Although most of the studies on this issue were performed using model water solution, some

studies report conversion of pharmaceuticals and estrogens from real wastewater matrix using peroxidases of various origin. Auriol et al. (2007) and Auriol et al. (2008) reported complete degradation of estrone, 17 β -estradiol and estriol from synthetic wastewater and municipal wastewater within 1 h using horseradish peroxidase. A low enzyme dosage (0.032 U/mL) was required to treat synthetic wastewater. However an enzyme dose of around 10 U/mL was needed to remove pollutants from wastewater due to inhibition effect of real wastewater matrix compounds. In contrast to O₂ dependent laccase, HRP is H₂O₂ dependent enzyme, therefore proper hydrogen peroxide supply to the enzyme is also of key importance to achieve high removal rate. Na and Lee (2017) determined 20 μ M of H₂O₂ as optimal concentration leading to elimination of over 90% of 17 β -estradiol and bisphenol A and 100% of acetaminophen from WWTP effluents at an HRP dosage of 48 U/L. It was also observed that removal of compounds without phenolic moieties in the structure did not exceed 5% highlighting HRP substrate specificity. A promising and cheaper (Svetozar-ovic et al., 2021) alternative for horseradish peroxidase seems to be a familiar to HRP enzyme called soybean peroxidase. Crude SBP was capable for over 95% removal of triclosan, nitrophenol and steroidal hormones from municipal wastewater at low enzyme dosage (0.12 U/mL) and at optimized hydrogen peroxide concentration of 80 μ M. Further, a matrix effect on enzyme activity was observed in case of real wastewater treatment indicating that use of higher enzyme dosage was required to achieve high removal efficiency (Mashhadi et al., 2019). Also other peroxidases should be considered as available and easy obtainable alternatives for laccase and horseradish peroxidase. Purified chloroperoxidase extracted from *Caldariumyces fumago* at enzyme dosage of 5 U/L showed its robustness as in less than 10 min, diclofenac and naproxen were completely degraded from real wastewater leading to the formation of low-toxic oligomers as the final reaction products (Li et al., 2017). The wide substrate specificity of the peroxidases should also be underlined. Purified peroxidase from *Aspergillus oryzae* removed efficiently phenol from industrial wastewater samples within 16 h. It was found however, that in the presence of 2% of formaldehyde almost no phenol removal was observed indicating inhibition of catalytic action of peroxidase (Sukan and Sargin, 2013). Also plant peroxidases are useful for removal of micropollutants. Peroxidase from *Luffa acutangula* showed over 75% removal of azo dye Methyl Orange from liquid effluents under optimized process condition (40 min, pH 3, 30 °C) using 2 mM hydrogen peroxide. Peroxidases extracted from agricultural and bio-wastes demonstrated nice performance in micropollutants removal, however, the removal rate is strongly dependent on pH, temperature, process duration as well as enzyme dosage (Chiong et al., 2016).

3.2. Application of immobilized enzymes

Immobilized enzyme aim to overcome two limitations of the free enzyme approach: i) reusability and ii) stability (Sheldon et al., 2021). Immobilized enzymes could retain their catalytic properties for long period of time. The supportive structure and protective effect of immobilized materials helps to maintain enzyme properties over a wider range of pH and temperatures conditions (Ölçücü et al., 2021). The immobilized enzyme also showed resilient to inhibition effects from different components in real wastewater. Immobilized enzymes facilitate also process operability and purity of final products (Lassouane et al., 2019). Enzyme reusability and prolongation of enzyme life-time reduces the operation cost (Basso and Serban, 2019). Type of enzyme, support material and type of immobilization affect final properties of the immobilized biocatalysts. Adsorption, covalent binding, encapsulation and cross-linking are the most frequently used techniques for oxidoreductases immobilization (Aricov et al., 2020; Zhang et al., 2020a, Zhang et al., 2020b, Zhang et al., 2020c; Aggarwal et al., 2021), whereas inorganic and hybrid materials were found to be the most suitable support for environmental application (Zdarta et al., 2018a). For the effective wastewater treatment it is essential to produce highly stable

systems, resistant to harsh process conditions and inhibition with high activity retention. Thus careful selection of support material and immobilization approach is required. Note also, that proper support selection, for instance use of highly porous material with well-developed surface area, might also facilitate removal of pollutants due simultaneous adsorption and biocatalytic conversion (Zdarta et al., 2019a). Nguyen et al. (2016b) noticed over 90% removal efficiency of bisphenol A, diclofenac, carbamazepine and sulfamethoxazole from wastewaters using laccase immobilized onto granular activated carbon due to biocatalytic conversion supported by adsorption. The percentage of the adsorption in total removal efficiency varied among compounds, however, adsorption was more pronounced (over 50%) in terms of carbamazepine and diclofenac, that are resistant to enzymatic treatment. Naghdi et al. (2016) used 25 mg of laccase immobilized on carboxyl functionalized nanobiochars for carbamazepine degradation in spiked water and secondary effluent. Around 85% of pollutant degradation was achieved with the contribution of biodegradation higher than 45% and adsorption lower than 35%. A summary of removal efficiency of micropollutants by immobilized enzymes is given in Fig. 2.

Immobilization approach and type of support materials affect both, enzyme activity and stability of the biosystems. Application of functional materials with desired properties improves also operationability of the immobilized enzymes. For instance magnetic particles, facilitate separation of the immobilized enzyme by external magnetic field (Sadeghzadeh et al., 2020). Functionalized silica magnetic nanoparticles were used as support for deposition of laccase cross-linked enzyme aggregates for removal of pollutants from wastewater. Produced systems containing around 150 mg/g of immobilized laccase allowed removal of around 40% of mefenamic acid and fenofibrate and around 20% of indomethacin and acetaminophen from spiked real secondary effluent (Arca-Ramos et al., 2016a, Arca-Ramos et al., 2016b), over 90% of

mefenamic acid, acetaminophen, diclofenac, carbamazepine and atenolol from municipal and hospital wastewaters (Kumar and Cabana, 2016) and 93% of diclofenac from synthetic wastewater (Primožič et al., 2020) indicating great practical possibility of these systems. In these studies also high reusability potential was highlighted due to possibility of quick biocatalyst separation. To reduce process costs and to reduce diffusional limitations, also cross-linked enzyme aggregates without support material might be applied. Cross-linked enzyme aggregates of laccase from *Trametes versicolor* showed over 85% activity retention and exhibited elimination rate of 90% for carbamazepine after 72 h treatment and 99% for acetaminophen and mefenamic acid after 24 h treatment from filtered wastewater (Ba et al., 2014a, Ba et al., 2014b).

For the real-life and long-term application of the immobilized enzymes in the wastewater treatment it is essential to create stable enzyme-support bonds and reduce enzyme elution. Thus, covalent immobilization is the most commonly applied using wide range of inorganic and organic supports, usually modified by hydroxyl, amine or carbonyl groups (Zdarta et al., 2018b). Amine functionalized fumed silica nanoparticles with covalently immobilized laccase of a *Thielavia* genus achieved over 60% of bisphenol A removal from tertiary wastewater treatment. Due to high operational stability, this system shows great scaling-up potential with suggested application in continuous membrane reactor (Gasser et al., 2014). Further, laccase from *Trametes versicolor* immobilized on glycidyl methacrylate modified polyacrylamide-alginate cryogel was used for decolorization of dyes and dephenolization of olive mill wastewater reaching over 80% of Congo Red, Chlorazol Black and Trypan Blue removal efficiency. By contrast, only around 30% decolorization efficiency of Fast Green FCF and Sunset Yellow FCF was noticed due to more complicated structure and higher resistance to enzymatic treatment (Yavas and Karagozler, 2021). Complete decolorization efficiency of batik wastewater was noticed by Yanto

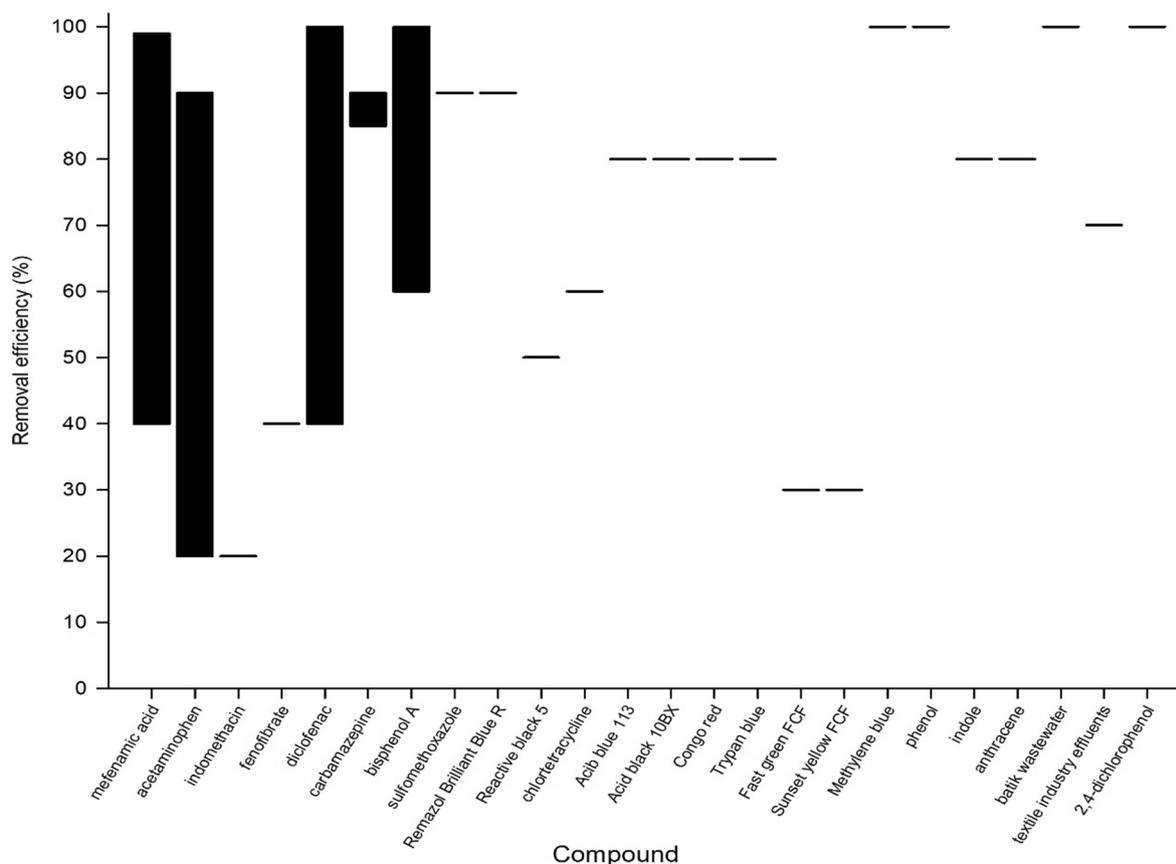


Fig. 2. Variations in the removal efficiency of micropollutants catalyzed by immobilized oxidoreductases. Based on data presented in Section 3.2.

et al. (2021) within 1 h, when 1 g of laccase from *Trametes hirsuta* EDN 082 immobilized on light expanded clay aggregate was added to 100 mL of the wastewater solution. Retention of over 95% decolorization efficiency after 4 repeated cycles was also observed. It should be underlined that in these studies limited enzyme elution from the matrix over storage time and repeated use was observed due to stable, covalent binding of the enzyme to the support. Although a numerous of materials were tested for oxidoreductase covalent immobilization, there is a growing need to develop and produce even more advanced tailor-made materials with desired and suitable properties for micropollutants removal. For instance, high stability, mechanical resistance, the presence of numerous of functional groups as well as properties improving direct transfer of the electron to immobilized enzyme are the most important (Alvarado-Ramírez et al., 2021). In this context, poly(lactic-co-glycolic acid) electrospun nanofiber served as support for laccase from *Pleurotus florida*. Support material showed high sorption capacity and allow retention of 83% of activity by laccase. Obtained systems containing over 180 mg of laccase per 1 g of support was also capable for complete removal of diclofenac (Sathishkumar et al., 2012). In another study poly(vinyl alcohol)/chitosan nanofibrous membrane was enriched with multi-walled carbon nanotubes that facilitate enzyme-substrate electron transfer, to immobilize commercially available laccase (Xu et al., 2015). Both systems showed 100% process efficiency in removal of diclofenac. Note however, that this research still need to be developed to facilitate large-scale application as tests were performed in a batch scale using model wastewater mimicking real wastewater.

Enzymes might be also co-immobilized to create multienzymatic systems. Due to the use of biocatalysts from various sources, their different substrate specificity and simultaneous action, it is possible to create systems with expanded spectrum of micropollutant removal. Laccase and tyrosinase were co-immobilized using chitosan in the form of combined cross-linked enzyme aggregates and exhibited removal of over 95% and 90% of acetaminophen from municipal wastewater and hospital wastewater, respectively (Ba et al., 2014a, Ba et al., 2014b). High redox potential *Trametes versicolor* laccase and a low redox, but low-cost *Myceliophthora thermophila* laccase were co-immobilized using fumed silica nanoparticles. Due to simultaneous action of both enzymes removal of bisphenol A reached over 99% from secondary effluent from a municipal WWTP. Diclofenac, however, was converted with significantly lower rate (around 40%) indicating resistance of this compound toward enzymatic oxidation under realistic conditions (Arca-Ramos et al., 2016a, Arca-Ramos et al., 2016b). Redox mediators improve reaction efficiency by facilitation of the electron transfer. A novel approach consisting of co-immobilization of laccase and mediator (ABTS) onto amino-functionalized ionic liquid-modified magnetic chitosan nanoparticles allow removal of over 80% of indole and anthracene and complete removal of bisphenol A and 2,4-dichlorophenol. Further, it was observed that in the presence of co-immobilized mediator, process was twofold more rapid as compared to single immobilized laccase (Qiu et al., 2021).

In order to retain high catalytic activity in environmental processes, adsorption immobilization is applied, where negative effect of immobilization on enzyme structure is limited. Over 200 mg of laccase from *Pleurotus florida* NCIM 1243 was immobilized by adsorption onto 1 g of cellulose nanofibers and was capable for removal of over 90% of Remazol Brilliant Blue R and around 50% of Remazol Black 5 from simulated dyes effluents. Degradation of other dyes was below 20% due to interfering effect of the simulated effluents matrix (Sathishkumar et al., 2014). In another study, laccase adsorbed onto polyacrylonitrile-biochar composite nanofibrous membrane showed over 60% of chlor-tetracycline removal efficiency from simulated wastewater. In this case, application of mediators might facilitate achievement of higher removal rate (Taheran et al., 2016).

Beside laccases, also immobilized peroxidases are used for removal of micropollutants, mainly due to broader pH and temperature tolerance of these enzymes (Melo et al., 2016). Wang et al. (2016) noticed

complete removal of phenol at 1 mM concentration from synthetic wastewater within 3 h by 50 U/g of horseradish peroxidase immobilized by covalent binding onto acrylonitrile beds presenting also significant reduction of post reaction mixture. Sun et al. (2017a), Sun et al. (2017b) cross-linked laccase aggregates onto ZnO/SiO₂ composite support reaching over 80% of Acid Blue 113 and Acid Black 10BX dyes removal. Further, due to additional cross-linking by diethylene glycol diglycidyl ether, immobilized HRP retained over 80% of its activity after 10 repeated uses. Manganese peroxidase at enzyme dosage of around 10 mg, immobilized onto chitosan beads allowed over 70% decolorization of textile industry effluents. Further over 50% reduction of total organic carbon and chemical oxygen demand in the treated effluents was attained. In all these cases however, high removal rate was achieved at relatively high and optimized hydrogen peroxide dosage, underlying strong effect of this co-substrate on reaction efficiency (Bilal et al., 2016). Still growing amounts of micropollutants forces developments of novel, highly effective enzymes capable for treatment of phenolic compounds. Recently, Ariaenejad et al. (2021) showed complete removal of Methylene Blue dye from wastewater using PersiManXyn1 model enzyme immobilized onto magnetic graphene oxide. Limited negative effect of salts and heavy metal ions on activity of immobilized enzyme was also noticed. Further, process might be easily boosted by the addition of NaBH₄.

4. Impacts of wastewater constitutions on enzymes

Wastewater constitutions include heavy metal ions, salts, organic solvents, organic acids, surfactants, and natural organic matter (NOM) have significant impact on both free and immobilized enzymes (Deska and Kończak 2019; Bilal et al., 2021). They inhibit or improve enzymatic activity and thus, influence micropollutant removal. The degree of inhibition/activation varies significant upon the wastewater constitution concentrations. In this section, current knowledge on the effect of wastewater matrix constituents on enzyme activity and the removal rate of pollutants is summarized. However, as literature data on real wastewater matrix effect are limited, the discussion delas also with literature reports concerning the use of simulated and/or model wastewaters, for a better understanding of the presented issues. General summary of the effect of various wastewater constituents on removal rate of pollutants is presented in Table 1.

4.1. Effect of cations and anions

Results have showed that cations at below 5 µg/L have no or minimal impact on the catalytic activity of enzyme in the bioremediation of micropollutants (Asif et al., 2017). However, the impact increased significantly at high cation levels. Laccases are sensitive to the presence of cations in wastewater. Cations such as Hg²⁺, Fe²⁺, Pb²⁺ might bind to the Type II and Type III laccase copper sites leading to enzyme inhibition. Further, cations could block the internal laccase electron transfer required to complete oxidation process (Kumar and Srikumar, 2012). Yang et al. (2020) reported the suppression of the laccase catalyzed removal of tetrabromo bisphenol A and bisphenol A due to the presence of Cd²⁺, Mn²⁺, and Co²⁺ in model wastewater and its binding to enzyme active sites. By contrast, addition of Na⁺ or K⁺ did not change removal significantly, whereas in the presence of high concentration of Ca²⁺ and Mg²⁺ (about 1–1.5 mM) decrease in reaction rate was noticed. Yadav et al. (2021) observed about 50% increase in the presence of Co²⁺ and about 30% in the presence of Cu²⁺ and Mn²⁺ ions in total removal rate of phenol, 4-chlorophenol and 4-fluorophenol catalyzed by around 25 mg of laccase immobilized using magnetic nanoparticles. Without the presence of copper and cobalt ions only small degradation of substituted phenol occurred. Positive effect of Cu²⁺ and Ca²⁺ ions on removal of triclosan from wastewater due to the promotion of laccase activity by these ions was presented by Sun et al. (2017a), Sun et al. (2017b). By contrast, significant reduction of pharmaceutical removal efficiency was

Table 1
The effect of water constituents on removal efficiency of micropollutants by free or immobilized oxidoreductases

Wastewater constituents	Enzyme	Form	Micropollutant	Removal efficiency (%)	Reference
cations and ions					
Cd ²⁺ , Mn ²⁺ , Co ²⁺ , Ca ²⁺ , Mg ²⁺	laccase	free	tetrabromobisphenol A	from 15% to 40%	(Yang et al., 2020)
inhibitory effect					
Co ²⁺ , Cu ²⁺ , Mn ²⁺	laccase	immobilized on magnetic silica nanoparticles	phenol, 4-chlorophenol, 4-fluorophenol	80% 70% 68%	(Yadav et al., 2021)
activation effect					
Cu ²⁺ , Ca ²⁺ , Al ³⁺ , Fe ²⁺	laccase	free	triclosan	95%	(Sun et al., 2017a, Sun et al., 2017b)
inhibitory effect					
Cu ²⁺ , Mg ²⁺ , K ⁺ , Ni ²⁺	laccase	free	industrial dyes in textile effluents	40% 50%	(Motamedi et al., 2021)
activation effect					
Fe ³⁺ , Cr ³⁺	horseradish peroxidase	free	phenol	over 95%	(Wagner and Nicell, 2002)
activation effect					
Cu ²⁺ , Fe ³⁺	horseradish peroxidase	immobilized onto magnetic polymethyl methacrylate fibers	phenol	55%	(Abdulaal et al., 2020)
organic solvents and acids					
Cl ⁻	laccase	free	bisphenol A, diclofenac	from 60% to 65%	(Margot et al., 2013)
inhibitory effect					
methanol, acetone	laccase	immobilized onto TiO ₂ nanoparticles	mefenamic acid bisphenol A	90%	(Hou et al., 2014)
inhibitory effect					
acetonitrile, acetone	laccase	free	bisphenol A	15% 40%	(Nelson and Anne, 2021)
inhibitory effect					
oxalic acid, citric acid	laccase	free	Congo Red, Methyl Green, Crystal Violet	over 70%	(Kumar et al., 2012)
inhibitory effect					
ethylenediamine-tetraacetic acid (EDTA)	laccase	free	Congo Red, Neutral Red	80% 75%	(Si et al., 2013)
neutral effect					
natural organic matter					
natural organic matter	laccase	free	17β-estradiol	94%	(Xia et al., 2014)
inhibitory effect					
natural organic matter	laccase	free	triclosan	60%	(Sun et al., 2016a, Sun et al., 2016b)
inhibitory effect					
natural organic matter	horseradish peroxidase	free	17α-ethinylestradiol	30%	(Yang et al., 2018)
inhibitory effect					
syringaldehyde, syringic acid, acetosyringone (natural organic matter mediators)	laccase	immobilized onto magnetic particles	sulfadiazine, sulfamethazine, sulfamethoxazole	over 95%	(Shi et al., 2014)
activation effect					
humic acid	laccase	free	17β-estradiol	85%	(Sun et al., 2016a, Sun et al., 2016b)
inhibitory effect					
humic acid	horseradish peroxidase	free	bisphenol A	82%	(Jiang et al., 2017)
activation effect					
Triton X-100	laccase	free	indole	80%	(Azimi et al., 2016)
inhibitory effect					
Triton X-100	laccase	free	bisphenol A	58%	(Alshabib and Onaizi 2020)
activation effect					
sodium dodecylbenzene-sulfonate, hexadecyl-trimethyl-ammonium bromide				around 40%	
inhibitory effect					
rhamnolipid	laccase	free	bisphenol A	65%	(Onaizi et al., 2021)
activation effect					
rhamnolipid	laccase	free	bisphenol A	60%	(Onaizi, 2021; Onaizi and Alshabib, 2021)
activation effect					
Merpol	laccase	free	Reactive Blue 19	85%	(Champagne et al., 2010)
neutral effect					

observed in this study in the presence of 10 mM Al³⁺ and Fe²⁺ ions due to the binding of these ions to the active site of the enzyme and blocking of the electron transfer. The thermostable/halotolerant metagenome-derived laccase (PersiLac2) assisted conversion of industrial dyes was boosted of around 50% in the presence of Cu²⁺, Mg²⁺, and around 20% in the presence K⁺ and Ni²⁺ in the model wastewater. It was also stated that in the presence of these ions over 50% decolorization of real textile effluents occurred, whereas without metal ions less than 20% decolorization was noticed (Motamedi et al., 2021). However, increased ionic strength of the solution due to the presence of Fe³⁺ and Cr³⁺ ions increased slightly removal efficiency of phenol from water and

wastewater (Wagner and Nicell, 2002). Positive effect of Cu²⁺ and Fe³⁺ ions on activity of HRP immobilized onto magnetic polymethyl methacrylate fibers was also observed by Abdulaal et al. (2020). In addition, the presence of anions such as Cl⁻, F⁻, SO₄²⁻ or NO₃⁻, due to competitive and non-competitive inhibition of anions with enzyme substrate, might reduce removal rate of micropollutants from wastewater. Chlorine ions at concentration below 10 mM has minimal impact of laccase activity. This impact did not cause any reduction in the removal of bisphenol A, diclofenac, and mefenamic. When concentration of Cl⁻ increase to 100 mM, over 30% drop in removal rate of all compounds was observed due to enzyme inhibition (Margot et al., 2013). The strongest inhibitory

effect on laccase activity show however hydroxyl anions that binds close to the TI and TII copper ion in laccase active site leading reduction of electron transfer ratio and to enzyme inhibition (Zdarta et al., 2019b). This effect is clearly observed at solutions at higher pH, in which laccase lost its catalytic properties rapidly.

4.2. Effect of organic solvents and organic acids

Organic solvents such as ethanol, methanol, dimethyl sulfoxide or acetone as well as organic acids including formic acid, acetic acid, oxalic acid and citric acid are another group of compounds interfering enzyme assisted micropollutants treatment. These compounds compete with reaction substrate for enzyme active site leading to competitive inhibition (Ademakinwa and Agboola, 2016). Further, solvents and acids might also change the pH of the solution leading to structural amino-acids rearrangements and decreasing enzyme activity (Arregui et al., 2019). Nevertheless, an inhibition effect of organic solvents and acids sternly depends on their concentration. A reduction in removal rate of laccase assisted remediation of triclosan of around 10% in the presence of acetonitrile and of around 5% in the presence of acetone and ethanol was noticed, indicating low negative effect of these solvents (Ramírez-Cavazos et al., 2014). Hou et al. (2014) used 180 mg of laccase immobilized covalently onto 1 g of TiO₂ nanoparticles and observed only 5% decrease of bisphenol A degradation from synthetic wastewater in the presence of 10% (w/w) of methanol and acetone. These indicates protection effect of support materials and high stability of the immobilized enzymes in the presence of organic solvents. By contrast, Nelson and Anne (2021) observed significant reduction of activity of laccase from *Aureobasidium pullulan* in the presence of 10% acetonitrile (80%) and 10% acetone (50%) due to penetration of enzyme active sites. The reduction of laccase activity results also in lower removal rate of bisphenol. Modification of laccase amino acids residues in the presence of oxalic acid and citric acid lead to over 90% and 70% enzyme inhibition. Nevertheless, removal of over 70% of Congo Red, Methyl Green and Crystal Violet was attained in the presence of these organic acids, however, extension of the process duration was required to reach high removal values (Kumar et al., 2012). Si et al. (2013) observed no negative effect of ethylenediaminetetraacetic acid (EDTA) in the concentration up to 0.1 mM on the 30 U/L dosage of purified laccase activity in removal of dyes mixture leading to 80% Congo Red and 75% of Neutral Red removal. Increase of EDTA concentration up to 1 mM results in only 5% decrease of catalytic activity.

4.3. Effect of natural organic matter

Natural organic matter and dissolved organic matter are a heterogeneous mixture of high to low molecular weight compounds including humic substances, carbohydrates, lignins, lipids, organic acids and other biological derived products generated at various stages of wastewater treatment (Xiao et al., 2016). It was reported that natural organic matter and dissolved organic matter account for 80% of chemical oxygen demand and around 85% of total organic carbon of the WWTPs effluents (Wang and Chen, 2018). Due to the great variety of various compounds in natural organic matter and dissolved organic matter their effect on enzymatic treatment of micropollutants can be multidimensional. For instance, natural organic matter only slightly inhibit (less than 5%) laccase assisted transformation of 17 β -estradiol. Dimers and oligomers of parent compound were detected as main conversion products indicating that natural organic matter has no effect on final process products (Xia et al., 2014). A significant decrease of triclosan conversion rate in laccase assisted transformation was observed in the presence of natural organic matter. Due to the limitation of self-coupling process of triclosan free radicals, the estrogen-humic acid cross-coupling compounds were determined as the main products (Sun et al., 2016a, Sun et al., 2016b). Around 15% lower conversion of 17 α -ethinylestradiol from wastewater by free horseradish peroxidase at enzyme dosage of 7 U/L was observed

in the presence of natural organic matter. Interestingly different mechanism of enzyme inactivation was observed. Low-weight natural organic matter act as a competitive substrates for HRP leading to its inhibition. Whereas high-weight natural organic matter compounds adsorbed 17 α -ethinylestradiol molecules reducing their availability for laccase (Yang et al., 2018). However, organic matter might consist also natural redox mediators such as syringic acid, syringaldehyde, vanillic acid, or *p*-coumaric acid that boost laccase activity. Shi et al. (2014) observed over 95% conversion rate of laccase catalyzed removal of sulfadiazine, sulfamethazine and sulfamethoxazole in the presence of syringaldehyde, syringic acid and acetosyringone, in less than 10 min at enzyme dosage of 6.7 U/L. The presence of methoxy groups in the mediators structure, which decrease redox potential and increase local density of electrons at phenoxy groups facilitates laccase oxidation of pollutants. Recently, a positive effect of humic acid that is a component of the natural organic matter, on removal rate of micropollutants has also been reported. At low horseradish peroxidase concentration (up to 50 U/L) humic acid slightly facilitate removal of bisphenol A (removal rate of around 90%) from real wastewater due to mitigation of enzyme inactivation. At enzyme concentration exceeding 100 U/L, increase in amount of humic acid provided transformation rate of bisphenol A to 82% (Jiang et al., 2017). By contrast, Sun et al. (2016a), Sun et al. (2016b) noticed about 10% lower removal rate of laccase conversion of 17 β -estradiol in the presence of humic acid. The presence of humic acid affect also mechanism of catalytic conversion of estrogen due to the inhibition of the extent of 17 β -estradiol self-coupling.

4.4. Effect of surface active agents

Surface active agents is a diverse group of compounds with cleaning properties that are also capable to improve compounds solubilization. The levels of surfactants in wastewater vary significantly among type of the pollutant and source of the effluent reaching usually between 0.1 and 1000 μ g/L (Bergé et al., 2018). Surfactants might be divided into two groups including non-ionic surfactants such as Triton X-100 and ionic surfactants such as sodium dodecyl sulphate or hexadecyltrimethylammonium bromide. The type of the surfactant affect type of its interaction with enzyme. Non-ionic surfactants have less pronounced effect on enzyme structure as only hydrophobic interactions occurred. By contrast, ionic surfactants might interact with charged enzyme molecules leading to more significant enzyme distortions (Azimi et al., 2016). Liu et al., (2018) reported slight decrease of the indole removal from model wastewater in the presence of Triton X-100 due to changes in the enzyme conformation and affected laccase-phenol interactions. Alshabib and Onaizi (2020) observed around 10% increase of bisphenol A removal efficiency in the presence of 1 ppm Triton X-100 in laccase assisted wastewater treatment at enzyme dosage of 43.6 U/L. Further, in the presence of 1 ppm sodium dodecylbenzenesulfonate or hexadecyltrimethylammonium bromide around 10% lower removal rate was observed, indicating negative effect of ionic surfactants on enzyme activity. However, increase of around 15% of bisphenol A removal in laccase treatment of wastewater was observed in the presence of rhamnolipid biosurfactant (Onaizi, 2021). In a continuous study, it was reported that 1 ppm rhamnolipid concentration positively affect also reaction kinetic and increase removal rate even in high salinity level (Onaizi and Alshabib, 2021). Merpol, a non-ionic surfactant presented in textile effluents show no negative effect on the structure of laccase from *Trametes versicolor* itself. However increase of Merpol concentration, decrease reaction rate and removal efficiency of Reactive Blue 19 form model textile effluents due to enzyme inhibition (Champagne et al., 2010). Summarizing, both denaturation and activation effect of surfactants in wastewater matrix on micropollutants removal was noticed.

5. Enzymatic reactor design and scale-up potential

Enzymatic membrane reactor (EMR) utilised membranes which have

pore size smaller than the molecular weight of an enzyme to prevent enzyme washout from a continuous operation. In the EMR, enzyme molecules may be freely circulating on the retentate side or immobilized onto the membrane surface or inside its porous structure. There are three common EMR processes in the literature (Fig. 3).

Laboratory scale EMR has provided promising results (Table 2). [Mendoza et al. \(2011\)](#) investigated the removal of azo dyes applying a laccase/mediator system in an EMR. They used a polysulfonate ultrafiltration (UF) membrane (MWCO 10 kDa) allowing a complete retention of enzyme within the reactor. Decolourization yields of 52 to 95% depending on the dye type were reported ([Mendoza et al. 2011](#)). [Chhabra et al. \(2009\)](#) demonstrated over 95% decolourization of Acid Violet by an EMR. [Katuri et al. \(2009\)](#) explored three different EMR configurations: direct contact EMR (i.e., laccase in suspension), laccase impregnated EMR (i.e., laccase enclosed in a dialysis bag housing a 12 kDa membrane, which prevented laccase diffusion into the buffer solution and allowed dye diffusion into the laccase solution for reaction) and immobilized EMR (laccase immobilized on poly-vinylidene fluoride and chitosan membranes) for the removal of Acid azo dye. The decolourization efficiency of each reactor configuration depends on enzyme stability and mass transfer limitations between enzyme and substrate. Among the different EMR configurations, immobilization of laccase on poly-vinylidene fluoride and chitosan membranes showed better decolourization efficiency of up to 8 and 21 batches, respectively. This was presumably due to a combination of improved enzyme stability and mass transfer. [Lloret et al. \(2012b\)](#) investigated the removal of two estrogens (i.e., estriol and 17 β -estradiol) by a commercial laccase from *Myceliophthora thermophila* in an EMR equipped with UF membranes with a nominal pore size of 10 kDa. Removal efficiencies between 64 and 100% were obtained under an enzymatic activity of 500 U/L. The EMR allowed the reuse of the enzyme providing an important cost reduction. [Nicolucci et al. \(2011\)](#) immobilized laccase on polyacrylonitrile beads and submerged the beads in a fluidized bed reactor for the removal of bisphenols (i.e., bisphenol A, bisphenol B and bisphenol F). Complete removal (effluent concentration below detection limit) of all bisphenols was obtained on that study. In a more recent study, [Nguyen et al. \(2014\)](#) used a commercial laccase in a direct contact EMR for the removal of

diclofenac and bisphenol A. A stable removal of bisphenol A (>85%) and diclofenac (>65%) was achieved in that study. [Asif et al. \(2020\)](#) utilised high retention nanofiltration membrane for enzyme retention and degradation of 29 emerging trace organic compounds. The NF-EBR could provide higher removal of 19 compounds compared to the ultrafiltration-EMR.

Although the application of membrane help to retain enzyme within the reactor, enzyme denaturation due to various physical and chemical factors during continuous operation necessitates enzyme replenishment. The enzymatic reduction could accelerate in the presence of wastewater constitutions (Section 4). [López et al. \(2004\)](#) reported a 27% reduction in enzymatic activity from a single addition after 8 h. Drop in enzymatic activity during EMR operation was also observed by [Hata et al. \(2010\)](#). The authors reported a rapid decrease (70%) in enzymatic activity during the first 4 h of operation. However, a strategy involving addition of laccase and a mediator every 8 h enhanced the performance of carbamazepine removal. [Lloret et al. \(2012a\)](#), however, reported stable enzymatic activity over 10 h of operation of an EMR. [Nguyen et al. \(2014\)](#) observed a complete denaturation of enzymatic activity after 72 h of operation of an EMR with a single addition of enzyme. The authors proposed a strategy to maintain enzymatic activity by addition of 200 μ L of the commercial laccase solution per L of the reactor volume every 12 h (equivalent to a laccase dose of 23 mg/L·d).

Apart from enzyme reinjection, different methods have been reported to minimize the loss of enzyme during operation of an EMR. For example, ethylenediaminetetraacetic acid and polyethylene glycol, which are believed to possess a protecting role for proteins, especially under oxidative stress, may be added to an EMR ([Mendoza et al. 2011](#)). The obtained results demonstrated the need for high improvements in the amount of enzyme grafted on the membranes or on enzymatic kinetics to afford the technical and economic competitiveness of the investigated designs and the possibility to be implemented within existing installations ([Abejón et al., 2015a](#), [Abejón et al., 2015b](#)).

6. Challenges and future perspectives

This review provides comprehensive understanding of the micropollutants removal by free and immobilized enzymes. However, the data from literature was mainly obtained from studies using a synthetic wastewater (i.e. micropollutants in ultrapure water). Before the implementation of free or immobilized enzyme for wastewater treatment processes, performance assessment using real wastewater would be required. Impact of wastewater constitutions on enzyme stability and performance highlighted the challenge in its application in practice. Biodegradation of enzyme by bacteria in the wastewater may be significant and has also not been studied in the literature. Given the impact of wastewater constitutions and enzyme degradation, enzyme treatment of micropollutants should be applied at tertiary stage or as polishing steps in the wastewater treatment process. On the other hand, preliminary wastewater treatment to remove inhibitors and further application of enzymatic treatment before wastewater enter to WWTP might also results in high biodegradation rate of micropollutants.

Immobilization of enzymes on carries appears to be a potential method to retain and increase enzyme stability compared to free enzyme applications. Nevertheless, immobilized enzymes also accompany with enzyme activity loss. The inclusion of enzyme immobilization materials and process would be minimal to overall cost. Advanced materials such as graphene oxide and metal organic framework composites have showed high efficiency on enzyme binding and stability compared to traditional carbon-based materials. Immobilization provides also protection of enzyme structure against inactivation and facilitate enzyme reusability that reduce the overall process costs. Finally, oriented enzyme immobilization could significantly reduce the inhibitory effect of wastewater matrix compounds improving enzyme activity at real process conditions.

Enzymatic membrane reactors are promising to improve removal

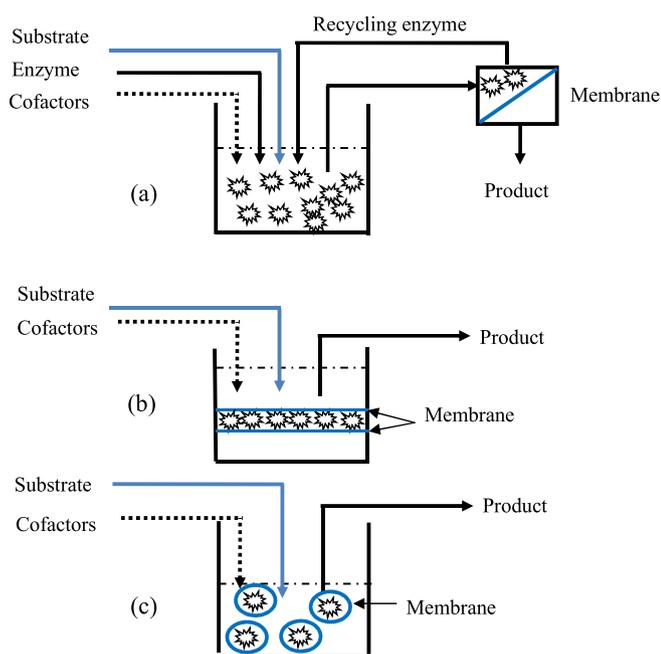


Fig. 3. Schematic diagram of three different configurations of EMRs. (a) enzyme in suspension in a reactor coupled with membrane units, (b) enzyme immobilized within the membrane matrix itself and, (c) enzyme entrapped in gels or microcapsules.

Table 2
Summary of recent studies on EMR for removal of micropollutants.

Membrane material (MWCO, kDa)	Enzyme (activity)	Compound (concentration, mg/L)	HRT (h)	Reactor volume (mL)	Reference
UF polyethersulfone membrane (10)	laccase (500 and 1000 U/L)	estriol and 17 β -estradiol (4)	1–4	250	(Lloret et al. 2012a)
UF polyethersulfone membrane (10)	laccase (500 U/L)	estriol and 17 β -estradiol (4)	2–4	250	(Lloret et al. 2012b)
UF polyacrylonitrile membrane (6)	laccase (70–100 μ M/min)	diclofenac and bisphenol A (0.5)	8	1500	(Nguyen et al. 2014)
UF polyethersulfone membrane (10)	manganese peroxidase (7000 U/L)	Orange II (100)	0.3, 0.75, 1 and 1.5	250	(López et al., 2004)
UF polyacrylonitrile membrane (20)	laccase (100 U/L)	Acid Violet 17 (76)	4, 6, 8, 10, and 16	250	(Chhabra et al. 2009)
UF polyethersulfone membrane (10)	purified laccase (8750 U/L)	Acid azo (20)	3	70	(Katari et al. 2009)
UF polyacrylonitrile membrane	laccase (180 μ M/min)	29 emerging trace organic compounds	24	3000	(Asif et al., 2020)
NF membrane	laccase (180 μ M/min)	29 emerging trace organic compounds	24	3000	(Asif et al., 2020)
UF regenerated cellulose membrane (100)	phosphotriesterase (6.4 μ M/min-mg)	paraoxon-ethyl (1 mM)	>1	50	(Vitola et al., 2021)
polyvinylidene fluoride/carboxylated multi-walled carbon nanotubes (-)	laccase (4.46 U/cm ²)	diclofenac and carbamazepine (5 ppm)	48	50	(Masjoudi et al., 2021)
NF polyethersulfone membrane (75)	laccase (0.59 U/cm ²)	bisphenol A (34.2)	7	5000	(Li et al., 2020)
NF polysulfone membrane (0.2–0.3)	laccase (0.53 U/mg)	bisphenol A (10)	36	30	(Zhang et al., 2021)
Porous zeolite-like geopolymer membrane (-)	laccase (100 U/mg)	Crystal Violet (5)	10	100	(Zhang et al., 2020a, Zhang et al., 2020b, Zhang et al., 2020c)

efficiency. EMRs enhance process operationability and facilitate continuous wastewater treatment reducing time and costs of the process. Further, EMRs equipped with membranes with immobilized enzymes, beside efficient biodegradation of micropollutants, allows also simultaneous membrane separation of process products to obtain final stream at high purity and low toxicity.

Enzyme based wastewater treatment has gain traction with some commercially available enzymes. However, its cost is still a high margin, hinder their industry uptake. Future studies should include life-cycle assessment and techno-economic assessment to comprehensively reveal the enzyme based wastewater treatment feasibility.

7. Conclusions

Enzymatic treatment based on free and immobilized biocatalysts is a useful technique for the biodegradation of micropollutants including pharmaceuticals, steroid hormones, personal care products, pesticides, and industrial dyes. Enzymatic processes can be achieved under benign and environmentally friendly conditions. The effectiveness for removing of micropollutants from industrial and municipal wastewater has been demonstrated in numerous laboratory scale studies. Despite large scale applications in other fields, the deployment of enzymatic biodegradation for wastewater treatment is still limited. Further research is necessary to improve enzyme catalytic properties, develop multi-enzymatic systems, and integrate enzymatic treatment with other technologies for comprehensive wastewater treatment.

CRedit authorship contribution statement

Jakub Zdarta: Conceptualization, Supervision. **Teofil Jesionowski:** Supervision. **Manuel Pinelo:** Supervision. **Anne S. Meyer:** Supervision. **Hafiz M.N. Iqbal:** Supervision. **Muhammad Bilal:** Conceptualization.

Luong N. Nguyen: Conceptualization. **Long D. Nghiem:** Supervision.

Declaration of Competing Interest

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

Acknowledgements

This work was supported by the National Science Centre, Poland under the research Grant number 2019/35/D/ST8/02087.

References

- Abdulaal, W.H., Almulaiky, Y.Q., El-Shishtawy, R.M., 2020. Encapsulation of HRP enzyme onto a Magnetic Fe₃O₄ NP–PMMA film via casting with sustainable biocatalytic activity. *Catalysts* 10 (2), 181. <https://doi.org/10.3390/catal10020181>.
- Abejón, R., Belleville, M.P., Sanchez-Marcano, J., 2015a. Design, economic evaluation and optimization of enzymatic membrane reactors for antibiotics degradation in wastewaters. *Sep. Pur. Technol.* 156, 183–199.
- Abejón, R., De Cazes, M., Belleville, M.P., Sanchez-Marcano, J., 2015b. Large-scale enzymatic membrane reactors for tetracycline degradation in WWTP effluents. *Water Res.* 73, 118–131.
- Adeel, M., Song, X., Wang, Y., Francis, D., Yang, Y., 2017. Environmental impact of estrogens on human, animal and plant life: A critical review. *Environ. Int.* 99, 107–119.
- Ademakinwa, A.N., Agboola, F.K., 2016. Biochemical characterization and kinetic studies on a purified yellow laccase from newly isolated *Aureobasidium pullulans* NAC8 obtained from soil containing decayed plant matter. *J. Genet. Eng. Biotechnol.* 14 (1), 143–151.
- Aggarwal, S., Chakravarty, A., Ikram, S., 2021. A comprehensive review on incredible renewable carriers as promising platforms for enzyme immobilization & thereof strategies. *Int. J. Biol. Macromol.* 167, 962–968.
- Aktar, W., Dwaipayan, S., Ashim, C., 2009. Impact of pesticides use in agriculture their benefits and hazards. *Interdiscip. Toxicol.* 2, 1–12.

- Alshabib, M., Onaizi, S.A., 2020. Enzymatic remediation of bisphenol A from wastewaters: effects of biosurfactant, anionic, cationic, nonionic, and polymeric additives. *Water Air Soil Poll.* 231, 428.
- Alvarado-Ramírez, L., Rostro-Alanis, M., Rodríguez-Rodríguez, J., Castillo-Zacarias, C., Sosa-Hernández, J.E., Barceló, D., Iqbal, H.M.N., Parra-Saldívar, R., 2021. Exploring current tendencies in techniques and materials for immobilization of laccases – A review. *Int. J. Biol. Macromol.* 181, 683–696.
- Arca-Ramos, A., Ammann, E.M., Gasser, C.A., Nastold, P., Eibes, G., Feijoo, G., Lema, J. M., Moreira, M.T., Corvini, P.-F.-X., 2016a. Assessing the use of nanoimmobilized laccases to remove micropollutants from wastewater. *Environ. Sci. Pol. Res.* 23 (4), 3217–3228.
- Arca-Ramos, A., Kumar, V.V., Eibes, G., Moreira, M.T., Cabana, H., 2016b. Recyclable cross-linked laccase aggregates coupled to magnetic silica microbeads for elimination of pharmaceuticals from municipal wastewater. *Environ. Sci. Poll. Res.* 23 (9), 8929–8939.
- Ariaeenejad, S., Motamedi, E., Hosseini Salekdeh, G., 2021. Application of the immobilized enzyme on magnetic graphene oxide nano-carrier as a versatile bi-functional tool for efficient removal of dye from water. *Bioresour. Technol.* 319, 124228. <https://doi.org/10.1016/j.biortech.2020.124228>.
- Aricov, L., Leonties, A.R., Gifu, I.C., Preda, D., Raducan, A., Anghel, D.-F., 2020. Enhancement of laccase immobilization onto wet chitosan microspheres using an iterative protocol and its potential to remove micropollutants. *J. Environ. Manage.* 276, 111326. <https://doi.org/10.1016/j.jenvman.2020.111326>.
- Arregui, L., Ayala, M., Gomez-Gil, X., Gutierrez-Soto, G., Hernandez-Luna, C.E., De Los, H., Santos, M., Levin, L., Rojo-Dominguez, A., Romero-Martinez, D., Saparrat, M.C.N., Trujillo-Roldan, M.A., Valdez-Cruz, N.A., 2019. Laccases structure, function, and potential application in water bioremediation. *Microb. Cell Factories* 18, 200.
- Asemoloye, M.D., Marchisio, M.A., Gupta, V.K., Pecoraro, L., 2021. Genome-based engineering of ligninolytic enzymes in fungi. *Microbial Cell Fact.* 20, 20.
- Asif, M.B., Hai, F.L., Hou, J., Price, W.E., Nghiem, L.D., 2017. Impact of wastewater derived dissolved interfering compounds on growth, enzymatic activity and trace organic contaminant removal of white rot fungi - A critical review. *J. Environ. Manage.* 201, 89–109.
- Asif, M.B., Hai, F.L., Kang, J., van de Merwe, J.P., Leusch, F.D.L., Price, W.E., Nghiem, L. D., 2018. Biocatalytic degradation of pharmaceuticals, personal care products, industrial chemicals, steroid hormones and pesticides in a membrane distillation-enzymatic bioreactor. *Bioresour. Technol.* 247, 528–536.
- Asif, M.B., Hou, J., Price, W.E., Chen, V., Hai, F.L., 2020. Removal of trace organic contaminants by enzymatic membrane bioreactors: Role of membrane retention and biodegradation. *J. Memb. Sci.* 611, 118345.
- Atilano-Camino, M.M., Álvarez-Valencia, L.H., García-González, A., García-Reyes, R.B., 2020. Improving laccase production from *Trametes versicolor* using lignocellulosic residues as cosubstrates and evaluation of enzymes for blue wastewater biodegradation. *J. Environ. Manage.* 275, 111231. <https://doi.org/10.1016/j.jenvman.2020.111231>.
- Auriol, M., Filali-Meknassi, Y., Adams, C.D., Tyagi, R.D., Noguero, T.-N., Piña, B., 2008. Removal of estrogenic activity of natural and synthetic hormones from a municipal wastewater: effect of horseradish peroxidase and laccase from *Trametes versicolor*. *Chemosphere* 70 (3), 445–452.
- Auriol, M., Filali-Meknassi, Y., Tyagi, R.D., Adams, C.D., 2007. Oxidation of natural and synthetic hormones by the horseradish peroxidase enzyme in wastewater. *Chemosphere* 68 (10), 1830–1837.
- Azimi, M., Nafissi-Varcheh, N., Moghbari, M., Faramarzi, M.A., Abofazel, R., 2016. Study of laccase activity and stability in the presence of ionic and non-ionic surfactants and the bioconversion of indole in laccase-TX-100 system. *J. Mol. Catal. B Enzym.* 126, 69–75.
- Azizan, N.A.Z., Yuzir, A., Abdullah, N., 2021. Pharmaceutical compounds in anaerobic digestion: A review on the removals and effect to the process performance. *J. Environ. Chem. Eng.* 9 (5), 105926. <https://doi.org/10.1016/j.jece.2021.105926>.
- Ba, S., Haroune, L., Cruz-Morató, C., Jacquet, C., Touahar, I.E., Bellenger, J.-P., Legault, C.Y., Jones, J.P., Cabana, H., 2014a. Synthesis and characterization of combined cross-linked laccase and tyrosinase aggregates transforming acetaminophen as a model phenolic compound in wastewaters. *Sci. Total Environ.* 487, 748–755.
- Ba, S., Jones, J.P., Cabana, H., 2014b. Hybrid bioreactor (HBR) of hollow fiber microfilter membrane and cross-linked laccase aggregates eliminate aromatic pharmaceuticals in wastewaters. *J. Hazard. Mater.* 280, 662–670.
- Balbi, T., Montagna, M., Fabbri, R., Carbone, C., Franzellitti, S., Fabbri, E., Canesi, L., 2018. Diclofenac affects early embryo development in the marine bivalve *Mytilus galloprovincialis*. *Sci. Total Environ.* 642, 601–609.
- Barbosa, M.O., Moreira, N.F.F., Ribeiro, A.R., Pereira, M.F.R., Silva, A.M.T., 2016. Occurrence and removal of organic micropollutants: An overview of the watch list of EU Decision 2015/495. *Water Res.* 94, 257–279.
- Basso, A., Serban, S., 2019. Industrial applications of immobilized enzymes—A review. *Molecular Catal.* 479, 110607. <https://doi.org/10.1016/j.mcat.2019.110607>.
- Becker, D., Rodriguez-Mozaz, S., Insa, S., Schoevaert, R., Barceló, D., de Cazes, M., Belleville, M.-P., Sanchez-Marcano, J., Misovic, A., Oehlmann, J., Wagner, M., 2017. Removal of endocrine disrupting chemicals in wastewater by enzymatic treatment with fungal laccases. *Org. Process Res. Dev.* 21 (4), 480–491.
- Bergé, A., Wiest, L., Baudot, R., Giroud, B., Vulliet, E., 2018. Occurrence of multi-class surfactants in urban wastewater: contribution of a healthcare facility to the pollution transported into the sewerage system. *Environ. Sci. Poll. Res.* 25 (10), 9219–9229.
- Bernardes, M.F.F., Pazin, M., Pereira, L.C., Dorta, D.J., 2015. Impact of pesticides on environmental and human health. Published online, IntechOpen <https://doi.org/10.5772/59710>.
- Bhatt, P., Gangola, S., Bhandari, G., Zhang, W., Maithani, D., Mishra, S., Chen, S., 2021. New insights into the degradation of synthetic pollutants in contaminated environments. *Chemosphere* 268, 128827. <https://doi.org/10.1016/j.chemosphere.2020.128827>.
- Bilal, M., Asgher, M., Iqbal, M., Hu, H., Zhang, X., 2016. Chitosan beads immobilized manganese peroxidase catalytic potential for detoxification and decolorization of textile effluent. *Int. J. Biol. Macromol.* 89, 181–189.
- Bilal, M., Ashraf, S.S., Cui, J., Lou, W.-Y., Franco, M., Mulla, S.I., Iqbal, H.M.N., 2021. Harnessing the biocatalytic attributes and applied perspectives of nanoengineered laccases—A review. *Int. J. Biol. Macromol.* 166, 352–373.
- Bronikowski, A., Hagedoorn, P.-L., Koschorreck, K., Urlacher, V.B., 2017. Expression of a new laccase from *Moniliophthora roreri* at high levels in *Pichia pastoris* and its potential application in micropollutant degradation. *AMB Expr.* 7, 73.
- Champagne, P.-P., Nesheim, M.E., Ramsay, J.A., 2010. Effect of a non-ionic surfactant, Mergol, on dye decolorization of Reactive blue 19 by laccase. *Enzyme. Microb. Technol.* 46 (2), 147–152.
- Chaturvedi, P., Giri, B.S., Shukla, P., Gupta, P., 2021. Recent advancement in remediation of synthetic organic antibiotics from environmental matrices: challenges and perspective. *Bioresour. Technol.* 319, 124161. <https://doi.org/10.1016/j.biortech.2020.124161>.
- Chen, M., Ren, L., Qi, K., Li, Q., Lai, M., Li, Y., Li, X., Wang, Z., 2020. Enhanced removal of pharmaceuticals and personal care products from real municipal wastewater using an electrochemical membrane bioreactor. *Bioresour. Technol.* 311, 123579. <https://doi.org/10.1016/j.biortech.2020.123579>.
- Chhabra, M., Mishra, S., Sreerishnan, T.R., 2009. Laccase/mediator assisted degradation of triarylmethane dyes in a continuous membrane reactor. *J. Biotechnol.* 143 (1), 69–78.
- Chiong, T., Lau, S.Y., Lek, Z.H., Koh, B.Y., Danquah, M.K., 2016. Enzymatic treatment of methyl orange dye in synthetic wastewater by plant-based peroxidase enzymes. *J. Environ. Chem. Eng.* 4 (2), 2500–2509.
- Cobas, M., Danko, A.S., Pazos, M., Sanromán, M.A., 2016. Removal of metal and organic pollutants from wastewater by a sequential selective technique. *Bioresour. Technol.* 213, 2–10.
- Cruz-Morató, C., Ferrando-Climent, L., Rodriguez-Mozaz, S., Barceló, D., Marco-Urrea, E., Vicent, T., Sarrà, M., 2013. Degradation of pharmaceuticals in non-sterile urban wastewater by *Trametes versicolor* in a fluidized bed bioreactor. *Water Res.* 47 (14), 5200–5210.
- Cruz-Morató, C., Lucas, D., Llorca, M., Rodriguez-Mozaz, S., Gorga, M., Petrovic, M., Barceló, D., Vicent, T., Sarrà, M., Marco-Urrea, E., 2014. Hospital wastewater treatment by fungal bioreactor: Removal efficiency for pharmaceuticals and endocrine disruptor compounds. *Sci. Total Environ.* 493, 365–376.
- Deska, M., Kończak, B., 2019. Immobilized fungal laccase as “green catalyst” for the decolorization process – State of the art. *Proc. Biochem.* 84, 112–123.
- Feng, S., Hao Ngo, H., Guo, W., Woong Chang, S., Duc Nguyen, D., Cheng, D., Varjani, S., Lei, Z., Liu, Y., 2021. Roles and applications of enzymes for resistant pollutants removal in wastewater treatment. *Bioresour. Technol.* 335, 125278. <https://doi.org/10.1016/j.biortech.2021.125278>.
- Fernández-Alba, A.R., Guil, L.H., López, G.Díaz, Chisti, Y., 2001. Toxicity of pesticides in wastewater: A comparative assessment of rapid bioassays. *Anal. Chim. Acta* 426 (2), 289–301.
- Gasser, C.A., Yu, L., Svojitka, J., Wintgens, T., Ammann, E.M., Shahgaldian, P., Corvini, P.-X., Hommes, G., 2014. Advanced enzymatic elimination of phenolic contaminants in wastewater: A nano approach at field scale. *Appl. Microbiol. Biotechnol.* 98 (7), 3305–3316.
- Guo, G., Hao, J., Tian, F., Liu, C., Ding, K., Zhang, C., Yang, F., Xu, J., 2020. Decolorization of Metanil Yellow G by a halophilic alkalithermophilic bacterial consortium. *Bioresour. Technol.* 316, 123923. <https://doi.org/10.1016/j.biortech.2020.123923>.
- Hata, T., Shintate, H., Kawai, S., Okamura, H., Nishida, T., 2010. Elimination of carbamazepine by repeated treatment with laccase in the presence of 1-hydroxybenzotriazole. *J. Hazard. Mater.* 181 (1-3), 1175–1178.
- Hou, J., Dong, G., Luu, B., Sengpiel, R.G., Ye, Y., Wessling, M., Chen, V., 2014. Hybrid membrane with TiO₂-based bio-catalytic nanoparticle suspension system for the degradation of bisphenol-A. *Bioresour. Technol.* 169, 475–483.
- Iark, D., Buzzo, A.J.D.R., Garcia, J.A.A., Correa, V.G., Helm, C.V., Corrêa, R.C.G., Peralta, R.A., Peralta Muniz Moreira, R.d.F., Bracht, A., Peralta, R.M., 2019. Enzymatic degradation and detoxification of azo dye Congo red by a new laccase from *Oudemansiella canari*. *Bioresour. Technol.* 289, 121655. <https://doi.org/10.1016/j.biortech.2019.121655>.
- Jiang, W., Li, W., Xiao, F., Wang, D., Wang, Z., 2017. Influence of NOM and SS on the BPA removal via peroxidase catalyzed reactions: kinetics and pathways. *Sep. Pur. Technol.* 173, 244–249.
- Jurado, A., Gago-Ferrero, P., Vázquez-Suné, E., Carrera, J., Pujades, E., Díaz-Cruz, M.S., Barceló, D., 2014. Urban groundwater contamination by residues of UV filters. *J. Hazard. Mater.* 271, 141–149.
- Kaiser, D., Sieratowicz, A., Zielke, H., Oetken, M., Hollert, H., Oehlmann, J., 2012. Ecotoxicological effect characterisation of widely used organic UV filters. *Environ. Pollut.* 163, 84–90.
- Katuri, K.P., Venkata Mohan, S., Sridhar, S., Pati, B.R., Sarma, P.N., 2009. Laccase-membrane reactors for decolorization of an acid azo dye in aqueous phase: process optimization. *Water Res.* 43 (15), 3647–3658.
- Kelbert, M., Pereira, C.S., Daronch, N.A., Cesca, K., Michels, C., de Oliveira, D., Soares, H. M., 2021. Laccase as an efficacious approach to remove anticancer drugs: A study of doxorubicin degradation, kinetic parameters, and toxicity assessment. *J. Hazard. Mater.* 409, 124520. <https://doi.org/10.1016/j.jhazmat.2020.124520>.

- Köck-Schulmeyer, M., Villagrasa, M., López de Alda, M., Céspedes-Sánchez, R., Ventura, F., Barceló, D., 2013. Occurrence and behavior of pesticides in wastewater treatment plants and their environmental impact. *Sci. Total Environ.* 458–460, 466–476.
- Kumar, G.N., Srikumar, K., 2012. Characterization of xerophilic thermophilic laccase exhibiting metal ion-dependent dye decolorization potential. *Appl. Biochem. Biotechnol.* 167 (3), 662–676.
- Kumar, V.V., Cabana, H., 2016. Towards high potential magnetic biocatalysts for on-demand elimination of pharmaceuticals. *Bioresour. Technol.* 200, 81–89.
- Kumar, V.V., Sathyaselvabala, V., Premkumar, M.P., Vidyadevi, T., Sivanesan, S., 2012. Biochemical characterization of three phase partitioned laccase and its application in decolorization and degradation of synthetic dyes. *J. Mol. Catal. B Enzym.* 74 (1–2), 63–72.
- Ladole, M.R., Pokale, P.B., Patil, S.S., Belokar, P.G., Pandit, A.B., 2020. Laccase immobilized peroxidase mimicking magnetic metal organic frameworks for industrial dye degradation. *Bioresour. Technol.* 317, 124035. <https://doi.org/10.1016/j.biortech.2020.124035>.
- Lassouane, F., Ait-Amar, H., Amrani, S., Rodriguez-Couto, S., 2019. A promising laccase immobilization approach for Bisphenol A removal from aqueous solutions. *Bioresour. Technol.* 271, 360–367.
- Lellis, B., Fávoro-Polonio, C.Z., Zani, C., Pamphile, J.A., Polonio, J.C., 2019. Effects of textile dyes on health and the environment and bioremediation potential of living organisms. *Biotechnol. Res. Innov.* 3, 275–290.
- Lezzi, C., Blevé, G., Spagnolo, S., Perrotta, C., Grieco, F., 2012. Production of recombinant *Agaricus bisporus* tyrosinase in *Saccharomyces cerevisiae* cells. *J. Ind. Microbiol. Biotechnol.* 39, 1875–1880.
- Li, X., He, Q., Li, H., Gao, X., Hu, M., Li, S., Zhai, Q., Jiang, Y., Wang, X., 2017. Bioconversion of non-steroidal anti-inflammatory drugs diclofenac and naproxen by chloroperoxidase. *Biochem. Eng. J.* 120, 7–16.
- Li, X., Xu, Y., Goh, K., Chong, T.H., Wang, R., 2020. Layer-by-layer assembly based low pressure biocatalytic nanofiltration membranes for micropollutants removal. *J. Memb. Sci.* 615, 118514. <https://doi.org/10.1016/j.memsci.2020.118514>.
- Liney, K.E., Hagger, J.A., Tyler, C.R., Depledge, M.H., Galloway, T.S., Jobling, S., 2006. Health effects in fish of long-term exposure to effluents from wastewater treatment works. *Environ. Health Perspect.* 114 (Suppl 1), 81–89.
- Liney, K.E., Jobling, S., Shears, J.A., Simpson, P., Tyler, C.R., 2005. Assessing the sensitivity of different life stages for sexual disruption in roach (*Rutilus rutilus*) exposed to effluents from wastewater treatment works. *Environ. Health Perspect.* 113 (10), 1299–1307.
- Liu, Q., 2020. Pollution and treatment of dye waste-water. *IOP Conf. Ser. Earth Environ. Sci.* 514, 052001.
- Liu, Y., Liu, Z., Zeng, G., Chen, M., Jiang, Y., Shao, B., Li, Z., Liu, Y., 2018. Effect of surfactants on the interaction of phenol with laccase: molecular docking and molecular dynamics simulation studies. *J. Hazard. Mater.* 357, 10–18.
- Lloret, L., Eibes, G., Feijoo, G., Moreira, M.T., Lema, J.M., 2012a. Continuous operation of a fluidized bed reactor for the removal of estrogens by immobilized laccase on Eupergit supports. *J. Biotechnol.* 162 (4), 404–406.
- Lloret, L., Eibes, G., Feijoo, G., Moreira, M.T., Lema, J.M., 2012b. Degradation of estrogens by laccase from *Myceliophthora thermophila* in fed-batch and enzymatic membrane reactors. *J. Hazard. Mater.* 213–214, 175–183.
- Lonappan, L., Liu, Y., Rouissi, T., Brar, S.K., Verma, M., Surampalli, R.Y., 2018. Adsorptive immobilization of agro-industrially produced crude laccase on various micro-biochars and degradation of diclofenac. *Sci. Total Environ.* 640–641, 1251–1258.
- Lonappan, L., Rouissi, T., Laadila, M.A., Brar, S.K., Hernandez Galan, L., Verma, M., Surampalli, R.Y., 2017. Agro-industrial-produced laccase for degradation of diclofenac and identification of transformation products. *ACS Sustainable Chem. Eng.* 5 (7), 5772–5781.
- López, C., Moreira, M.T., Feijoo, G., Lema, J.M., 2004. Dye decolorization by manganese peroxidase in an enzymatic membrane bioreactor. *Biotechnol. Prog.* 20 (1), 74–81.
- López, C., Moreira, M.T., Feijoo, G., Lema, J.M., 2011. Economic comparison of enzymatic reactors and advanced oxidation processes applied to the degradation of phenol as a model compound. *Biocatal. Biotransform.* 29 (6), 344–353.
- Margot, J., Bennati-Granier, C., Maillard, J., Blánquez, P., Barry, D.A., Holliger, C., 2013. Bacterial versus fungal laccase: potential for micropollutant degradation. *AMB Express* 3 (1), 63. <https://doi.org/10.1186/2191-0855-3-63>.
- Maryskova, M., Linhartova, L., Novotny, V., Rysova, M., Cajthaml, T., Sevcu, A., 2021. Laccase and horseradish peroxidase for green treatment of phenolic micropollutants in real drinking water and wastewater. *Environ. Sci. Poll. Res. Published online*, <https://doi.org/10.1007/s11356-021-12910-0>.
- Mashhadi, N., Taylor, K.E., Jimenez, N., Varghese, S.T., Levi, Y., Lonergan, C., Lebeau, E., Lamé, M., Lard, E., Biswas, N., 2019. Removal of selected pharmaceuticals and personal care products from wastewater using soybean peroxidase. *Environ. Manage.* 63 (3), 408–415.
- Masjoudi, M., Golgoli, M., Ghabadi Nejad, Z., Sadeghzadeh, S., Borghei, S.M., 2021. Pharmaceuticals removal by immobilized laccase on polyvinylidene fluoride nanocomposite with multi-walled carbon nanotubes. *Chemosphere* 263, 128043. <https://doi.org/10.1016/j.chemosphere.2020.128043>.
- Melo, C.F., Dezotti, M., Marques, M.R.C., 2016. A comparison between the oxidation with laccase and horseradish peroxidase for triclosan conversion. *Environ. Technol.* 37 (3), 335–343.
- Mendes, S., Farinha, A., Ramos, C.G., Leitão, J.H., Viegas, C.A., Martins, L.O., 2011. Synergistic action of azoreductase and laccase leads to maximal decolorization and detoxification of model dye-containing wastewaters. *Bioresour. Technol.* 102 (21), 9852–9859.
- Mendoza, L., Jonstrup, M., Hatti-Kaul, R., Mattiasson, B.O., 2011. Azo dye decolorization by a laccase/mediator system in a membrane reactor: enzyme and mediator reusability. *Enzyme Microb. Technol.* 49 (5), 478–484.
- Meng, Y., Luan, F., Yuan, H., Chen, X., Li, X., 2017. Enhancing anaerobic digestion performance of crude lipid in food waste by enzymatic pretreatment. *Bioresour. Technol.* 224, 48–55.
- Minguez, L., Farcy, E., Ballandonne, C., Lepailler, A., Serpentine, A., Lebel, J.-M., Bureau, R., Halm-Lemeille, M.-P., 2014. Acute toxicity of 8 antidepressants: What are their modes of action? *Chemosphere* 108, 314–319.
- Morsi, R., Bilal, M., Iqbal, H.M.N., Ashraf, S.S., 2020. Laccases and peroxidases: the smart, greener and futuristic biocatalytic tools to mitigate recalcitrant emerging pollutants. *Sci. Total Environ.* 714, 136572. <https://doi.org/10.1016/j.scitotenv.2020.136572>.
- Motamedi, E., Kavousi, K., Sadeghian Motahar, S.F., Reza Ghaffari, M., Sheykh Abdollahzadeh Mamaghani, A., Hosseini Salekdeh, G., Ariaeenejad, S., 2021. Efficient removal of various textile dyes from wastewater by novel thermohalotolerant laccase. *Bioresour. Technol.* 337, 125468. <https://doi.org/10.1016/j.biortech.2021.125468>.
- Münze, R., Hannemann, C., Orlinskiy, P., Gunold, R., Paschke, A., Foit, K., Becker, J., Kaske, O., Paulsson, E., Peterson, M., Jernstedt, H., Kreuger, J., Schüürmann, G., Liess, M., 2017. Pesticides from wastewater treatment plant effluents affect invertebrate communities. *Sci. Total Environ.* 599–600, 387–399.
- Na, S.-Y., Lee, Y., 2017. Elimination of trace organic contaminants during enhanced wastewater treatment with horseradish peroxidase/hydrogenperoxide (HRP/H₂O₂) catalytic process. *Catal. Today* 282, 86–94.
- Naghdi, M., Taheran, M., Brar, S.K., Kermanshahpour, A., Verma, M., Surampalli, R.Y., 2016. Immobilized laccase on oxygen functionalized nanobiochars through mineral acids treatment for removal of carbamazepine. *Bioresour. Technol.* 210, 108–116.
- Nelson, A.A., Anne, F.T., 2021. A novel acid-stable intracellular laccase from *Aureobasidium pullulans*: purification, characterization and application in the removal of Bisphenol A from solutions. *Biocatal. Agricultural Biotechnol.* 33, 101966. <https://doi.org/10.1016/j.cbab.2021.101966>.
- Nguyen, L.N., van de Merwe, J.P., Hai, F.I., Leusch, F.D.L., Kang, J., Price, W.E., Roddick, F., Magram, S.F., Nghiem, L.D., 2016a. Laccase-syringaldehyde-mediated degradation of trace organic contaminants in an enzymatic membrane reactor: removal efficiency and effluent toxicity. *Bioresour. Technol.* 200, 477–484.
- Nguyen, L.N., Hai, F.I., Dosseto, A., Richardson, C., Price, W.E., Nghiem, L.D., 2016b. Continuous adsorption and biotransformation of micropollutants by granular activated carbon-bound laccase in a packed-bed enzyme reactor. *Bioresour. Technol.* 210, 108–116.
- Nguyen, L.N., Hai, F.I., Price, W.E., Leusch, F.D.L., Roddick, F., McAdam, E.J., Magram, S.F., Nghiem, L.D., 2014. Continuous biotransformation of bisphenol A and diclofenac by laccase in an enzymatic membrane reactor. *Int. Biodegrad. Biodegrad.* 95, 25–32.
- Nicolucci, C., Rossi, S., Menale, C., Godjevargova, T., Ivanov, Y., Bianco, M., Mita, L., Bencivenga, U., Mita, D.G., Diano, N., 2011. Biodegradation of bisphenols with immobilized laccase or tyrosinase on polyacrylonitrile beads. *Biodegradation* 22 (3), 673–683.
- Ölçüçü, G., Klaus, O., Jaeger, K.-E., Drepper, T., Krauss, U., 2021. Emerging solutions in vivo biocatalyst immobilization: Tailor-made catalysts for industrial biocatalysis. *ACS Sustain. Chem. Eng.* 9 (27), 8919–8945.
- Onaizi, S.A., 2021. Statistical analyses of the effect of rhamnolipid biosurfactant addition on the enzymatic removal of Bisphenol A from wastewater. *Biocatal. Agricultural. Biotechnol.* 32, 101929. <https://doi.org/10.1016/j.cbab.2021.101929>.
- Onaizi, S.A., Alshahab, M., 2021. The degradation of bisphenol A by laccase: effect of biosurfactant addition on the reaction kinetics under various conditions. *Sep. Pur. Technol.* 257, 117785. <https://doi.org/10.1016/j.seppur.2020.117785>.
- Pereira, C.S., Kelbert, M., Daronch, N.A., Michels, C., de Oliveira, D., Soares, H.M., 2020. Potential of enzymatic process as an innovative technology to remove anticancer drugs in wastewater. *Appl. Microbiol. Biotechnol.* 104 (1), 23–31.
- Primožič, M., Kravanja, G., Knez, Ž., Crnjac, A., Leitgeb, M., 2020. Immobilized laccase in the form of (magnetic) cross-linked enzyme aggregates for sustainable diclofenac (bio)degradation. *J. Cleaner Prod.* 275, 124121. <https://doi.org/10.1016/j.jclepro.2020.124121>.
- Qiu, X., Wang, S., Miao, S., Suo, H., Xu, H., Hu, Y.i., 2021. Co-immobilization of laccase and ABTS onto amino-functionalized ionic liquid-modified magnetic chitosan nanoparticles for pollutants removal. *J. Hazard. Mater.* 401, 123353. <https://doi.org/10.1016/j.jhazmat.2020.123353>.
- Rahmani, H., Lakzian, A., Karimi, A., Halajnia, A., 2020. Efficient removal of 2,4-dinitrophenol from synthetic wastewater and contaminated soil samples using free and immobilized laccases. *J. Environ. Manage.* 256, 109740. <https://doi.org/10.1016/j.jenvman.2019.109740>.
- Ramírez-Cavazos, L.I., Junghanns, C., Ornelas-Soto, N., Cárdenas-Chávez, D.L., Hernández-Luna, C., Demarche, P., Enaud, E., García-Morales, R., Agathos, S.N., Parra, R., 2014. Purification and characterization of two thermostable laccases from *Pycnoporus sanguineus* and potential role in degradation of endocrine disrupting chemicals. *J. Mol. Catal. B Enzym.* 108, 32–42.
- Robinson, P.K., 2015. Enzymes principles and biotechnological applications. *Essays Biochem.* 59, 1–41.
- Rodríguez-Liébana, J.A., ElGouzi, S., Mingorance, M.D., Castillo, A., Peña, A., 2014. Irrigation of a Mediterranean soil under field conditions with urban wastewater: effect on pesticide behaviour. *Agric. Ecosyst. Environ.* 185, 176–185.
- Rogowska, J., Cieszyńska-Semenowicz, M., Ratajczyk, W., Wolska, L., 2020. Micropollutants in treated wastewater. *Ambio* 49 (2), 487–503.

- Sadeghzadeh, S., Nejad, Z.G., Ghasemi, S., Khafaji, M., Borghei, S.M., 2020. Removal of bisphenol A in aqueous solution using magnetic cross-linked laccase aggregates from *Trametes hirsute*. *Bioresour. Technol.* 306, 123169.
- Sathishkumar, P., Chae, J.C., Unnithan, A.R., Palvannan, T., Kim, H.Y., Lee, K.J., Cho, M., Kamala-Kannan, S., Oh, B.T., 2012. Laccase-poly(lactic-co-glycolic acid) (PLGA) nanofiber: highly stable, reusable, and efficacious for the transformation of diclofenac. *Enzym. Microb. Technol.* 51, 113–118.
- Sathishkumar, P., Kamala-Kannan, Cho, S., Kim, J.S., Hadibarata, T., Salim, M.R., Oh, B. T., 2014. Laccase immobilization on cellulose nanofiber: the catalytic efficiency and recycle application for simulated dye effluent treatment. *J. Mol. Catal. B Enzym.* 100, 111–120.
- Schneider, S.L., Lim, H.W., 2019. Review of environmental effects of oxybenzone and other sunscreen active ingredients. *J. Am. Acad. Dermatol.* 80, 266–271.
- Shakerian, F., Zhao, J., Li, S.P., 2020. Recent development in the application of immobilized oxidative enzymes for bioremediation of hazardous micropollutants – A review. *Chemosphere* 23, 124716.
- Sheldon, R.A., Basso, A., Brady, D., 2021. New frontiers in enzyme immobilisation: robust biocatalysts for a circular bio-based economy. *Chem. Soc. Rev.* 50, 5850–5826.
- Shi, L., Ma, F., Han, Y., Zhang, X., Yu, H., 2014. Removal of sulfonamide antibiotics by oriented immobilized laccase on Fe₃O₄ nanoparticles with natural mediators. *J. Hazard. Mater.* 279, 203–211.
- Si, J., Peng, F., Cu, B., 2013. Purification, biochemical characterization and dye decolorization capacity of an alkali-resistant and metal-tolerant laccase from *Trametes pubescens*. *Bioresour. Technol.* 128, 49–57.
- Spina, F., Gea, M., Bichi, C., Cordero, C., Schiliro, T., 2020. Ecofriendly laccases treatment to challenge micropollutants issue in municipal wastewaters. *Environ. Poll.* 257, 113579.
- Stadlmair, L.F., Letzel, T., Drewes, J.E., Grassmann, J., 2018. Enzymes in removal of pharmaceuticals from wastewater: A critical review of challenges, applications and screening methods for their selection. *Chemosphere* 205, 649–661.
- Sukan, A., Sargin, S., 2013. Enzymatic removal of phenol from industrial wastewaters. *J. Biomater. Nanobiotechnol.* 4, 300–307.
- Sun, H., Jin, H., Long, N., Zhang, R., 2017a. Improved biodegradation of synthetic azo dye by horseradish peroxidase cross-linked on nano-composite support. *Int. J. Biol. Macromol.* 95, 1049–1055.
- Sun, K., Huang, Q., Gao, Y., 2016a. Laccase-catalyzed oxidative coupling reaction of triclosan in aqueous solution. *Water Air Soil Poll.* 237, 258–266.
- Sun, K., Kang, F., Waig, M.G., Gao, Y., Huang, Q., 2017b. Laccase-mediated transformation of triclosan in aqueous solution with metal cations and humic acid. *Environ. Poll.* 220, 105–111.
- Sun, K., Luo, Q., Gao, Y., Huang, Q., 2016b. Laccase-catalyzed reactions of 17 β -estradiol in the presence of humic acid: resolved by high-resolution mass spectrometry in combination with ¹³C labelling. *Chemosphere* 145, 394–401.
- Svetozarevic, M., Sekuljica, N., Knezevic-Jugovic, Z., Mijin, D., 2021. Agricultural waste as a source of peroxidase for wastewater treatment: insight in kinetics and process parameters optimization for anthraquinone dye removal. *Environ. Technol. Innov.* 21, 101289.
- Taheran, M., Naghdi, M., Brar, S.K., Knystautas, E.J., Verma, M., Surampalli, R.Y., 2016. Degradation of chlortetracycline using immobilized laccase on polyacrylonitrile-biochar composite nanofibrous membrane. *Sci. Total Environ.* 605–606, 315–321.
- Tiwari, B., Sellamuthu, B., Ouarde, Y., Drogui, P., Tyagi, R.D., Bueln, G., 2017. Review on fate and mechanism of removal of pharmaceutical pollutants from wastewater using biological approach. *Bioresour. Technol.* 224, 1–12.
- Varga, B., Somogyi, V., Meiczinger, M., Kovats, N., Domokos, E., 2019. Enzymatic treatment and subsequent toxicity of organic micropollutants using oxidoreductases - A review. *J. Cleaner Prod.* 221, 306–322.
- Varjani, S., Rakholiya, P., Ng, H.Y., You, S., Teixeira, J.A., 2020. Microbial degradation of dyes: an overview. *Bioresour. Technol.* 314, 123728.
- Vitola, G., Mazzei, R., Giorno, L., 2021. Enzyme-loaded membrane reactor to degrade a pesticide in vegetative waters. *J. Memb. Sci.* 635, 119438.
- Wagner, M., Nicell, J.A., 2002. Impact of dissolved wastewater constituents on peroxidase-catalyzed treatment of phenol. *J. Chem. Technol. Biotechnol.* 77, 419–428.
- Wang, M., Chen, Y., 2018. Generation and characterization of DOM in wastewater treatment processes. *Chemosphere* 201, 96–109.
- Wang, S., Fang, H., Yi, X., Xu, Z., Xie, X., Tang, Q., Ou, M., Xu, X., 2016. Oxidative removal of phenol by HRP-immobilized beads and its environmental toxicology assessment. *Ecotoxicol. Environ. Saf.* 130, 234–239.
- Xia, Q., Kong, D., Liu, G., Huang, Q., Alalewi, A., Lu, J., 2014. Removal of 17 β -estradiol in laccase catalyzed treatment processes. *Front. Environ. Sci. Eng.* 8, 372–378.
- Xiao, K., Abbt-Braun, G., Horn, H., 2016. Changes in the characteristics of dissolved organic matter during sludge treatment: A critical review. *Water Res.* 187, 116441.
- Xu, R., Tang, R., Zhou, Q., Li, F., Zhang, B., 2015. Enhancement of catalytic activity of immobilized laccase for diclofenac biodegradation by carbon nanotubes. *Chem. Eng. J.* 262, 88–95.
- Yadav, D., Ranjan, R., Mchunu, N., Roes-Hill, M.L., Kudang, T., 2021. Enzymatic treatment of phenolic pollutants by a small laccase immobilized on APTES-functionalised magnetic nanoparticles. *3. Biotech* 11, 302.
- Yang, J., Lin, Q., Ng, T.B., Ye, X., Lin, J., 2014. Purification and Characterization of a Novel Laccase from *Cerrena* sp. HYB07 with dye decolorizing ability. *PLOS One* 9, 110834.
- Yang, P., Zhang, T., Lu, J., 2020. Coupling of natural organic matter–metal binding and laccase-catalyzed oxidation of tetrabromobisphenol A. *Environ. Sci. Poll. Res.* 27, 30199–30209.
- Yang, Y., Li, J., Shi, H., Wang, X., Gao, S., 2018. Influence of natural organic matter on horseradish peroxidase-mediated removal of 17 α -ethinylestradiol: role of molecular weight. *J. Hazard. Mater.* 356, 9–16.
- Yanto, D.H.Y., Guntoro, M.A., Nurhayat, O.D., Anita, S.H., Oktaviani, M., Ramadhan, K. P., Pradipta, M.F., Watanabe, T., 2021. Biodegradation and biotransformation of batik dye wastewater by laccase from *Trametes hirsuta* EDN 082 immobilised on light expanded clay aggregate. *3 Biotech* 11, 247.
- Yavas, R., Karagozler, A.A., 2021. Laccase immobilized polyacrylamide-alginate cryogel: A candidate for treatment of effluents. *Proc. Biochem.* 101, 137–146.
- Zdarta, J., Jankowska, K., Wyszowska, M., Kijeńska-Gawrońska, E., Zgola-Grzeskowiak, A., Pinelo, M., Meyer, A.S., Moszyński, D., Jesionowski, T., 2019a. Robust biodegradation of naproxen and diclofenac by laccase immobilized using electrospun nanofibers with enhanced stability and reusability. *Mat. Sci. Eng. C* 103, 109789.
- Zdarta, J., Luong, L.N., Jankowska, K., Jesionowski, T., Nghiem, L.D., 2021. A contemporary review of enzymatic applications in the remediation of emerging estrogenic compounds. *Crit. Rev. Environ. Sci. Technol.* Published online, <https://doi.org/10.1080/10643389.2021.1889283>.
- Zdarta, J., Meyer, A.S., Jesionowski, T., Pinelo, M., 2018a. Developments in support materials for immobilization of oxidoreductases: A comprehensive review. *Adv. Colloid Interface. Sci.* 258, 1–20.
- Zdarta, J., Meyer, A.S., Jesionowski, T., Pinelo, M., 2018b. A general overview of support materials for enzyme immobilization characteristics, properties, practical utility. *Catalysts* 8, 92.
- Zdarta, J., Meyer, A.S., Jesionowski, T., Pinelo, M., 2019b. Multi-faceted strategy based on enzyme immobilization with reactant adsorption and membrane technology for biocatalytic removal of pollutants: A critical review. *Biotechnol. Adv.* 37, 107401.
- Zhang, C., You, S., Liu, Y., Wang, C., Yan, Q., Qi, W., Su, R., He, Z., 2020a. Construction of luffa sponge-based magnetic carbon nanocarriers for laccase immobilization and its application in the removal of bisphenol A. *Bioresour. Technol.* 305, 123085.
- Zhang, H., Luo, J., Woodley, J.M., Wan, Y., 2020b. Confining the motion of enzymes in nanofiltration membrane for efficient and stable removal of micropollutants. *Chem. Eng. J.* 421, 127870.
- Zhang, J., Ding, S., Ge, Y., Li, Z., 2020c. Enhanced removal of crystal violet in water using a facile-fabricated and environmental-friendly laccase immobilized composite membrane. *Proc. Biochem.* 98, 122–130.
- Zuccato, E., Castiglioni, S., Fanelli, R., Reitano, G., Bagnati, R., Chiabrando, C., Pomati, F., Rossetti, C., Calamari, D., 2006. Pharmaceuticals in the environment in Italy: causes, occurrence, effects and control. *Env. Sci. Poll. Res. Int.* 13, 15–21.