



Epoxy Novolac Coating Interactions at High Pressure High Temperature Conditions

Rajagopalan, Narayanan; Weinell, Claus Erik; Dam-Johansen, Kim; Kiil, Søren

Publication date:
2022

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):

Rajagopalan, N., Weinell, C. E., Dam-Johansen, K., & Kiil, S. (2022). *Epoxy Novolac Coating Interactions at High Pressure High Temperature Conditions*. Abstract from Surfaces, Interfaces and Coatings Technologies International conference SICT 2022), Barcelona, Spain.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Epoxy Novolac Coating Interactions at High Pressure High Temperature Conditions

Narayanan Rajagopalan, Claus E. Weinell, Kim Dam-Johansen, Søren Kiil*
CoaST, Chemical Engineering Department, Technical University of Denmark (DTU), Denmark.

*: Corresponding author – email address: sk@kt.dtu.dk

Abstract:

Despite the progress in the usage of renewable resources, the oil and gas industries rely increasingly on wells and reservoirs operating at high pressure and high temperature (HPHT) conditions [1]. Under such conditions, and in the presence of hydrocarbons, seawater, and CO₂, the substrate (steel) corrosion rate increases, along with the risk of mechanical failures. To avoid material degradation at HPHT, process equipment, transportation pipelines, and underground storage tanks are normally coated internally with high performance, epoxy-based coating systems. Owing to the complex and multi-phase situation at HPHT, substrate corrosion and coating degradation cannot, at present, be prevented, and the underlying degradation mechanisms remain more or less unknown.

Using an exclusive three-phase batch reactor that simulate the HPHT conditions [2], this investigation studies the influence of carbon dioxide (CO₂), present in the gas phase at conditions of HPHT, on the degradation and surface interactions of an amine-cured epoxy novolac (EN) coating. In addition, how the hydrocarbon associated surface softening (glass transition temperature depression) allowed the dissolved CO₂ gas to diffuse into the EN network is explained. In what way the synergistic action of CO₂, para-xylene, and seawater resulted in an increased chain motion of the EN network, subsequently allowing CO₂ and seawater ions to diffuse the EN crosslinking to the steel substrate, imposing underfilm corrosion (Figure 1b) is mapped and discussed. Lastly, the rapid gas decompression (RGD), i.e. the depressurization to ambient conditions, and its influence on the deposition of underfilm corrosion products on the coating surface (Figure 1a) is described.

The findings, additionally, have the potential to provide a much-needed supercritical CO₂-resistant epoxy-based candidate to protect transport pipelines for the next-generation carbon capture and storage (CCS) domains.

Keywords: corrosion, glass transition temperature, crosslinking, seawater, hydrocarbons, oil and gas, pipelines, batch reactor.

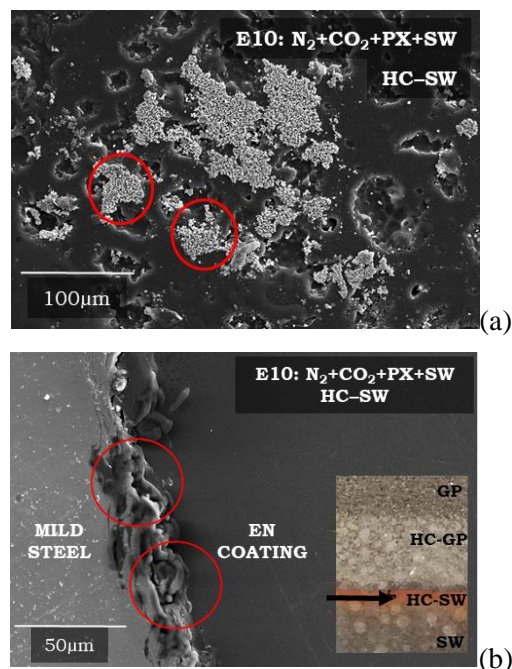


Figure 1: (a) Scanning electron microscopy (SEM) image showing corrosion products (later confirmed as oxides of iron by elemental mapping) deposited on the coating surface (marked with red circles) when exposed to HPHT conditions, and (b) the cross sectional SEM image of the exposed panel displaying corrosion products at the coating-steel interface (marked by red circles). The inset picture shows the area of SEM scan (marked by the black arrow). After [3].

References:

1. Shadravan, A., & Amani, M. (2012, December). HPHT 101-what every engineer or geoscientist should know about high pressure high temperature wells. In SPE Kuwait International Petroleum Conference and Exhibition. OnePetro.
2. Rajagopalan, N., Weinell, C. E., Dam-Johansen, K., & Kiil, S. (2021). Progress in Organic Coatings, 156, 106268.
3. Rajagopalan, N., Weinell, C. E., Dam-Johansen, K., & Kiil, S. (2021). Influence of CO₂ at HPHT Conditions on the Properties and Failures of an Amine-Cured Epoxy Novolac Coating. Industrial & Engineering Chemistry Research, 60(41), 14768-14778.