



2-photon polymerization – benchmarking commercial printers to access the nanometric scale in 3D printing

Cantoni, Federico ; Barbe, Laurent ; Tenje, Maria; Bunea, Ada-Ioana

Publication date:
2022

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Cantoni, F., Barbe, L., Tenje, M., & Bunea, A-I. (2022). 2-photon polymerization – benchmarking commercial printers to access the nanometric scale in 3D printing. Abstract from Swedish Microfluidics in Life Science (SMILS) 2022, Uppsala, Sweden.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

2-photon polymerization – benchmarking commercial printers to access the nanometric scale in 3D printing

Federico Cantoni ^{a,*}, Laurent Barbe ^a, Maria Tenje ^a, Ada-Ioana Bunea ^b

^a Dept Materials Science and Engineering, Science for Life Laboratory, Uppsala University, Uppsala, Sweden

^b National Centre for Nano Fabrication and Characterization (DTU Nanolab), Technical University of Denmark, Kongens Lyngby, 2800 Denmark

*E-mail: federico.cantoni@angstrom.uu.se

Introduction: 3D printing has been implemented as a reliable manufacturing technology in various fields including microfluidics. More recently, two-photon polymerization (2PP) not only allowed the 3D fabrication with resolution and feature size down to nanometric scale, but also opened to a full freedom in sample design [1][2]. The development of new inks and faster printing systems has paved the way to an increasing amount of commercial 2PP printing systems. In this work, the ability of two printers to print high-resolution structures is compared.

Theory and Experimental procedure: A structure was designed to cover different printing features, *i.e.* pillars and holes, placed on solid planes positioned at different angles (**Fig. 1**) to evaluate the minimal achievable feature sizes. The structure was 3D printed by using NanoOne₂₅₀ (UpNano) and the Photonic Professional GT+ (Nanoscribe) in the respective proprietary inks UpBrix and IP-Dip, and characterized using SEM imaging.

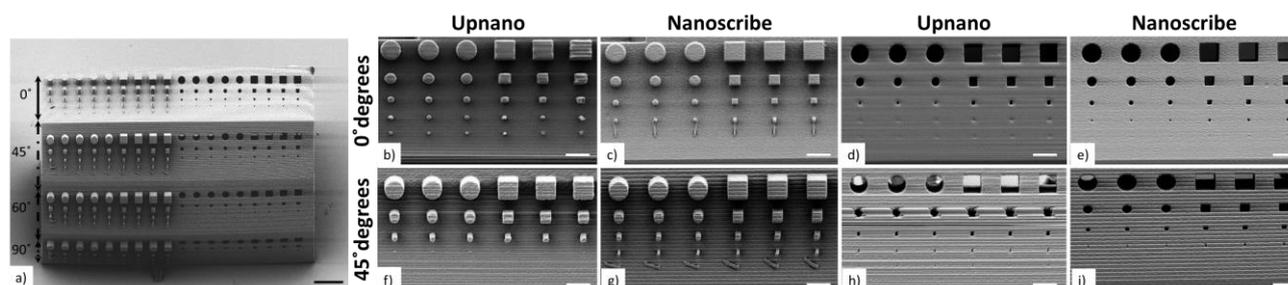


Figure 1: Scanning electron micrographs of the design. a) Overview. Scale bar = 10 µm. b-i) Magnification of the features on the planes. The pillars and holes arrays printed on a 0° degrees plane using the NanoOne₂₅₀ (b and d)) and the Photonic Professional GT+ (c and e)) systems respectively. The pillars and holes arrays printed on a 45° degrees plane using the NanoOne₂₅₀ (f and h)) and the Photonic Professional GT+ (g and i)) systems respectively. Scale bar = 5 µm

Results: For the structure, both printers generally showed a better printing quality for the features on the 0° plane compared to the 45° plane (**Fig. 1**). On the 0° plane, both systems printed all the pillar sizes but just the 0.3 µm pillars obtained with NanoOne₂₅₀ remained upright. For the holes, sizes below 1 µm were clogged for the UpNano system. On the 45° tilted plane, the obtained pillars with the smallest feature were 0.5 µm and 1 µm for Photonic Professional GT+ and NanoOne₂₅₀, respectively. Unexpectedly, the NanoOne₂₅₀ printed all the holes down to 0.3 µm on the tilted plane, while the equivalent holes were clogged on the Photonic Professional GT+. For both planes, Photonic Professional GT+ print showed generally a smoother surface. The NanoOne₂₅₀ printed the structure 1.5 times faster than the Photonic Professional GT+.

Conclusion: Our study is a first attempt to compare commercial two-photon printers to identify advantages and disadvantages in different conditions. The Professional GT+ seemed to result in smoother surfaces compared to the NanoOne₂₅₀, but this advantage came with the drawback of a slower printing. Further AFM investigations will be required to quantify the surface roughness and more designs will be analyzed to identify the strengths and weaknesses of the two systems.

Acknowledgments: This research was funded by the Knut and Alice Wallenberg Foundation (WAF 2016.0112), the European Research Council (ERC-2017-STG-757444) and VILLUM FONDEN, (34424). We acknowledge Myfab Uppsala, funded by the Swedish Research Council, for providing facilities and experimental support.

References

- [1] Y. Lin and J. Xu, "Microstructures Fabricated by Two-Photon Polymerization and Their Remote Manipulation Techniques: Toward 3D Printing of Micromachines," *Adv. Opt. Mater.*,
- [2] A.-I. Bunea, N. Del Castillo Iniesta, A. ; Droumpali, A. E. Wetzel, E. ; Engay, and R. Taboryski, "Micro 3D Printing by Two-Photon Polymerization: Configurations and Parameters for the Nanoscribe System,"