



## **An advanced prototype of a fluorescence-based oil-in-water analyzer**

**Viegas, Isabelle Moraes Amorim; Rinnan, Åsmund; Andersen, Simon Ivar**

*Publication date:*  
2023

*Document Version*  
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*  
Viegas, I. M. Å., Rinnan, Å., & Andersen, S. I. (2023). *An advanced prototype of a fluorescence-based oil-in-water analyzer*. Abstract from Danish Offshore Technology Conference 2023 , Kolding, Denmark.

---

### **General rights**

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

## An advanced prototype of a fluorescence-based oil-in-water analyzer


Isabelle M. A. Viegas<sup>1\*</sup>, Åsmund Rinnan<sup>2</sup>, Simon I. Andersen<sup>1</sup>

<sup>1</sup> Technical University of Denmark, Danish Offshore Technology Centre, Elektrovej 375, 2800, Kgs. Lyngby, Denmark.

<sup>2</sup> University of Copenhagen, Department of Food Science, Rolighedsvej 26, 1958, Frederiksberg C, Denmark.

\*e-mail: iviegas@dtu.dk

The crude oil content in produced water (PW) in the North Sea is regulated by the OSPAR agreement, which establishes 30 mg L<sup>-1</sup> as the maximum concentration of dispersed crude oil. However, it is well-known that the aromatic fraction of crude oil is the biggest environmental concern, as it is toxic and highly soluble in water, which makes it difficult to remove by physical methods before discharge. This gives rise to the importance of in-/online monitoring of crude oil concentrations in PW throughout the cleaning processes, and fluorescence spectroscopy arises in that context as a promising analytical technique as it provides fast or instant measurements and is low-priced and exempt from sample preparation steps. This project aims at using fluorescence spectroscopy together with advanced data analysis tools to develop a commercial sensor to monitor the concentration of crude oil in water in real-time. Our primary target is PW, but the theory and setup of the proposed sensor extend to any application with fluorescent pollutants in water. In the present work, we will share the main features of the second generation of our advanced prototype and present some of the latest results of tests in a flow-loop setup.

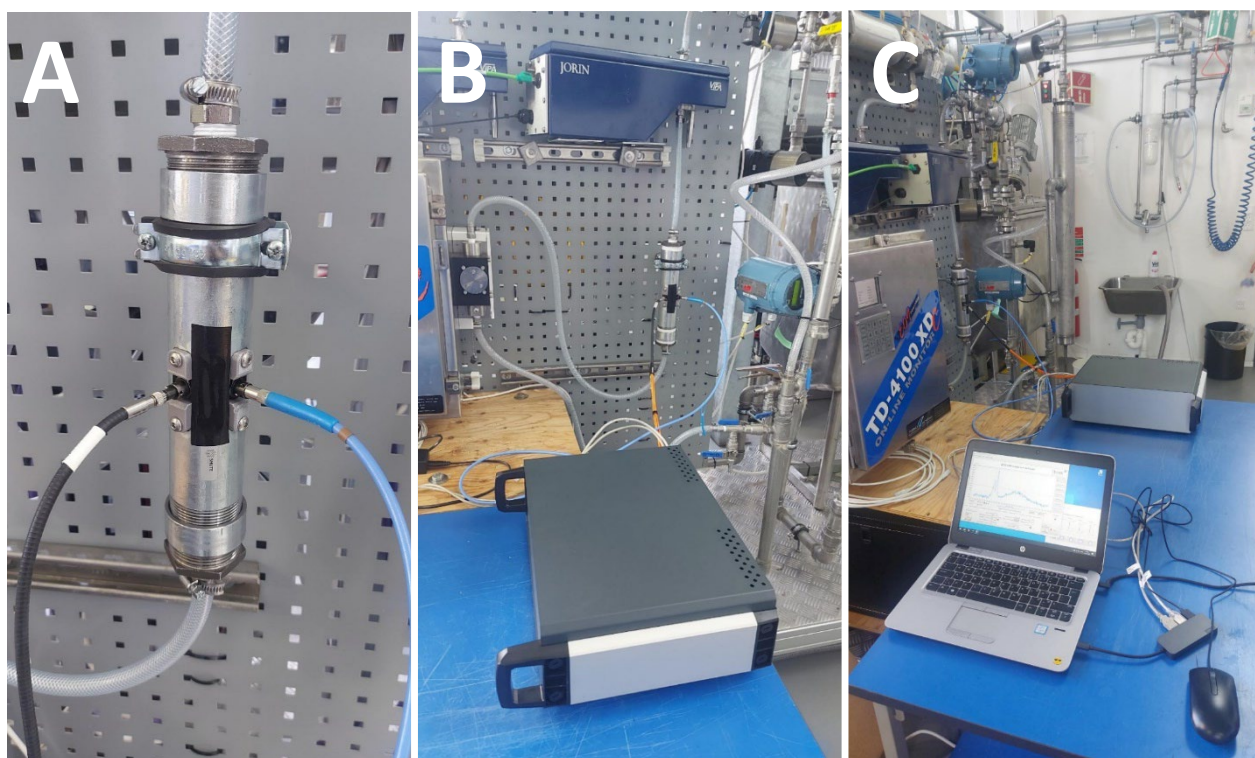

Pictures of **(A)** the first sensor head installed in a flow-loop setup, **(B)** the optical unit (prototype v1), and **(C)** signal recording.