



## Formation of desert rose structures in vacuum plasma sprayed electrodes for alkaline electrolysis

Bentzen, Janet Jonna; Zhang, Wei; Jørgensen, Peter Stanley; Bowen, Jacob R.

*Publication date:*  
2014

[Link back to DTU Orbit](#)

*Citation (APA):*

Bentzen, J. J., Zhang, W., Jørgensen, P. S., & Bowen, J. R. (2014). *Formation of desert rose structures in vacuum plasma sprayed electrodes for alkaline electrolysis*. Abstract from 18th International Microscopy Congress 2014, Prague, Czech Republic.

---

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Type of presentation: N/A

## **Formation of desert rose structures in vacuum plasma sprayed electrodes for alkaline electrolysis**

Bentzen J. J., Zhang W., Jørgensen P. S., Bowen J. R.

Department of Energy Conversion and Storage, Technical University of Denmark, Risø Campus, Roskilde, Denmark

Email of the presenting author: jabe@dtu.dk

The EU FCH-JU REselyser project is concerned with the development of high pressure, high efficiency and low cost alkaline water electrolyzers that can be operated variably and intermittently to meet the demands for integration into energy networks relying on fluctuating renewable energy. The project utilizes NiAlMo alloy electrodes produced at the German Aerospace Center (DLR) by vacuum plasma spraying (VPS). VPS results in a heterogeneous microstructure consisting of a multitude of intermetallic phase sub domains and pores. Prior to electrolysis operation the electrodes are activated by leaching of Al and some Al containing intermetallic phases leaving micrometer pores and nanometer dendritic pores increasing the surface area available for the electrolysis reactions.

The vacuum plasma sprayed electrodes were analyzed by high resolution SEM and TEM before and after electrolysis operation and after storage in water. Analyses of cross sections and electrode surfaces revealed desert rose like nano flake structures on the surface and in the pores on several electrodes. The formation of the desert rose structure appeared to be related to the electrolysis operation as well as the duration of storage in distilled water. The size of the faceted flakes varied from tens of nm to a couple of  $\mu\text{m}$  where the thickness varied from a few nm to  $\sim 50$  nm. The desert rose structure was confirmed by TEM to consist primarily of NiO and  $\text{Al}_2\text{NiO}_4$  like phases (similar lattice parameters). The possible implications for the application and performance of the electrodes are discussed.

Acknowledgement: This work is funded by the European Union's Seventh Framework Programme for the Fuel Cells and Hydrogen Joint Technology Initiative under grant agreement n° [278732] 10.

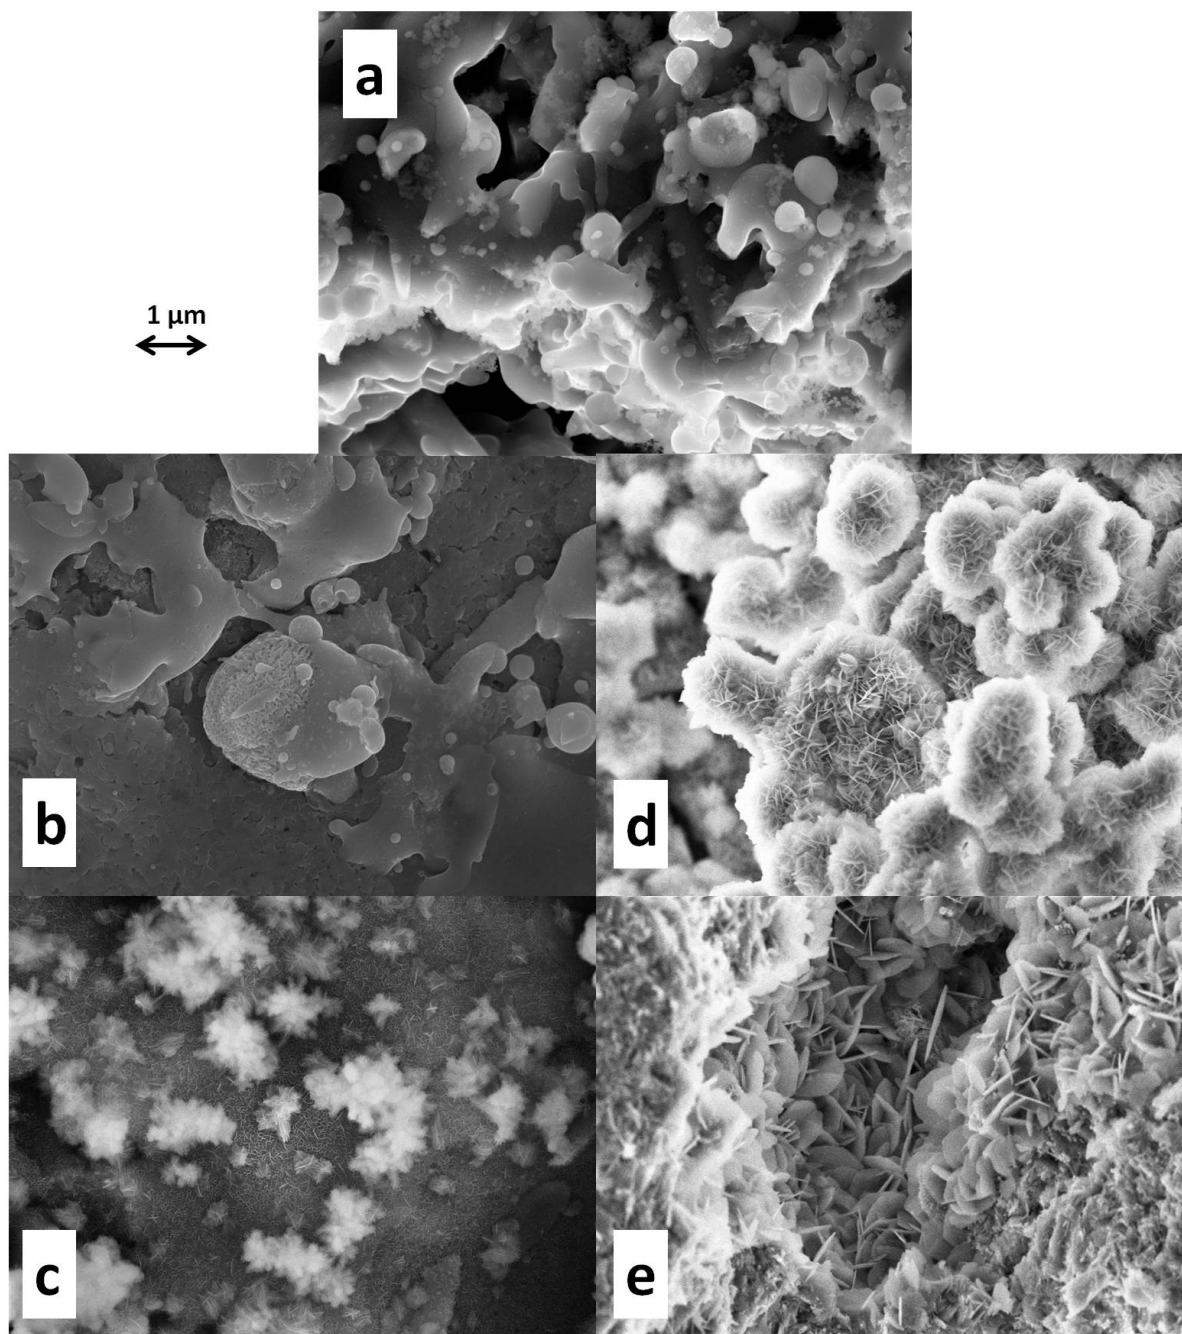


Fig. 1: Formation of desert rose nano flakes on the electrode surface and in pores. SEM images of surface a) as sprayed; b) leached, washed and dried; c) leached, washed and stored in water 3 d; d) leached, washed, stored 120 d in water, and operated as electrode for ~30 min.; e) leached, washed, stored 90 d in water, and operated as electrode for 28 d.