



Wavefront Control by GPC.

Glückstad, Jesper; Bañas, Andrew Rafael; Villangca, Mark Jayson; Palima, Darwin

Publication date:
2015

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Glückstad, J., Bañas, A. R., Villangca, M. J., & Palima, D. (2015). *Wavefront Control by GPC.* Paper presented at Adaptive Optics and Wavefront Control in Microscopy and Ophthalmology, Paris, France.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Wavefront Control by GPC

Jesper Glückstad¹, Andrew Banas², Mark Villangca¹, Darwin Palima¹

¹ DTU Fotonik, Dept. Of Photonics Engineering, DK-2800 Kgs. Lyngby, Denmark

² OptoRobotix ApS, SCION DTU, Diplomvej 381, DK-2800 Kgs. Lyngby, Denmark

jesper.gluckstad@fotonik.dtu.dk www.ppo.dk www.OptoRobotix.com www.GPCphotonics.com

Keywords: Generalized Phase Contrast, Binary Phase Modulation, Wavefront Control

1. GENERALIZED PHASE CONTRAST (GPC)

Sculpting the wavefronts of light in both fixed and programmable shapes has a variety of applications in both research, industry and medicine. With the widespread use of lasers that lend themselves to efficient reshaping due to their high spatial coherence, the versatility of wavefront control is further increased. Therefore, laser beam shaping based on photon-efficient phase-only methods are extensively applied in research such as in advanced adaptive and active microscopy and contemporary optical micro-manipulation [1,2] to mention a few typical uses. Phase-only light shaping and wavefront control is also finding its use in new and exciting applications such as for emerging neurophotonics applications and in fully parallel two-photon optogenetics [3] which applies the most advanced optical tools for exploring neuro-scientific challenges. Beyond the research laboratories, efficient light shaping is also desirable for applications such as laser machining, lithography and future laser-based digital cinemas to name a few. These diverse applications all require light to be shaped in a plurality of ways [4]. For example, the illuminated optical window of spatial light modulators, used for both optics research and consumer display projectors, have a rectangular form factor. A variety of shapes bounded by steep edges and particular point spread functions are desirable in laser cutting and engraving. In two-photon optogenetics [5], it is a key aim to selectively illuminate intricate patterns of dendrites or axons within neurons, preferably with minimal loss of light and maintaining speckle-free light excitations even within turbid media.

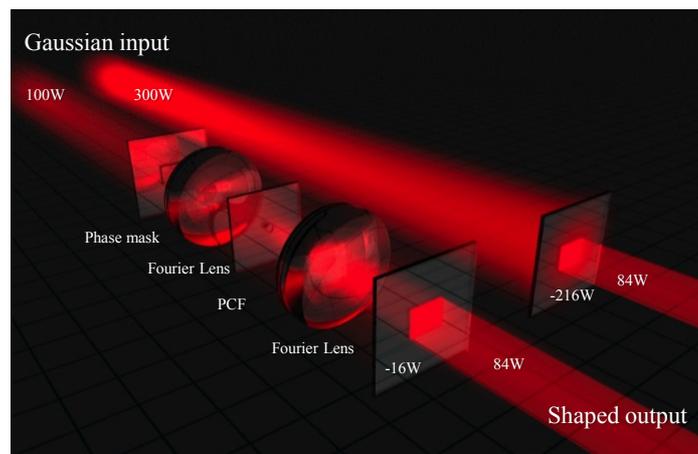


Figure 1: GPC efficiently transforms an incident Gaussian beam into a bright shaped output using only simple binary spatial phase modulation. For comparison an amplitude masking configuration is shown besides a GPC Light Shaper to illustrate the significant difference in energy utilization when aiming for the same shaped output. (Figure adapted from [6])

Laser sources typically exhibit a Gaussian intensity profile. Shaping such a beam with the commonly applied hard truncation is inherently highly inefficient. It is well known that more than two thirds of an incident power will be lost when homogeneously illuminating a rectangular aperture with an expanded Gaussian beam [6-8]. To complicate things, this lost light power will inherently contribute to device heating that can either shorten device lifespan or require additional power for active cooling. Besides the obvious disadvantages of light inefficiency, the high price tag of advanced laser sources, such as femtosecond lasers or supercontinuum sources, used for multi-photon excitation, multi-spectral biophotonics and other state-of-the-art experiments, demands efficient use of the available photons

GPC (for Generalized Phase Contrast) belongs to the class of non-absorbing common-path architectures [9]. A phase-only aperture directly representing the desired output intensity is mapped through the interference of its high and phase-shifted low spatial frequencies. This is achieved by phase shifting the lower spatial frequencies through a binary phase contrast filter (PCF) at the optical Fourier plane (cp. Fig. 1). GPC can thus be implemented with binary phase plates that are inherently simple to mass-produce with standard foundry processes common for silicon devices or microelectronics. The use of a one-to-one mapping geometry in GPC avoids dispersion effects which makes it advantageous for use with multiple wavelengths [10,11], spectrally broad light sources or for temporal focusing which can effectively confine light along the axial direction. Recently GPC also demonstrated its inherent adaptivity for boosting computer holographic reconstructions encoded on reconfigurable spatial light modulators [12].

REFERENCES

- 1) J. Glückstad, "Optical manipulation: sculpting the object", *Nature Photonics*, Vol. 5, 7-8 (2011).
- 2) D. Palima, A. R. Bañas, G. Vizsnyiczai, L. Kelemen, P. Ormos, and J. Glückstad, "Wave-guided optical waveguides," *Opt. Express* 20, 2004–14 (2012).
- 3) E. Papagiakoumou, F. Anselmi, A. Bègue, V. de Sars, J. Glückstad, E. Y. Isacoff, and V. Emiliani, "Scanless two-photon excitation of channelrhodopsin-2," *Nature Methods* 7, 848–854 (2010).
- 4) D. Palima, C. A. Alonzo, P. J. Rodrigo, and J. Glückstad, "Generalized phase contrast matched to Gaussian illumination," *Opt. Express* 15, 11971–7 (2007).
- 5) D. Palima and J. Glückstad, "Gaussian to uniform intensity shaper based on generalized phase contrast," *Opt. Express* 16, 1507–16 (2008).
- 6) A. Bañas, D. Palima, M. Villangca, T. Aabo, and J. Glückstad, "GPC light shaper for speckle-free one- and two- photon contiguous pattern excitation," *Opt. Express* 22, 5299–5310 (2014).
- 7) A. Bañas, O. Kopylov, M. Villangca, D. Palima, and J. Glückstad, "GPC Light Shaper: static and dynamic experimental demonstrations," *Opt. Express* (2014).
- 8) S. Tauro, A. Bañas, D. Palima, and J. Glückstad, "Experimental demonstration of Generalized Phase Contrast based Gaussian beam-shaper," *Opt. Express* 19, 7106–11 (2011).
- 9) J. Glückstad and P. C. Mogensen, "Optimal phase contrast in common-path interferometry.," *Appl. Opt.* 40, 268–82 (2001).
- 10) D. Palima and J. Glückstad, "Multi-wavelength spatial light shaping using generalized phase contrast," *Opt. Express* 16, 1331–42 (2008).
- 11) O. Kopylov, A. Bañas, M. Villangca, and D. Palima, "GPC light shaping a supercontinuum source," *Opt. Express* 23, 1894–1905 (2015).
- 12) M. Villangca, A. Banas, D. Palima, and J. Glückstad, "GPC-enhanced read-out of holograms," *Opt. Comm.* 351, 121-127 (2015).