



Dynamic Modeling of Pectin Extraction for Monitoring and Optimisation

Andersen, Nina M.; Santacoloma, Paloma A.; Gernaey, Krist; Abildskov, Jens; Huusom, Jakob K.

Publication date:
2015

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):

Andersen, N. M., Santacoloma, P. A., Gernaey, K., Abildskov, J., & Huusom, J. K. (2015). *Dynamic Modeling of Pectin Extraction for Monitoring and Optimisation*. Poster session presented at 25th European Symposium on Computer Aided Process Engineering , Copenhagen, Denmark.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Dynamic Modeling of Pectin Extraction for Monitoring and Optimisation



Nina M. Andersen¹, Paloma A. Santacoloma², Krist Germaey¹, Jens Abildskov¹, Jakob K. Huusom¹
¹CAPEC-PROCESS, Department of Chemical and Biochemical Engineering, Technical University of Denmark, 2800 Lyngby, Denmark, ²CP Kelco, 4623 Lille Skensved, Denmark

Introduction

Pectin is used as an additive in many food and pharmaceutical products to modify the rheological properties of the product [1]. Commercial pectin extraction is a batch operation with several tanks that can feed continuously the downstream processing.




The variability of the raw material is a continuous input of uncontrolled disturbances to the process. Consequently, the process conditions should be constantly adjusted in order to obtain a high pectin yield and good product quality. The pectin quality can be characterized by the degree of esterification (%DE) [2].

Measurements of %DE can only be carried out after precipitation, which occurs several hours from the start of extraction. As a consequence, some batches are processed under non-optimal conditions reducing pectin yield and quality.

Model

Pectin is dispersed in the peel as protopectin and is leached by acid hydrolysis as shown in the figure modified from [1]. The mechanisms covered by the model are:


- Acidic hydrolysis of protopectin
- Diffusion of pectin inside the peel
- Mass transport of pectin through the boundary layer to the bulk
- De-esterification of pectin in the bulk

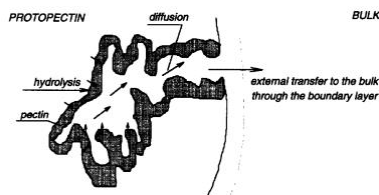

A system of differential equation can be set up that describes the concentrations of pectin inside the peel, protopectin and pectin in the bulk.

Results

The mathematical model of pectin bulk concentration and DE is validated with full-scale measurements for constant temperature and pH as shown in the figures.

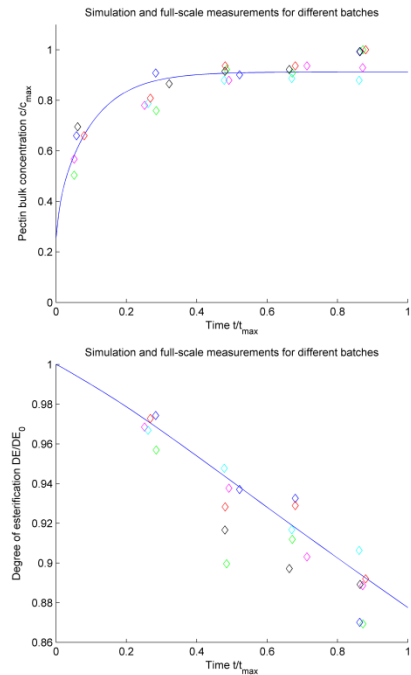

Current Status and Outlook

A mathematical model has been developed that is able to forecast the pectin bulk concentration and DE in full-scale for constant temperature and pH.

In pilot scale the effects of temperature and pH on the reaction kinetics will be studied and incorporated in the model.



References:

- [1] S. Minkov, A. Minchev, K. Paev (1996). Modelling of the Hydrolysis and Extraction of Apple Pectin. Journal of Food Engineering, 29, 107-113
- [2] J. Pagán, A. Ibarz, M. Llorca, L. Coll (1999). Quality of industrial pectin extracted from peach pomace at different pH and temperatures. Journal of the Science of Food and Agriculture, 79, 1038-1042