



Prussian Blue Modified Graphene Enable Multifunctional Electrochemical Application

Zhang, Minwei; Halder, Arnab; Hou, Chengyi; Chi, Qijin

Publication date:
2016

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Zhang, M., Halder, A., Hou, C., & Chi, Q. (2016). *Prussian Blue Modified Graphene Enable Multifunctional Electrochemical Application*. Abstract from 67th Annual Meeting of the International Society of Electrochemistry, The Hague, Netherlands.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Prussian Blue Functionalized Graphene Composites for Electrochemical Sensing and Energy Applications

Minwei Zhang, Arnab Halder, Chengyi Hou and Qijin Chi*

Department of Chemistry, Technical University of Denmark, DK-2800 Kongens Lyngby, Denmark.

(* Corresponding author. E-mail: cq@kemi.dtu.dk)

Abstract: Graphene based nanomaterials have been a hot topic since 2004. These materials have shown some notable advantages, including large surface areas, high flexibility and reasonably good conductivity and mechanical strength, suitable for a wide range of electrochemical applications from sensors to energy technologies. In this presentation, we have explored the combination of redox active *Prussian Blue* (PB) nanostructures (e.g., core-shell Gold@*Prussian Blue* (Au@PB) nanoparticles (NPs) and interlocked PB nanocubes) with chemically exfoliated graphene to prepare multifunctional composites as electrochemical catalysts and supercapacitor electrode materials. Those nanocomposites were systematically characterized by AFM, SEM, TEM and XPS. The results confirmed all PB nanostructures were well combined with graphene nanosheets. Furthermore, PB nanostructure functionalized graphene materials were fabricated into disposable paper sensors and supercapacitor electrodes. For example, Au@PB NPs hybrid graphene oxide suspension was filtered via layer-by-layer into functional GO paper, which was further converted into electrically conductive reduced GO (RGO)/Au@PB paper via hydrazine vapour reduction. The whole procedure is outlined schematically in Fig. 1. Resulting sandwich functionalized graphene papers have sufficient conductivity and flexibility, and robust mechanical strength, which can be cut into free-standing electrodes. Such electrodes with the advantages of low cost and scalable production capacity, for example used as non-enzymatic electrochemical sensors, are of particular interest in the areas of flexible, disposable, simple and low-cost sensors.

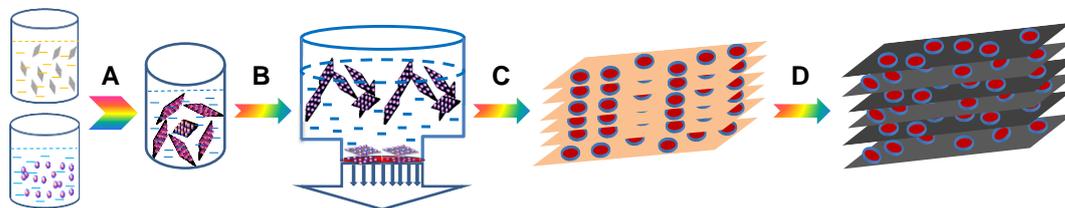


Figure 1. Schematic representation of the experimental procedure for preparation of RGO papers sandwich-like functionalized with Au@PB NPs. The four steps are: the two components are mixed (A), transferred to a vacuum filter (B), vacuum filtration to form GO paper (C) and hydrothermal vapor reduction of GO paper to RGO paper (D).

References

- [1] M. Zhang, A. Halder, C. Hou, J. Ulstrup, Q. Chi. *Bioelectrochemistry*, **2016**, online published, 10.1016/j.bioelechem.2016.02.002.
- [2] M Zhang, C. Hou, A. Halder, J. Ulstrup, Q. Chi. *Biosens. Bioelectron.* **2016**, online published, 10.1016/j.bios.2016.02.044.
- [3] N. Zhu, S. Han, S. Gan, J. Ulstrup, Q. Chi. *Adv. Funct. Mater.* **2013**, *23*, 5297-5306.
- [4] S. Gan and Q. Chi et al. *Adv. Mater.* **2012**, *24*, 3958-3964.

Acknowledgements

This work was supported by the DFF-FTP (Danish Research Council for Technology and Product Science) (Project No. 12-127447). M.Z. acknowledges a CSC PhD scholarship (201306170047). C.H. is grateful for a Ørsted-Marie-Curie cofunded postdoc fellowship.