



Tunable Surface Properties of a Conductive PEDOT/EVAL blend

Pizzi, Elisa; Martinelli, Andrea ; D'Ilario, Lucio; Hvilsted, Søren; Daugaard, Anders Egede

Publication date:
2014

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):

Pizzi, E., Martinelli, A., D'Ilario, L., Hvilsted, S., & Daugaard, A. E. (2014). *Tunable Surface Properties of a Conductive PEDOT/EVAL blend*. Abstract from Fifth Young European Scientists Workshop, Cracow, Poland.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Tunable Surface Properties of a Conductive PEDOT/EVAL blend


Elisa Pizzi², Andrea Martinelli², Lucio D'Ilario², Søren Hvilsted¹, Anders E. Daugaard¹

¹Department of Chemical and Biochemical Engineering, Technical University of Denmark, Denmark. ²Department of Chemistry, Sapienza University of Rome, Italy

Conductive polymers have been studied extensively during recent years. Especially, poly(3,4-ethylenedioxythiophene) (PEDOT) have found many application areas and are broadly considered one of the most promising conductive polymers. In order to broaden the application field of PEDOT we have developed an azide functional poly(3,4-ethylenedioxythiophene) (PEDOT-N₃)¹. The azide functional conductive polymer can be postpolymerization functionalized to introduce a large range of molecules onto the conductive backbone through click chemistry².

Here we present a study of the incorporation of poly(ethylene-co-vinyl alcohol) (EVAL) into a copolymer of EDOT and EDOT-N₃ (poly(EDOT-co-EDOT-N₃)). Poly(ethylene-co-vinyl alcohol) (EVAL) is known to swell in polar solvents, which was exploited in this study to permit a good blending of the two polymers. Since both polymers have residual functional groups the polymer blend permits post-functionalization through either the alcohols from EVAL or the azides from EDOT-N₃ (as shown in Scheme 1 below). In addition to this, the influence of the EVAL incorporation on the mechanical properties is tested.

The presented procedure is a simple and easy way to prepare functional PEDOT(N₃) with a substantially improved mechanical stability. The increase in mechanical stability together with high functionality broadens the possible applications of PEDOT as the mechanical stability of the polymer is of critical importance in many applications.

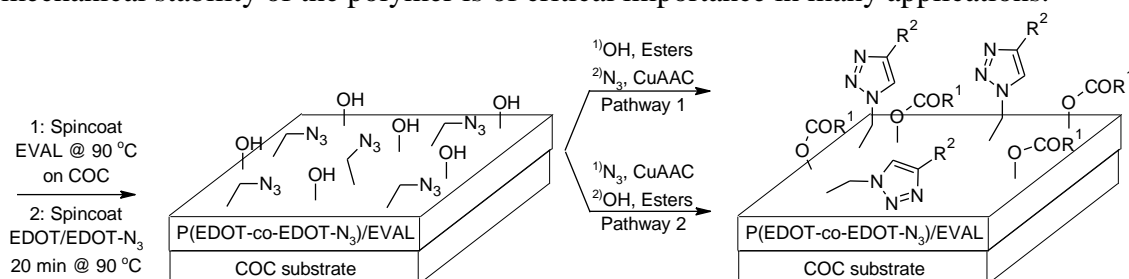

Scheme 1: Synthesis of reinforced PEDOT through a two step application procedure.

Acknowledgement.

The Danish Council for Independent Research, Technology and Production Sciences Grant no: 11-105986 is thanked for financial support.

References

1. Daugaard, A.E., Hansen, T.S., Larsen, N.B., Hvilsted, S. *Macromolecules* 2008, 41, 4321–4327.
2. ^{a)}Daugaard, A.E., Hansen, T.S., Larsen, N.B., Hvilsted, S. *Synth. Met.* 2011, 161, 812–816. ^{b)}Hansen, T.S., Daugaard, A.E., Hvilsted, S., Larsen, N.B. *Adv. Mater.* 2009, 21, 4483–4486. ^{c)}Hansen, T.S., Lind, J.U., Daugaard, A.E., Hvilsted, S., Andresen, T.L., Larsen, N.B. *Langmuir* 2010, 26, 16171–7. ^{d)}Lind, J.U., Acikgöz, C., Daugaard, A.E., Andresen, T.L., Hvilsted, S., Textor, M., Larsen, N.B. *Langmuir* 2012, 28, 6502–11.