



Highly Interactive Surfaces on Impregnated electrodes - an in operando Raman Spectroscopy Study

Traulsen, Marie Lund; Walker, Robert ; Holtappels, Peter

Publication date:
2016

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):

Traulsen, M. L., Walker, R., & Holtappels, P. (2016). *Highly Interactive Surfaces on Impregnated electrodes - an in operando Raman Spectroscopy Study*. Abstract from Electrochemical Science and Technology Conference 2016, Nyborg, Denmark.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.



HIGHLY INTERACTIVE SURFACES ON IMPREGNATED ELECTRODES - AN *IN OPERANDO* RAMAN SPECTROSCOPY STUDY

Marie Lund Traulsen¹, Rob Walker², Peter Holtappels³

¹*DTU Energy, Denmark, matr@dtu.dk*, ²*Montana State University, USA, rawalker@chemistry.montana.edu*, ³*DTU Energy, Denmark, peho@dtu.dk*

Solid oxide electrodes have found application in solid oxide cells for energy conversion, i.e. for conversion of fuel into electricity (fuel cells) and for conversion of excess electricity into fuel (electrolysis cells). Furthermore solid oxide cells are applied in electrocatalytic removal of pollutants (NO_x and hydrocarbons) from diesel engine exhaust.

Improved performance may be obtained if solid oxide electrodes are prepared by impregnation, either of the entire electrode phase or of specific electrocatalysts into the electrode structure. However, the reasons underlying performance enhancement is often not well-understood.

Electrocatalytic reduction of NO_x on lanthanum strontium manganite (LSM) electrodes is increased, if the electrodes are impregnated by BaO. To investigate the origin of this performance enhancement, *in operando* Raman spectroscopy studies were performed with samples at 300-500 °C in 1000 ppm NO and 0.1 atm O₂ with balance Ar, while the electrodes were subjected to ± 1V.

Results from the spectroscopy revealed a highly interactive electrode surface, with the surface composition being strongly dependent on both the atmosphere and the applied potential. The implications of these observations for electrocatalytic removal of NO_x and for impregnated electrodes in general will be discussed. In addition, a short overview of current *in operando* Raman activities at DTU Energy will be given.

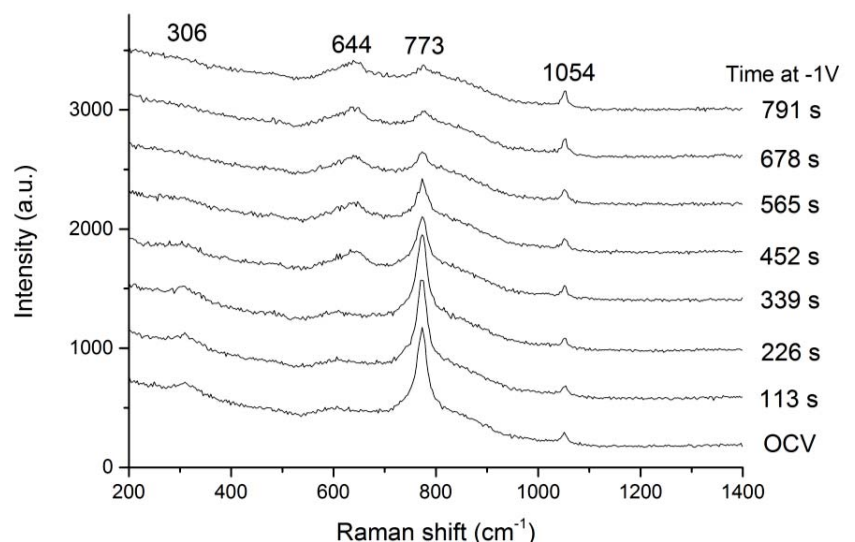


Figure 1. Raman spectra recorded on BaO impregnated LSM electrode in 0.1 atm O₂ at 300 °C