



Integrated graphene based modulators enabled by interfacing plasmonic slot and silicon waveguides

Xiao, Sanshui

Publication date:
2017

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Xiao, S. (2017). *Integrated graphene based modulators enabled by interfacing plasmonic slot and silicon waveguides*. Abstract from International Symposium On Plasmonics and Nano-photonics 2017, Dalian, China.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Integrated graphene based modulators enabled by interfacing plasmonic slot and silicon waveguides

*Sanshui Xiao**

DTU Fotonik, Department of Photonics Engineering, Center for Nanostructured Graphene, Technical University of Denmark, 2800, Kgs. Lyngby, Denmark.

*Email address: saxi@fotonik.dtu.dk

Graphene has offered a new paradigm for extremely fast and active optoelectronic devices due to its unique electronic and optical properties [1]. With the combination of high-index dielectric waveguides/resonators, several integrated graphene-based optical modulators have already been demonstrated [2,3]. However, the optical modes in these systems are inherently strongly localized in the high-index materials, thus jeopardizing light-graphene interactions.

Surface plasmon polaritons have been shown the ability to manipulate light in the nanoscale, while at the same time giving possibility to direct more optical energy to the material interface where graphene could reside. We propose and demonstrate efficient graphene plasmonic waveguide electro-optical modulators, which are fully integrated with the silicon-on-insulator platform. We experimentally achieve the tunability of 0.13 dB/ μm for the graphene plasmonic modulator [4], which exceeds the performance of previously reported graphene-plasmonic modulators.

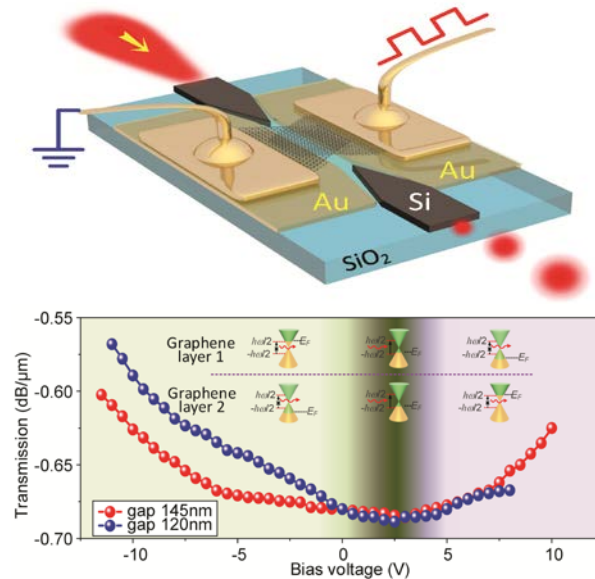


Figure 1. Upper: 3D schematic of the graphene plasmonic waveguide modulator. Down: Modulated transmission for 20 μm -long graphene plasmonic hybrid slot waveguides.

References:

1. Liu, M.; Yin, X.B.; Ulin-Avila, E.; Geng, B.S.; et al, *Nature*, **2011**, 474, 64.
2. Phare, C.T.; Lee, Y.H.D.; Cardenas, J.; and Lipson, M., *Nature Photon.* **2015**, 9, 511.
3. Ding, Y.; Zhu, X.; Xiao, S; Hu, H.; et. al., *Nano Lett.*, **2015**, 15, 4393.
4. Ding, Y.; Guan, X.; Zhu, X.; Hu, H.; et. al, *arXiv:1610.05352*.