



## **Nitrous oxide Production in Membrane-aerated Nitrifying Biofilms: Experimentation and Modelling**

**Ma, Yunjie; Domingo-Felez, Carlos; Smets, Barth F.**

*Publication date:*  
2017

*Document Version*  
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*  
Ma, Y., Domingo-Felez, C., & Smets, B. F. (2017). *Nitrous oxide Production in Membrane-aerated Nitrifying Biofilms: Experimentation and Modelling*. Abstract from Frontiers International Conference on Wastewater Treatment (FICWTM2017), Palermo, Italy.

---

### **General rights**

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.



## Nitrous oxide Production in Membrane-aerated Nitrifying Biofilms: Experimentation and Modelling

Y. Ma, C. Domingo-Félez, B. F. Smets

Department of Environmental Engineering, Technical University of Denmark, Kongens Lyngby 2800 Denmark  
(Emails: [yuma@env.dtu.dk](mailto:yuma@env.dtu.dk); [cadf@env.dtu.dk](mailto:cadf@env.dtu.dk); [bfsm@env.dtu.dk](mailto:bfsm@env.dtu.dk))

Counter-diffusion biofilms; N<sub>2</sub>O production; Nitrifying process

### Summary

- N<sub>2</sub>O emission including both bulk and gas phase is measured in counter-diffusion nitrifying biofilms under various operation conditions.
- Heterotrophs could be key contributors to N<sub>2</sub>O production within counter-diffusion biofilms, even considering only the carbon source released from hydrolysis of decay products.
- A 1-D multispecies nitrifying biofilm model incorporating pH calculation and N<sub>2</sub>O production/consumption pathway description was developed and calibrated.
- An in-depth understanding of N<sub>2</sub>O production mechanism within counter-diffusion biofilms is studied, furthering the optimization of strategies to minimize its emission.

### Introduction

Membrane-aerated biofilm reactors (MABRs) are excellent candidates to perform autotrophic nitrogen (N) removal process (Terada, Yamamoto, et al., 2006). In MABRs N oxidizing bacteria (ammonium oxidizers, AOB and nitrite oxidizers, NOB) thrive at the base of the biofilm, where oxygen is supplied from the membrane lumen. The other nutrients, including N source etc., are provided from the counter-side bulk phase, thereby flexibly decoupling the oxygen and substrate sources. Aiming at a short-cut ammonium (NH<sub>4</sub><sup>+</sup>) removal or a one-stage nitrification-Anammox process in MABRs, controlling of the aeration regimes is an efficient approach to suppress NOB at the biofilm base and favour the growth of anaerobic ammonium oxidizers (AMX) in the outer anoxic biofilm layers (Pellicer-Nàcher, Sun, et al., 2010). However, the strong spatial gradients of nitrogenous species and oxygen within this counter-diffusion biofilm, especially in a dynamic aeration regime, may promote emissions of nitrogen oxides (N<sub>x</sub>O) (Kampschreur, Tan, et al., 2008) (Ni and Yuan, 2013). Nitrous oxide (N<sub>2</sub>O) and nitric oxide (NO) are atmospheric trace gases, of which N<sub>2</sub>O is known as a greenhouse gas with a warming potential 300 times stronger than carbon dioxide. Therefore, an understanding of the N<sub>2</sub>O production/dynamics in MABR system would be highly valuable for its further application.

Our main objective is to identify N<sub>2</sub>O production mechanism in a lab-scale nitrifying MABR via a model-based exploration. The 1-D multi-species nitrifying biofilm model, incorporating N<sub>2</sub>O production pathway descriptions, will be calibrated and validated with different experimental scenarios.

### Materials and Methods

#### Reactor operation and N<sub>2</sub>O measurement



The lab-scale MABR used PDMS membranes (3100506, Labmarket, Germany) and was inoculated with nitrifier-enriched biomass. Synthetic wastewater with  $\text{NH}_4^+$  or  $\text{NO}_2^-$  was fed to provide various experimental scenarios. Aeration strategies (continuous or intermittent aeration) were switched to observe different reactor performance: continuous aeration was 100% air flowing through in the membrane lumen; intermittent aeration consisted of a 6-hour aeration (100% air) followed by a 6-hour non-aeration (100%  $\text{N}_2$ ). Bulk N species were recorded; bulk DO and pH were monitored.  $\text{N}_2\text{O}$  was measured in the bulk liquid phase and within the biofilm with micro-electrodes, and in the lumen gas phase in each experimental scenario. Furthermore, net volumetric  $\text{N}_2\text{O}$  consumption or production rates were estimated from the respective concentrations profiles by using the Fick's second law of diffusion and Microsoft EXCEL add-ins solver were applied for the calculations as described previously (Lorenzen, Larsen, et al., 1998)

### Modelling description

The multi-species biofilm model developed by Ma and Domingo-Félez, et al. includes microbial growth of AOB, NOB, AMX and heterotrophs and takes into account pH calculations and its effects on biological activities. In this study the model is extended to model processes relevant to  $\text{N}_2\text{O}$  production and consumption. Specifically, AOB related processes (nitrifier nitrification, NN and nitrifier denitrification, ND) are modelled following Domingo-Félez and Smets (2016) whilst denitrification by HB (HD) is modelled as suggested by Hiatt and Grady (2008). Consistent with experimental studies, the biological model considers NO as the direct precursor of  $\text{N}_2\text{O}$  in all three biologically-driven pathways. The model describes all relevant  $\text{N}_2\text{O}$  production pathways with fewer parameters than other biological models, thereby simplifying the calibration process. Transient  $\text{N}_2\text{O}$  accumulation on the aeration/non-aeration switch is modelled by multiplying the maximum process rate with a dynamic function as suggested by Schreiber and Loeffler, et al. (2009).

### Model calibration and validation

In the calibration procedure, the model is fitted to experimental data by estimating a set of significant parameters based on sensitivity analysis. Then the model is subject to validation with reactor performance in other scenarios.

**Table 1** Experimental scenarios in the  $\text{N}_2\text{O}$  model calibration and validation

Model calibration (short-term)	Influent concentrations	Aeration regime
	75 mg/L $\text{NH}_4^+$ + 20 mg/L $\text{NO}_2^-$	Air
	75 mg/L $\text{NH}_4^+$ + 20 mg/L $\text{NO}_2^-$	$\text{N}_2$
Model validation	Influent concentrations	Aeration regime
	75 mg/L $\text{NH}_4^+$	Air or Air/ $\text{N}_2$
	75 mg/L $\text{NH}_4^+$ + 20 mg/L $\text{NO}_2^-$	Air/ $\text{N}_2$
	75 mg/L $\text{NH}_4^+$ + increased buffer	Air or Air/ $\text{N}_2$


### Results and Discussion

In the long-term reactor operation, a nitrifying biofilm readily developed when the MABR was initially operated under continuous aeration:  $\text{NO}_3^-$  was the dominant  $\text{NO}_x^-$ -N species in the

effluent and  $\text{NO}_2^-/\text{NO}_x^-$  was around 5% after 2 months operation, suggesting active NOB activity with continuous aeration (Figure 1). Meanwhile, almost no N loss showed minor AMX activity. Total  $\text{N}_2\text{O}$  emission under continuous aeration was ca. 2.35% of the total N loading, and  $\text{N}_2\text{O}$  in the gas phase which was typically not reported in other counter-diffusion biofilms was comparable to the liquid phase (Table 2). At day 67, MABR was switched to intermittent aeration (6-hour aeration and 6-hour non-aeration), promoting NOB suppression and increased AMX activity, caused the instant absence of  $\text{NO}_2^-$  in the bulk. N loss increased due to activated AMX. Noticeably,  $\text{N}_2\text{O}$  emission decreased to 0.32% of the total N loading.

**Table 2**  $\text{N}_2\text{O}$  emission in the lab-scale MABR under different aeration regimes (R1-R4)

Time (days)	Aeration regime	$\text{N}_2\text{O}$ emission (% of N loading)	
		Bulk phase	Gas phase
R1: 50-67	Air	1.31 ± 0.35	1.23 ± 0.38
R2: 68-95	Air/ $\text{N}_2$	0.01	0.34
R3: 96-143	Air	0.22	0.32
R4: 144-196	Air/ $\text{N}_2$	0.07	0.11

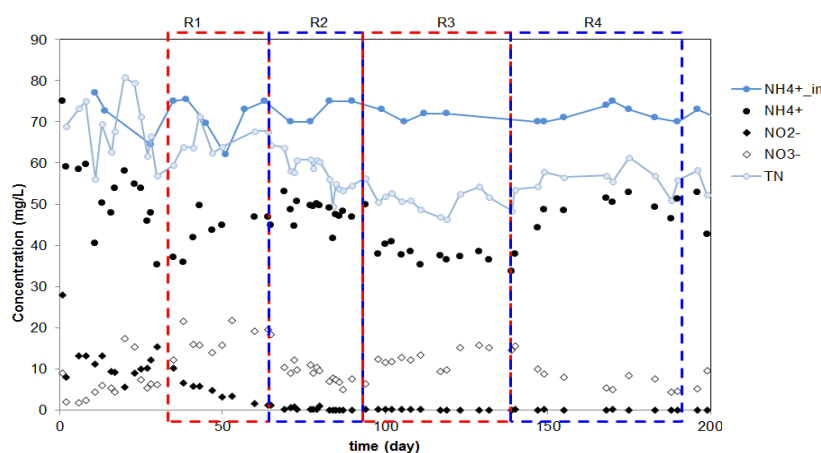


**Figure 1** Long-term MABR performance under different aeration regimes (R1-R4) - Nitrogen concentrations in the bulk. Short-term reactor performances (including relevant microprofiles) are not shown here.

$\text{N}_2\text{O}$  microprofiles within the biofilm were measured under continuous/intermittent aeration regime (Figure 2A). In continuous aeration (R1)  $\text{N}_2\text{O}$  was significantly produced at the biofilm top and bottom; while  $\text{N}_2\text{O}$  was only produced at the biofilm bottom in intermittent aeration (R2) (Figure 2B). It suggested that HD pathway was easily underestimated within counter-diffusion biofilm as reported (Pellicer-Nàcher, Sun, et al., 2010). In the next step, significant parameters in the  $\text{N}_2\text{O}$  biofilm model will be estimated with short-term experimental data, including  $\text{N}_2\text{O}$  microprofiles within the biofilm which were typically not used in other  $\text{N}_2\text{O}$  model calibrations. The calibrated model will be validated with long-term reactor performance and  $\text{N}_2\text{O}$  production. Therefore, the individual contribution of each  $\text{N}_2\text{O}$  production pathway to its total emission can be evaluated; moreover, the significance of intermittent aeration in mitigation  $\text{N}_2\text{O}$  emission in MABRs can be highlighted by comparison to continuous aeration (Figure 2). An in-depth understanding of  $\text{N}_2\text{O}$  production mechanism within counter-diffusion



biofilms is elaborated, thus strategies to minimize its emission in this system can be proposed.

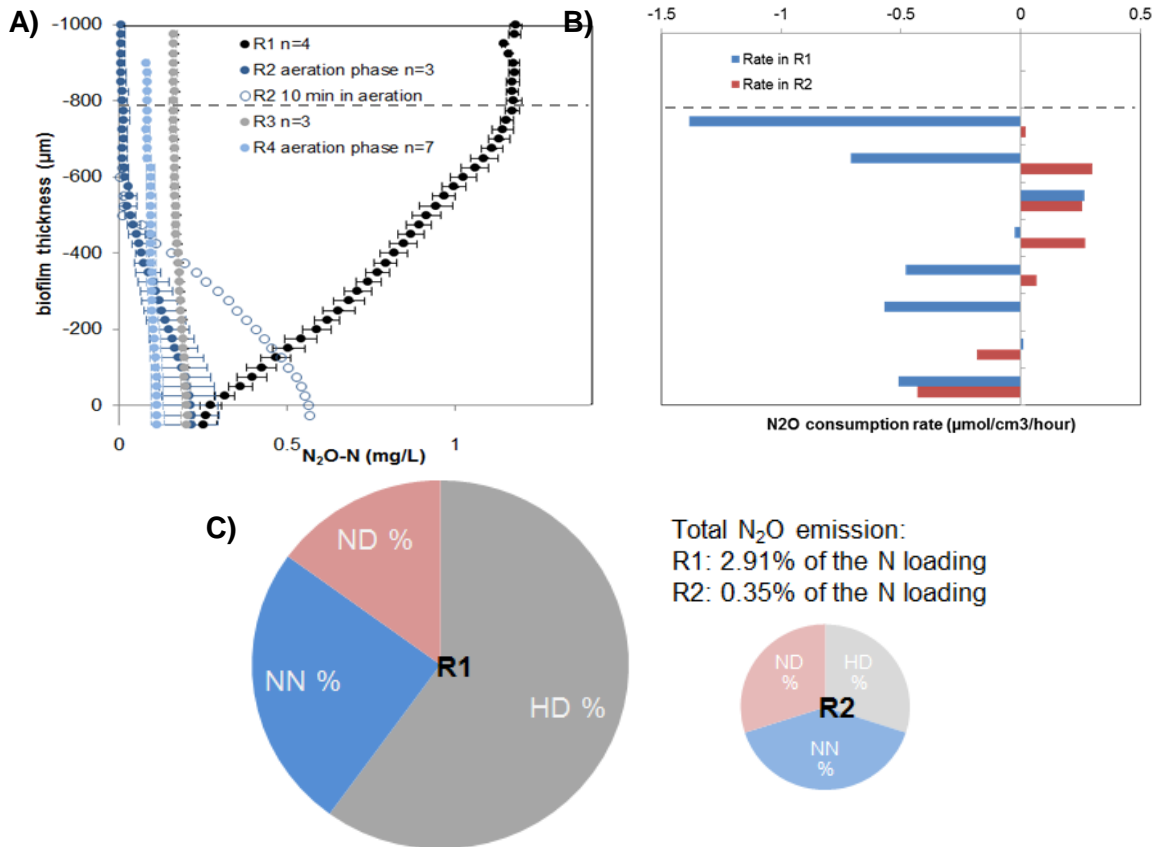

**Figure 2** A) Averaged N<sub>2</sub>O microprofiles within the biofilm; B) Spatial distributions of net volumetric production/consumption rates of N<sub>2</sub>O calculated from the average concentrations profiles in R1 and R2; C) Model-based evaluation of the individual contribution of each N<sub>2</sub>O production pathway to the total N<sub>2</sub>O emission under different aeration regimes (R1-continuous aeration; R2- intermittent aeration)

## Conclusion

In counter-diffusion nitrifying biofilms, N<sub>2</sub>O emission in the gas phase, which was usually underestimated, was comparable to the liquid phase. Heterotrophs could be key contributors to N<sub>2</sub>O production within counter-diffusion biofilms, which should be highlighted even considering only the carbon source released from hydrolysis of decay products. In the calibration of N<sub>2</sub>O biofilm models, performance within the biofilm showed higher sensitivity compared to the bulk performance. Both the experimentation and modelling showed that intermittent aeration was an efficient means to mitigate N<sub>2</sub>O emission in the MABRs.

## Acknowledgement

The authors would like to thank the China Scholarship Council (CSC) for financial support to Yunjie Ma, and the Innovation Fund Denmark (IFD) (Project LaGAS, File No. 0603-00523B) for additional financial support.



## References

- Domingo-Félez, C. and Smets, B. F. (2016) A consilience model to describe N<sub>2</sub>O production during biological N removal. *Environ. Sci.: Water Res. Technol.*, **2**(6), 923–930.
- Hiatt, W. C. and Grady, C. P. L. (2008) An updated process model for carbon oxidation, nitrification, and denitrification. *Water environment research : a research publication of the Water Environment Federation*, **80**, 2145–2156.
- Kampschreur, M. J., Tan, N. C. G., Kleerebezem, R., Picoreanu, C., Jetten, M. S. M., and Loosdrecht, M. C. M. van (2008) Effect of Dynamic Process Conditions on Nitrogen Oxides Emission from a Nitrifying Culture. *Environmental Science & Technology*, **42**(2), 429–435.
- Lorenzen, J., Larsen, L. H., Kjaer, T., and Revsbech, N. (1998) Biosensor Determination of the Microscale Distribution of Nitrate , Nitrate Assimilation , Nitrification , and Denitrification in a Diatom-Inhabited Freshwater Sediment Biosensor Determination of the Microscale Distribution of Nitrate , Nitrate Assimilati. *Appl Environ Microb*, **64**(9), 3264–3269.
- Ma, Y., Domingo-Félez, C., Plósz, B. G., and Smets, B. F. Intermittent aeration suppresses nitrite-oxidizing bacteria in membrane-aerated biofilm reactors : a model-based explanation.
- Ni, B. J. and Yuan, Z. (2013) A model-based assessment of nitric oxide and nitrous oxide production in membrane-aerated autotrophic nitrogen removal biofilm systems. *Journal of Membrane Science*, **428**, 163–171.
- Pellicer-Nàcher, C., Sun, S., Lackner, S., Terada, A., Schreiber, F., Zhou, Q., and Smets, B. F. (2010) Sequential aeration of membrane-aerated biofilm reactors for high-rate autotrophic nitrogen removal: experimental demonstration. *Environmental science & technology*, **44**(19), 7628–34.
- Schreiber, F., Loeffler, B., Polerecky, L., Kuypers, M. M., and de Beer, D. (2009) Mechanisms of transient nitric oxide and nitrous oxide production in a complex biofilm. *The ISME Journal*, **3**(11), 1301–1313.
- Terada, A., Yamamoto, T., Igarashi, R., Tsuneda, S., and Hirata, A. (2006) Feasibility of a membrane-aerated biofilm reactor to achieve controllable nitrification. *Biochemical Engineering Journal*, **28**(2), 123–130.