



Design optimization of jacket structures for mass production

Sandal, Kasper; Verbart, Alexander; Stolpe, Mathias

Publication date:
2016

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):

Sandal, K., Verbart, A., & Stolpe, M. (2016). *Design optimization of jacket structures for mass production*. Poster session presented at 13th Deep Sea Offshore Wind R&D Conference, Trondheim, Norway.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Design optimization of jacket structures for mass production

Kasper Sandal, PhD student, kasp@dtu.dk
Alexander Verbart, Mathias Stolpe.

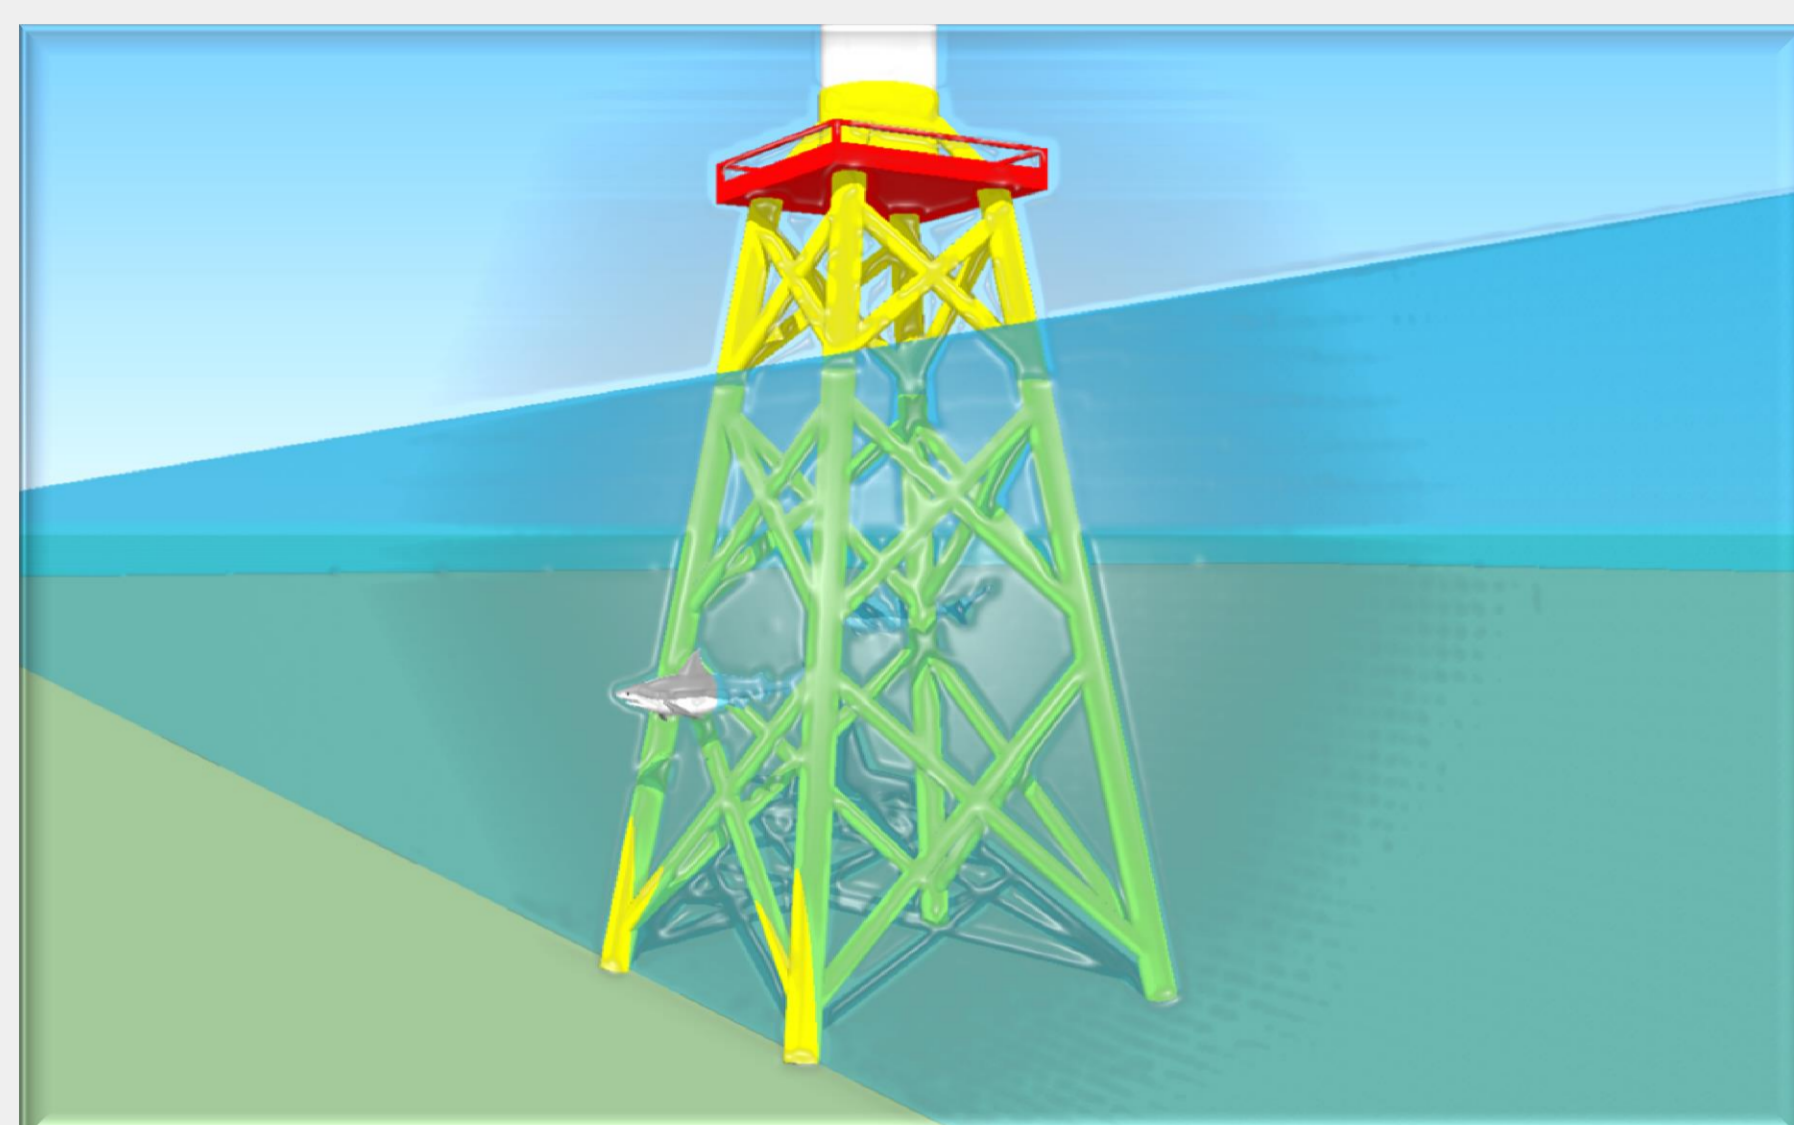


Figure 1: A jacket in its natural environment.

Jacket model

A jacket model is developed in Matlab for the purpose of design optimization, as part of the research project ABYSS

- *Analytic design sensitivities* are the main motivation for an in-house FE-software. With this information, the design can be optimized using gradient-based methods.
- *Timoshenko beam elements* are chosen, as they are great for frame analysis, keeps the problem size small, and the meshing simple.
- Structural response includes *stress* and *natural frequencies*.

Problem formulation

The aim is to minimize the mass of a jacket, subject to some constraints:

$$\begin{array}{ll}
 \text{minimize } f(\mathbf{x}) & \text{Objective} \\
 \mathbf{x} \in \mathbb{R}^{ne}, \mathbf{u} \in \mathbb{R}^{nd} & \\
 \text{subject to } \mathbf{K}(\mathbf{x})\mathbf{u} - \mathbf{P} = \mathbf{0} & \text{State equation} \\
 \underline{\boldsymbol{\sigma}} \leq \boldsymbol{\sigma}(\mathbf{x}) \leq \bar{\boldsymbol{\sigma}} & \text{Stress} \\
 \underline{\boldsymbol{\lambda}} \leq \boldsymbol{\lambda}(\mathbf{x}) \leq \bar{\boldsymbol{\lambda}} & \text{Frequency} \\
 \underline{\mathbf{x}} \leq \mathbf{x} \leq \bar{\mathbf{x}} & \text{Design variables} \\
 \underline{\mathbf{u}} \leq \mathbf{u} \leq \bar{\mathbf{u}} & \text{State variables}
 \end{array}$$

Let the diameter and thickness of the members in the jacket be the design variables \mathbf{x} , and let the displacement vector \mathbf{u} be the state variables. We constrain the state variables to satisfy the state equation, and impose bounds on variables and constraints.

Conclusion

Model, method, and a numerical example of preliminary design optimization of jackets is presented. The method works well, and current research aims to improve the model such that the numerical examples become more realistic.

Summary

This work includes a model and method for very fast preliminary design of jackets. Results indicate that the method works well, and current research aims to improve the model.

Very fast preliminary design

We use the jacket model to optimize the members of the Innwind jacket [1], when subjected only to a static load. The force is a sum of a large thrust force, and the rotor nacelle assembly mass: $\mathbf{P}_T = 2\,970\text{ kN}$ & $\mathbf{P}_M = 6\,760\text{ kN}$.

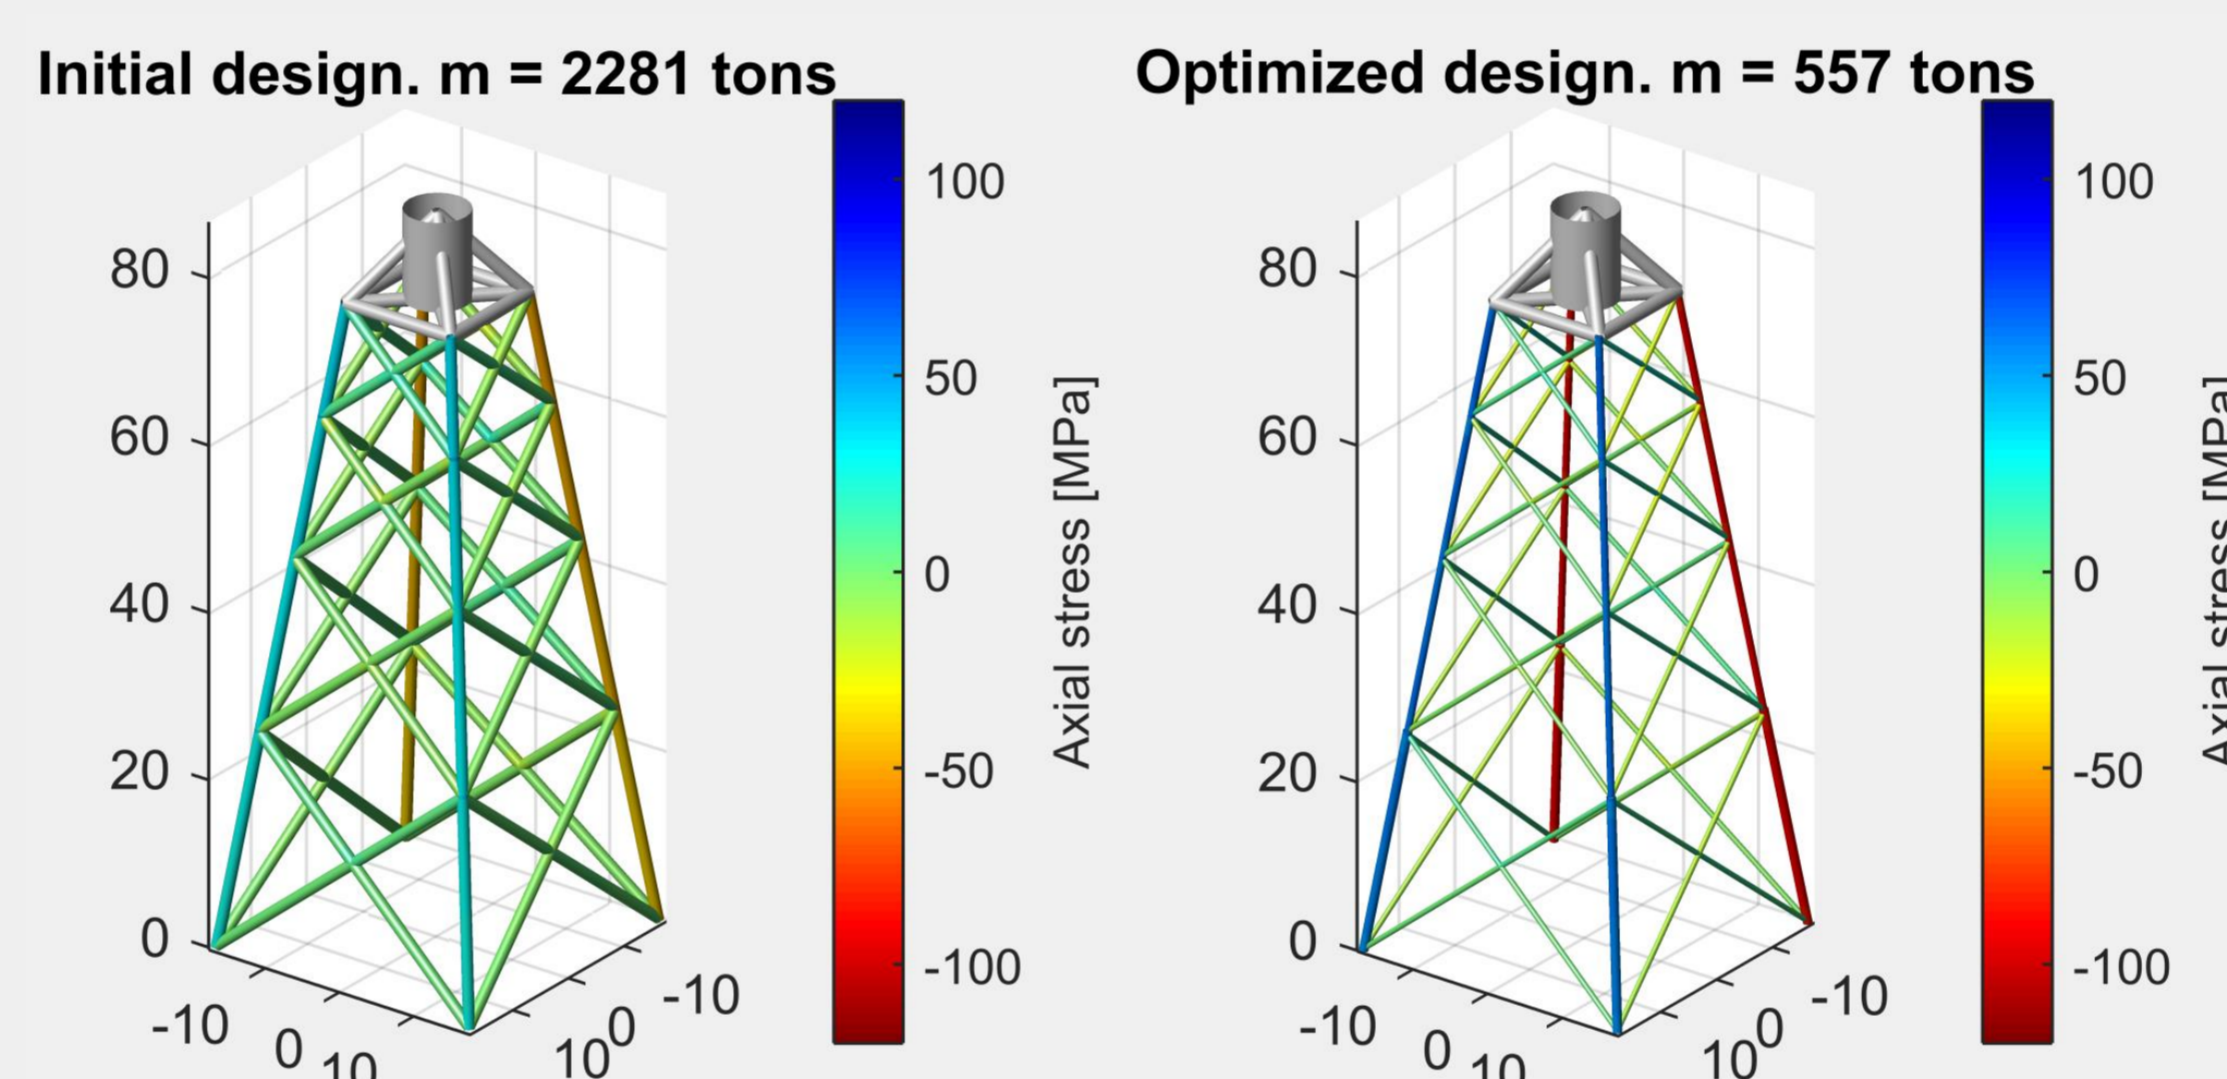


Figure 2: Initial and optimized design.

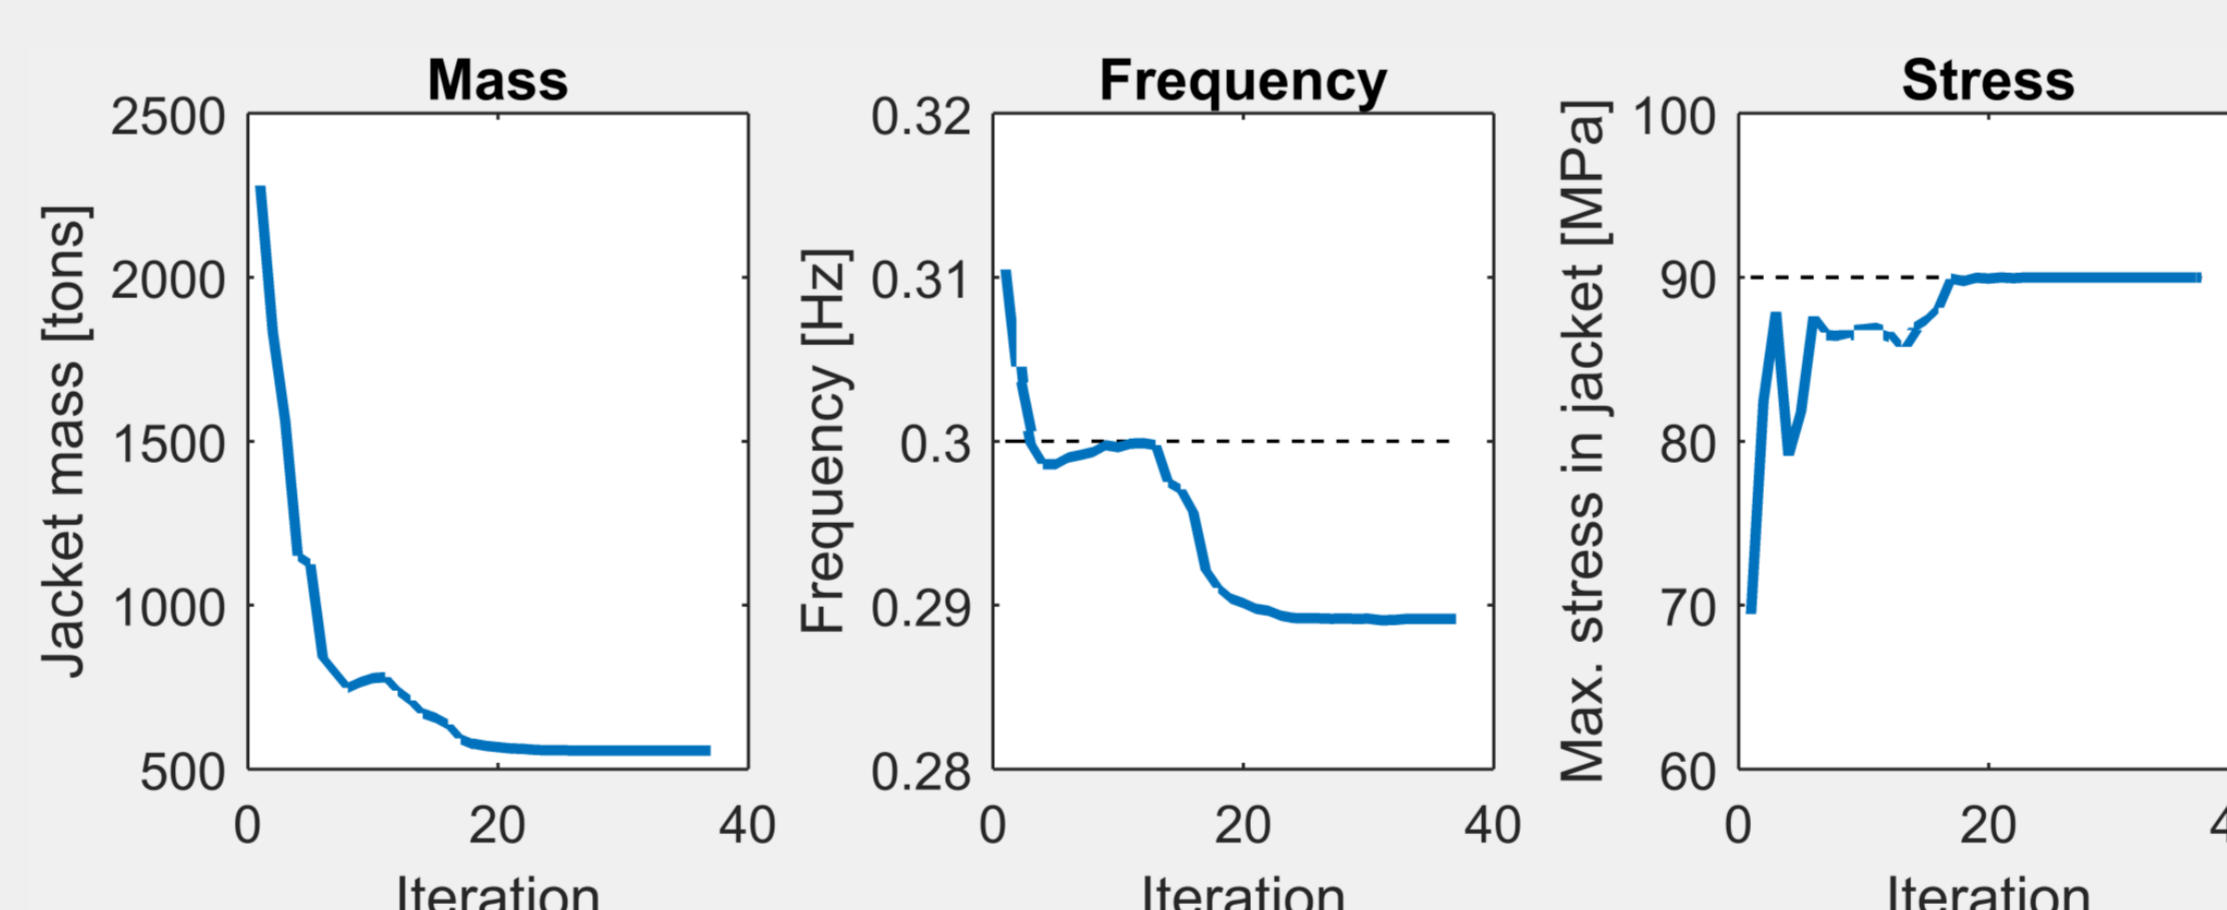


Figure 3: Optimization history. Time: 95 seconds (9.5 in IPOPT [2]) on 2.1 GHz, 8.0 GB RAM.

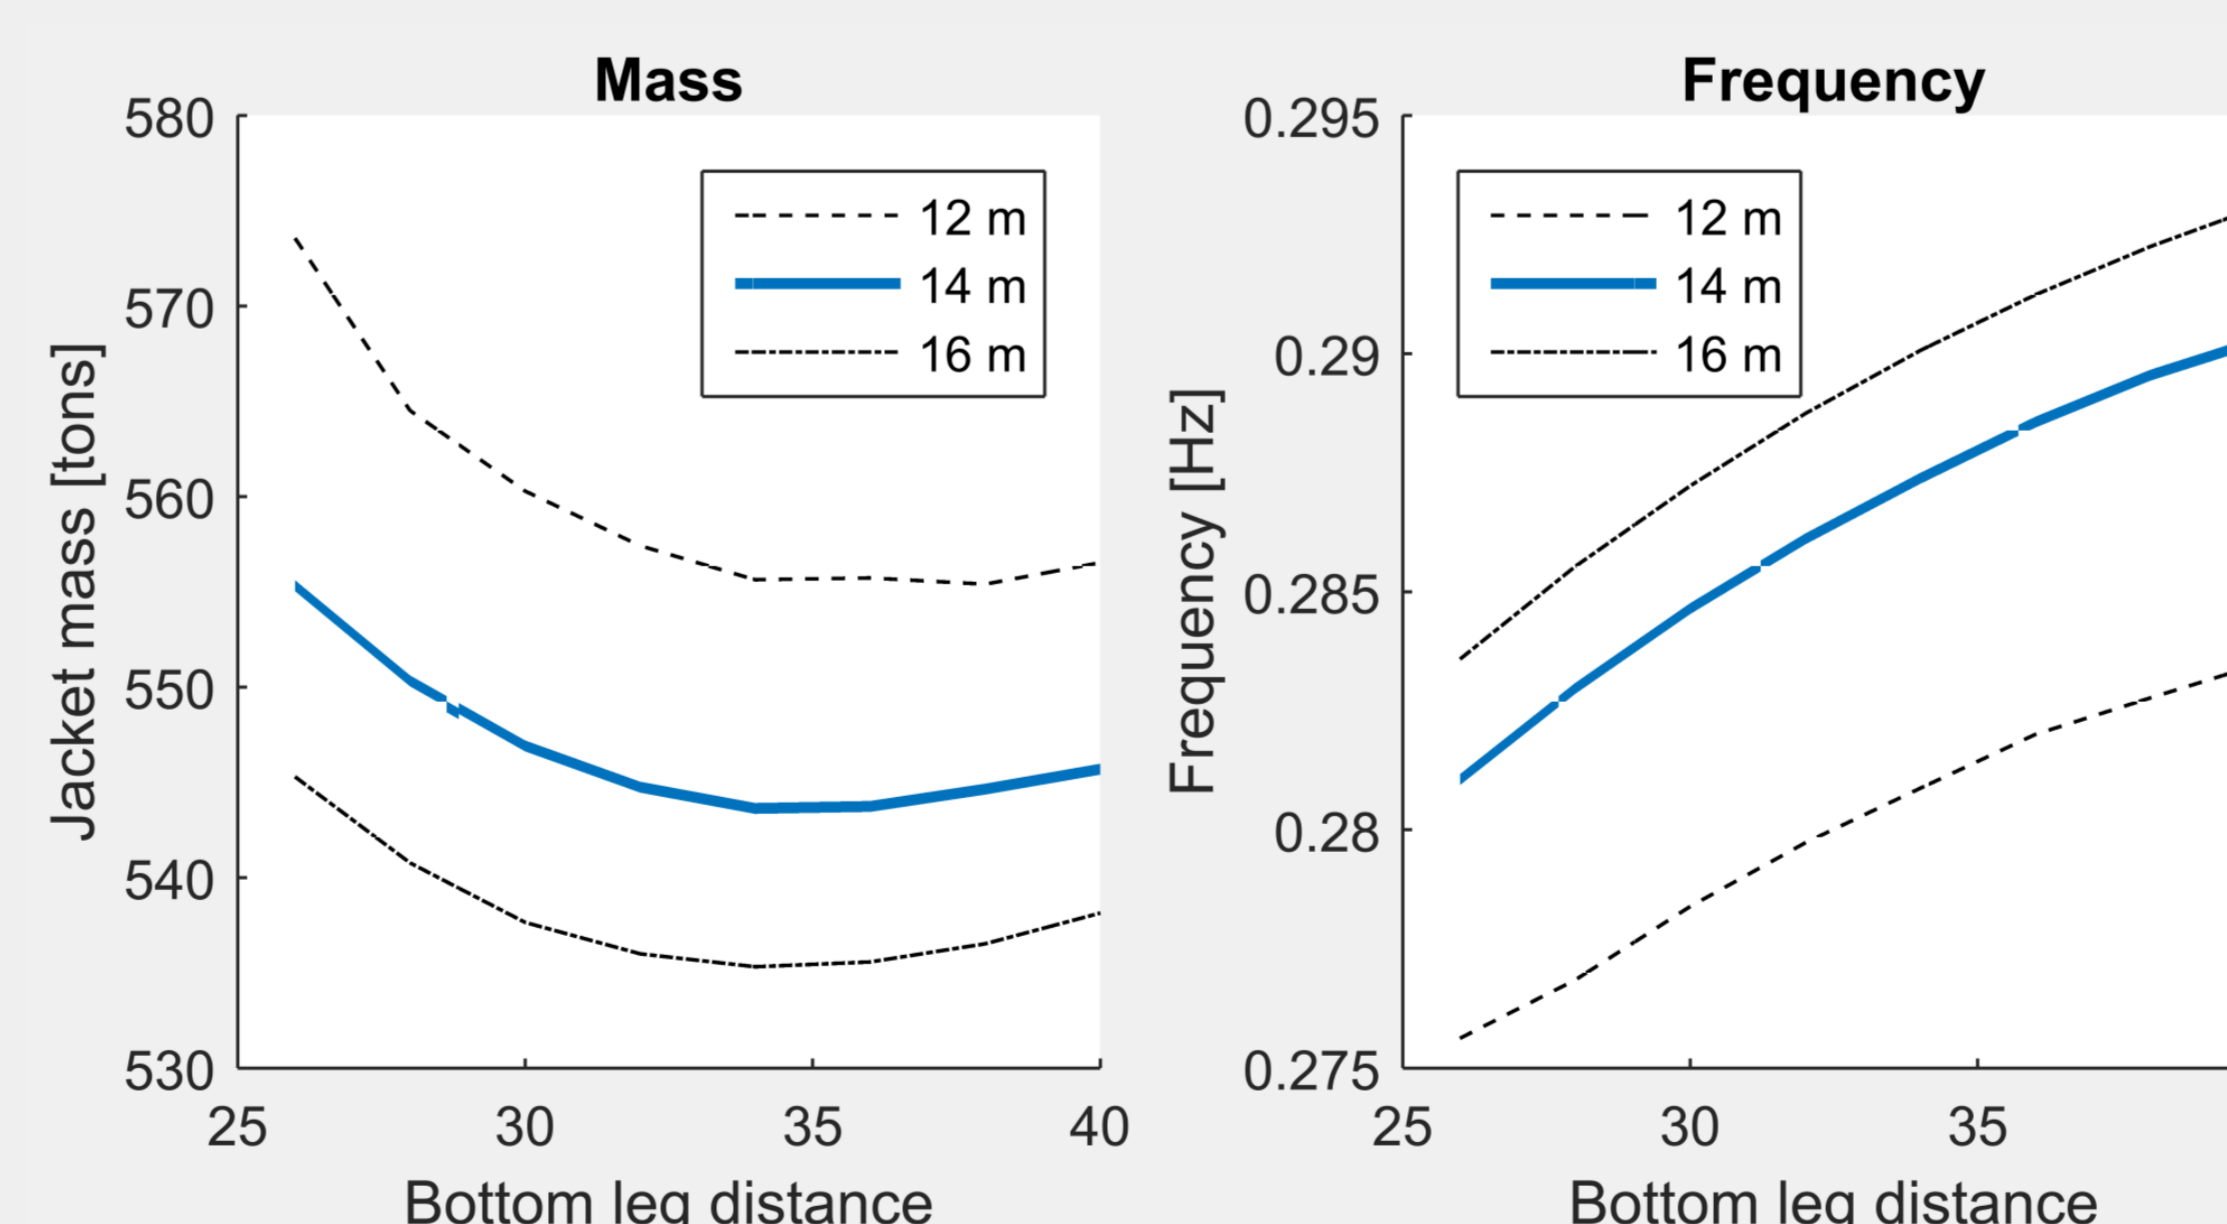


Figure 4: Parameter study on the influence of leg distance.

Table 1: Upper and lower bounds on the constraints.

	Lower bound	Upper bound
Diameter [m]	0.6	2.0
Thickness [mm]	20	100
Stress [MPa]	-90	90
Frequency [Hz]	0.16	0.30
Displacement [m]	-1.25	1.25

Table 2: Optimal diameter and thickness for the legs and braces.

	Sec 1	Sec 2	Sec 3	Sec 4
D Leg [m]	1.04	0.79	0.81	0.85
T Leg [mm]	34	50	51	53
D Brace [m]	0.6	0.6	0.6	0.6
T Brace [mm]	0.2	0.2	0.2	0.2

Parameter study

Let the bottom leg distance of the innwind jacket change from 26 m to 40 m (34 is the original). We then optimize the jacket for each bottom leg distance. In Figure 4, the different lines are different top leg distances.