



Estimating bolt tightness from measured vibrations: Influence of boundary nonlinearity

Sah, Si Mohamed; Thomsen, Jon Juel; Brøns, Marie; Fidlin, Alexander; Tcherniak, Dmitri

Publication date:
2018

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):

Sah, S. M., Thomsen, J. J., Brøns, M., Fidlin, A., & Tcherniak, D. (2018). *Estimating bolt tightness from measured vibrations: Influence of boundary nonlinearity*. Abstract from 10th European Solid Mechanics Conference (ESMC10), Bologna, Italy.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Estimating bolt tightness from measured vibrations: Influence of boundary nonlinearity

Si Mohamed Sah¹, Jon Juel Thomsen¹, Marie Brøns¹, Alexander Fidlin², Dmitri Tcherniak³

¹ Department of Mechanical Engineering, Technical University of Denmark

² Department of Engineering Mechanics, Karlsruhe Institute of Technology, Germany

³ Brüel & Kjær Sound & Vibration Measurement, Denmark

Keywords: bolt tightness, boundary stiffness, boundary damping

A technique is proposed to assess the level of bolt tightness and to quantify the tension based on measured natural frequencies and damping ratios of the bolt. This technique is investigated experimentally and theoretically. A simple model for the bolt that consists of a pre-stressed one-dimensional beam linear equation with nonlinear stiffness and damping at its boundaries is investigated to explain experimental results.

Figure 1a shows the squared first bending natural frequency for a bolt as function of bolt tension. At low tension the squared natural frequency rapidly increases with tension. As the bolt is gradually tightened the frequency starts changing approximately linearly with tension [1, 2]. Figure 1b shows the first mode damping ratio of the bolt as function of the bolt tension. At low tension the damping ratio decreases rapidly with tension and then starts slowly decreasing for higher tension.

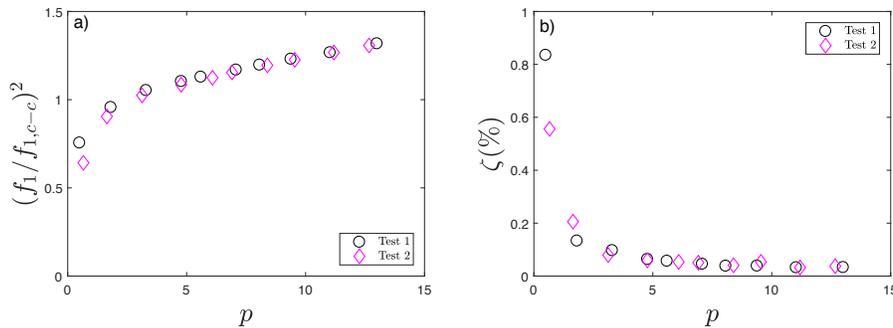


Figure 1: Nondimensional first transverse frequency squared (a) and damping ratio (b) of a bolt M12x260 as function of nondimensional tension.

In reality the boundaries stiffness and damping are expected to be nonlinear functions of bolt's displacement at the local (micro) scale. However analytical results showed that linear boundaries stiffness and damping can explain experimental data. An attempt is made to explain this phenomenon by considering a linear one-dimensional beam model with nonlinear stiffness and damping at its boundaries. These nonlinear boundary effects are then averaged over space and time to yield linear effective boundary stiffness and damping that explain the experimental results.

Acknowledgment This work is financially supported by the Danish Council for Independent Research, grant DFF-6111-00385.

References

- [1] Adams, D.E., Farrar, C.R.: Classifying linear and nonlinear structural damage using frequency domain arx models. *Struct. Health Monit.* 1(2), 185-201 (2002).
- [2] A. Milanese, P. Marzocca, J. Nichols, M. Seaver, S. Trickey, Modeling and detection of joint loosening using outputonly broad-band vibration data. *Struct. Health Monit.* 7, 309-328 (2008).