



Lifetime impact of SO₂-poisoning of a Cu-CHA catalyst for NH₃-SCR

Hammershøi, Peter S.; Janssens, Ton V.W.; Jensen, Anker D.

Publication date:
2018

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):

Hammershøi, P. S., Janssens, T. V. W., & Jensen, A. D. (2018). *Lifetime impact of SO₂-poisoning of a Cu-CHA catalyst for NH₃-SCR*. Poster session presented at The 10th International Conference on Environmental Catalysis, and The 3rd International Symposium on Catalytic Science and Technology in Sustainable Energy and Environment, Tianjin, China.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Lifetime impact of SO₂-poisoning of a Cu-CHA catalyst for NH₃-SCR

Peter S. Hammershøj^{a,b}, Ton V. W. Janssens^b, Anker D. Jensen^{a,*}


^a Department of Chemical Engineering, Technical University of Denmark, Søtofts Plads B229, 2800 Kgs. Lyngby, Denmark

^b Umicore Denmark ApS, Nøjsomhedsvej 20, 2800 Kgs. Lyngby, Denmark

* Corresponding author. Phone: +45 45252841, e-mail: aj@dtu.kt.dk


Background

The highest activity for removal of NO_x (NO and NO₂) in the temperature range 180-250 °C, by selective catalytic reduction (SCR) with NH₃ in the after treatment system of heavy-duty vehicles, is obtained with Cu-zeolite catalysts. Improved fuel efficiency that is necessary for lower CO₂ emissions, has led to colder exhausts, which has increased the importance of efficient NO_x removal in that temperature range. However, Cu-zeolites deactivate by the inevitable presence of SO₂ in diesel exhaust, and therefore, we have investigated if the lifetime impact of SO₂ on the activity of a Cu-CHA zeolite catalyst is prohibitive for practical application.

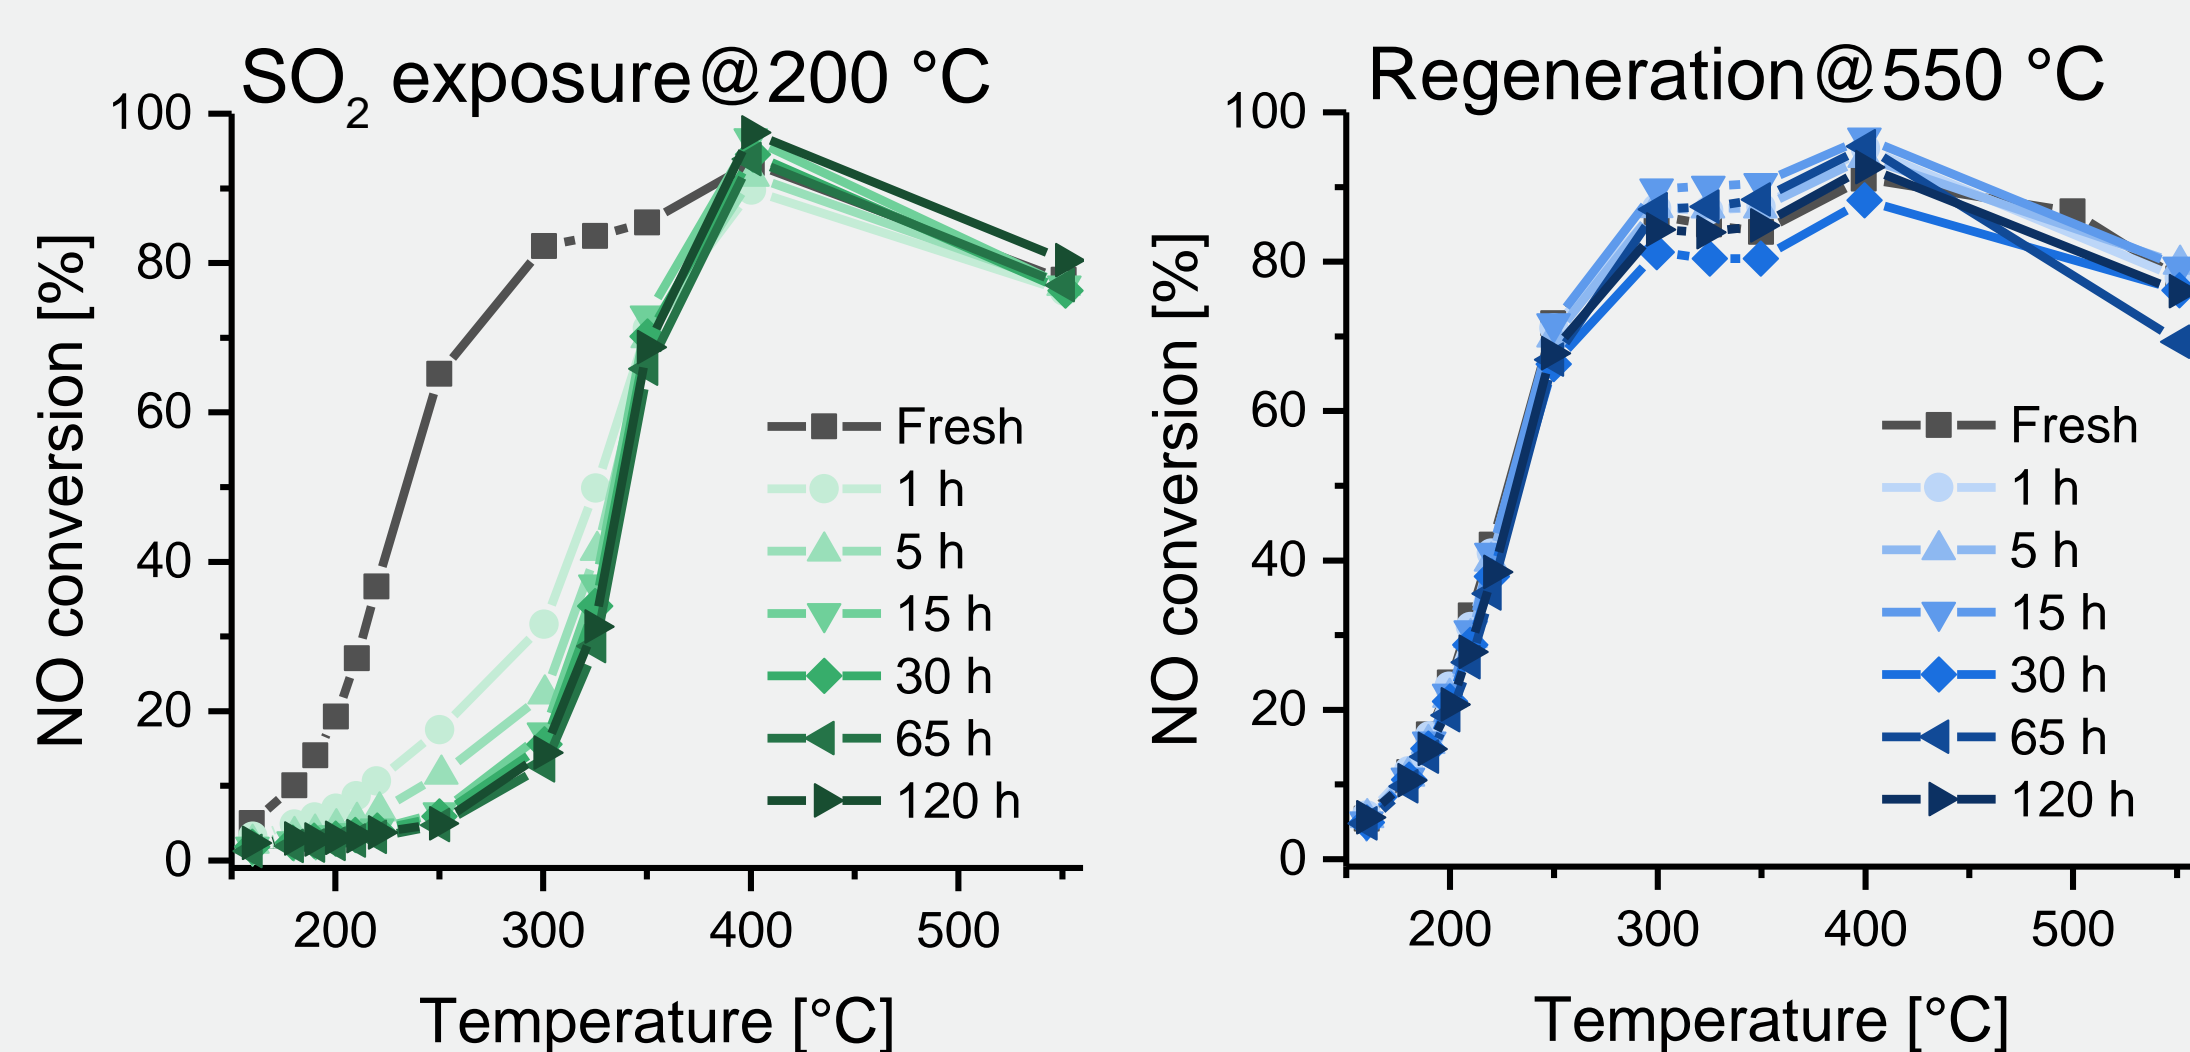

Typical SO₂-poisoning behavior

- Exposure to SO₂ results in significantly lower NO conversions in the temperature range 180-350 °C
- Regeneration at 550 °C in SO₂-free gas can restore the predominant part of the drop in NO conversion inferred by SO₂

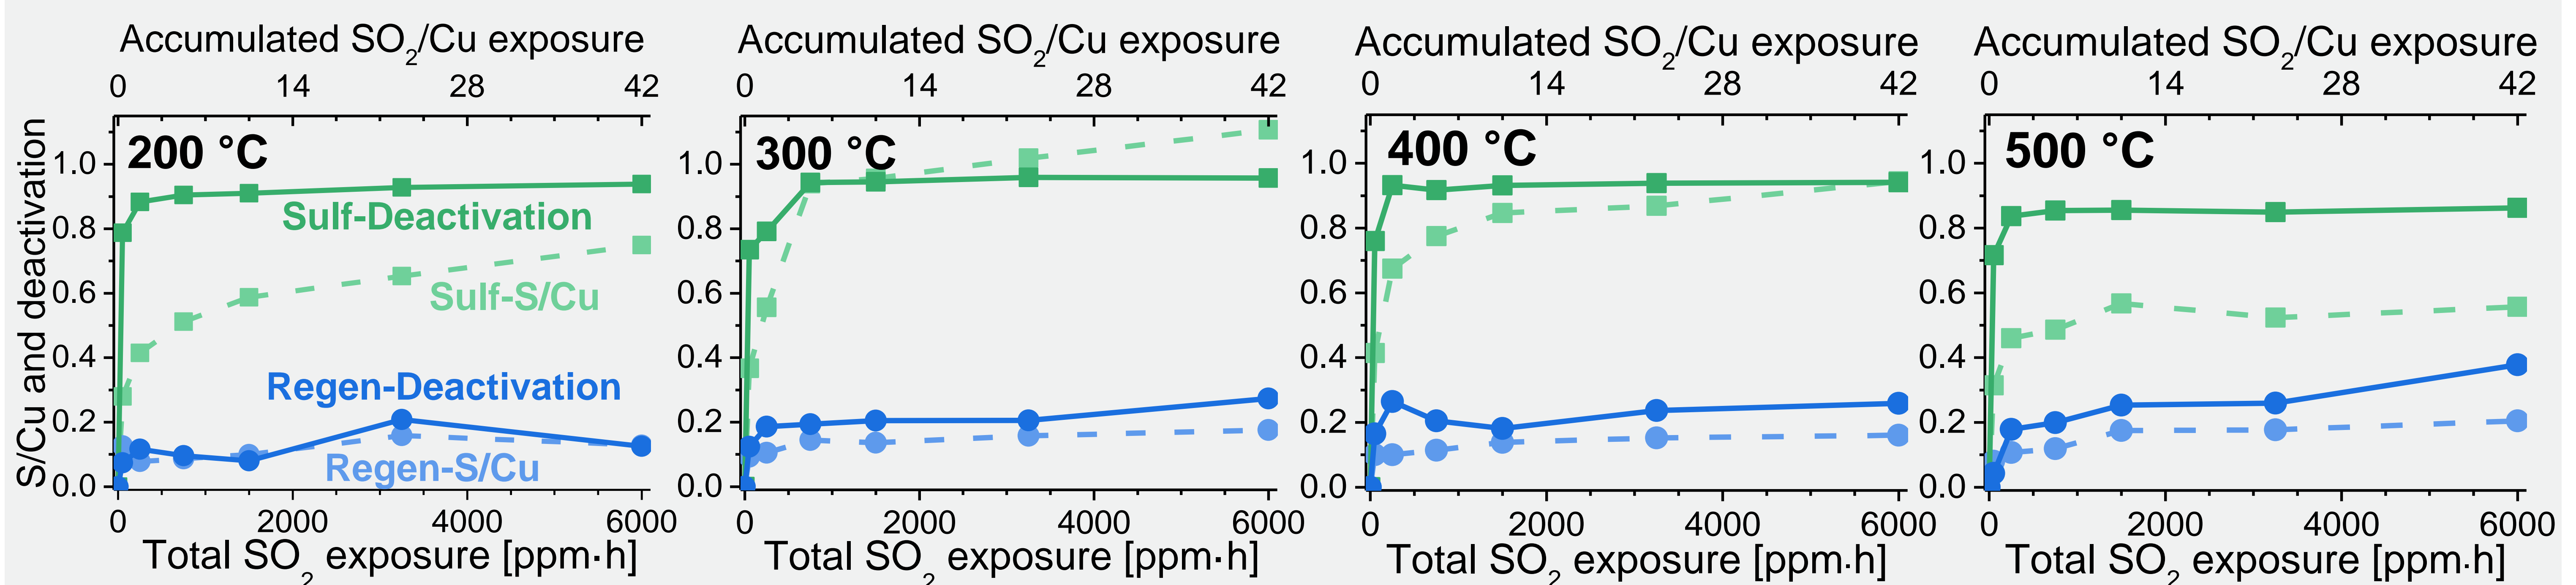

Experimental


Catalyst: Cu-CHA powder with Si/Al of 14.6 and Cu/Al of 0.42 (2.76 wt% Cu on dry matter basis), and of sieve fraction 150-300 μm.

SCR activity measurements: 5 mg catalyst, 500 ppmv NO, 533 ppmv NH₃, 10 % O₂, 5 % H₂O, with N₂ at a total flow rate of 225 NmL/min.

SO₂ exposure: 50 ppmv SO₂, 10 % O₂ and 5 % H₂O with N₂ to 1.67 NL/min at 200, 300, 400 or 500 °C for 1, 5, 15, 30, 65 or 120 h.

Regeneration: 6 h at 550 °C in 10 % O₂ and 5 % H₂O gas.

ICP-OES: S/Cu ratios of the sulfated and regenerated catalysts.

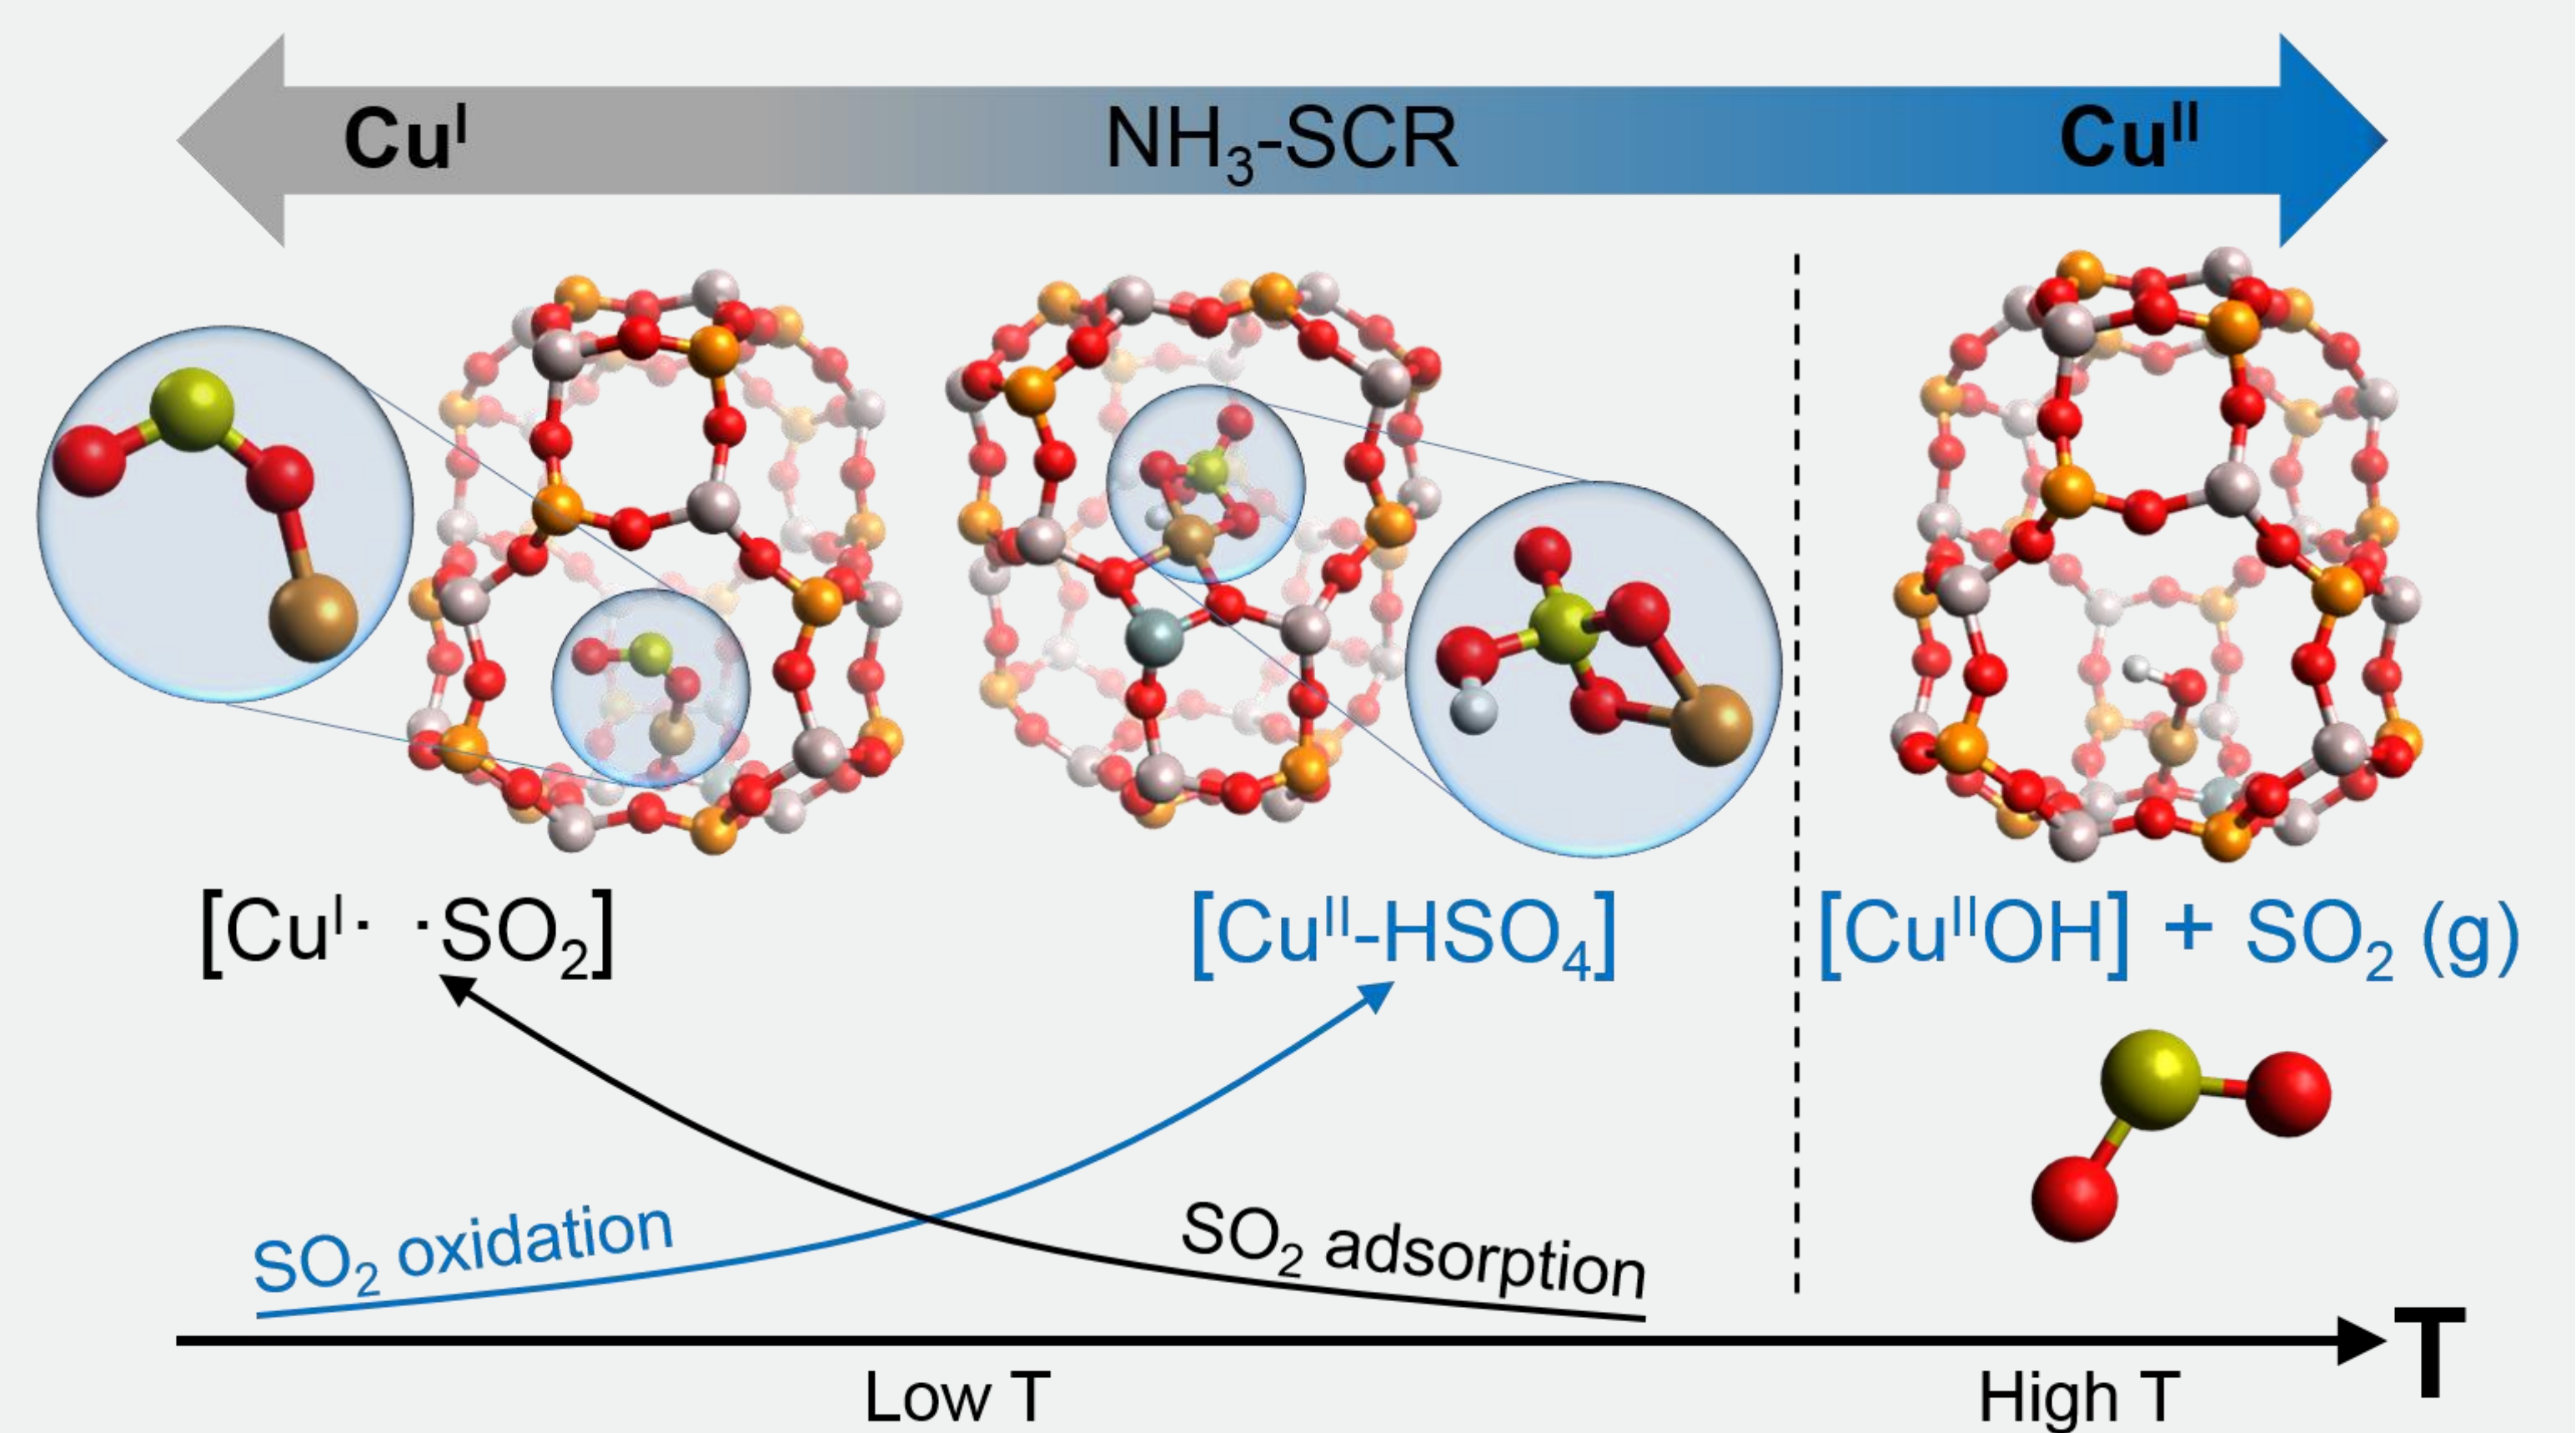

Potential lifetime SO₂/Cu exposure

Assumptions for the lifetime of a heavy-duty vehicle:

- Distance: 800 000 km
- Average mileage: 30 L diesel/ 100 km
- Diesel: 5 wt ppm S (Ultra-low sulfur diesel in: EU: <10 wt ppm S, USA: <15 wt ppm S)
- Cu-CHA: 1.5 kg with 3 wt% Cu (45 g Cu)
- Potential accumulated lifetime SO₂/Cu exposure: **44**

Conclusions

- Deactivation occurs fast regardless of exposure temperature
 - Maximum deactivation levels reached already at low S/Cu ratios
- Regeneration at 550 °C can limit deactivation to 20 % throughout the catalyst lifetime
- Practical application of Cu-CHA as SCR catalyst is contingent on:
 - Efficient regeneration
 - Use of ultra-low sulfur diesel