



Distributed and Modular Bio-Inspired Architecture for Adaptive Motor Learning and Control

Capolei, Marie Claire; Falotico, Egidio; Lund, Henrik Hautop ; Tolu, Silvia

Published in:

School of Brain Cells & Circuits "Camillo Golgi": The Neural Bases of Action

Publication date:

2018

Document Version

Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):

Capolei, M. C., Falotico, E., Lund, H. H., & Tolu, S. (2018). Distributed and Modular Bio-Inspired Architecture for Adaptive Motor Learning and Control. In School of Brain Cells & Circuits "Camillo Golgi": The Neural Bases of Action: from cellular microcircuits to large-scale networks and modelling (pp. 92-97). Frontiers Media SA.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Distributed and Modular Bio-Inspired Architecture for Adaptive Motor Learning and Control

Marie Claire Capolei^{1*}, Egidio Falotico², Henrik Hautop Lund¹, Silvia Tolu¹

¹Technical University of Denmark, Kongens Lyngby, Denmark

²Istituto di BioRobotica della Scuola Superiore Sant'Anna, Pontedera, Italy

*macca@elektro.dtu.dk

Recent studies have demonstrated that autonomous robots can outperform the task they are programmed for, but are limited in their ability to adapt to unexpected situations (Ingrand and Ghallab, 2017). This limitation is due to the lack of generalization, i.e., the robot can not transfer knowledge across multiple situations. Even the application of modern artificial intelligence (AI) techniques does not support a robust generalization when the range of probable inputs is infinite (Yang et al., 2018; Mnih et al., 2015; Cai et al., 2017; Kober et al., 2013). As a matter of fact, AI methods can interpolate knowledge but not extrapolate it, i.e., they can adapt on new, unseen data that are within the bounds of their experience, but not on data that are outside the bounds. So far, robots have been mostly treated as stand-alone systems in a vacuum, while the real world is more complex and includes continuous interaction with external entities. Accordingly, the design of a generalized robotic controller is not trivial, in particular when the dynamical conditions are unknown.

From the observation of nature, it is possible to deduce the level of competence that animals have when interacting with the environment. The study and understanding of the central nervous system (CNS), which is the main responsible of the body complex movements during the interaction with the environment (Wolpert and Ghahramani, 2000; D'Angelo and Wheeler-Kingshott, 2017), may give new insights about the artificial replication of the animals' interactive and adaptive behaviour. As a matter of fact, the CNS is constituted by different regions whose role, relation and distribution are important for the optimal execution of complex tasks (see (Caligiore et al., 2017) for a review).

This investigation has its foundation in the Human Brain Project (Markram et al., 2011), which is trying to achieve a more clear understanding of the

brain's capabilities. Here, we propose the initial design of a distributed and modular bio-inspired control architecture that aims to artificially replicate the CNS areas involved in planning and executing voluntary movements (figure 1).


The distribution of the architecture is based on the "divide and conquer" concept, where the whole system is decomposed into separated and specialized components. The modularity refers to the independence of each component and its interdependence to the other structures of the architecture. The malfunctioning of each module only affects its contribution to the system and not to the operating state of the other modules. The design of the architecture is specific for gross motor skills involved in the coordination of a robotic arm during the interaction with an external system, such as dynamical target reaching and object manipulation. The control system will be tested mainly on virtual robots in the physical simulation environment offered by the Neurorobotics Platform (NRP) (Falotico et al., 2017). The NRP not only includes a variety of robot and environments, but also a detailed physics simulator. The architecture follows the guidelines from different studies (Caligiore et al., 2017; Houk and Wise, 1995; Casellato et al., 2012; Tomita and Yano, 37 2007; Ryczko et al., 2016; Santos and Matos, 2011) and includes CNS regions such as the brain stem (action regulation), the cerebellum (motor adaptation), the spinal cord (motor pattern generation), the basal ganglia (action selection), and the motor cortex (Initiation, planning, procedure of motion). The CNS areas will be modeled combining classical control and robotics methods together with bio-inspired AI techniques.

This study does not only aim to artificially mimic the connectivity and functionality of the CNS (as seen in previous studies (Floreato et al., 2014; Prescott et al., 2016; Mitchinson and Prescott, 2016)), but to also analyze, with practical evidence, how different brain regions map context-sensitive motor skills as proposed by Wolpert and Kawato (Wolpert and Kawato, 1998). This is because we believe that the modularity of each brain region is fundamental for the extrapolation of valuable information from heterogeneous dynamical stimuli. This extrapolation could facilitate the motor prediction and adaptation in changing or unknown conditions.

Among these CNS regions, it is well known the pivotal role of the cerebellum in motor learning and adaptation (Ito, 2008; Dean et al., 2010; Verduzco-Flores and O'Reilly, 2015; D'Angelo, 2014). Several robots have been already endowed with cerebellar-like control architectures with promising results (Garrido Alcazar et al., 2013; Tolu et al., 2012, 2013; Vannucci et al., 2016;

Casellato et al., 2015). However, these studies mostly focused on the functionality of a specific CNS region, keeping the contribution and dependency with other brain structures neglectable. Moreover, the experiments were run in simplified conditions with marginal dynamics, absent interaction with the environment, and relative goal, i.e., goal not related to an external reference or exteroceptive sensors.

Our investigation will firstly focus on the cerebellum. The way the cerebellum maps and processes the sensory information in relation to the execution of complex dynamical tasks is not totally clear. We assume that an answer could be found in the regular and modular structure of the cerebellum, where distinct functional units can be observed (Ruigrok, 2011). In 2006, Ito claimed that in each unit a forward or an inverse internal model is captured for representing the relation between action and outcome (Ito, 2006). In addition to Ito's internal models theory, there is also evidence that the human cerebellum can be modeled by a combination of both inverse and forward internal models (Wolpert and Kawato, 1998). Nonetheless, this mixed model has not widely been used in robotic control in particular when the characteristics of the robot and/or the environment change. The secondary aspect

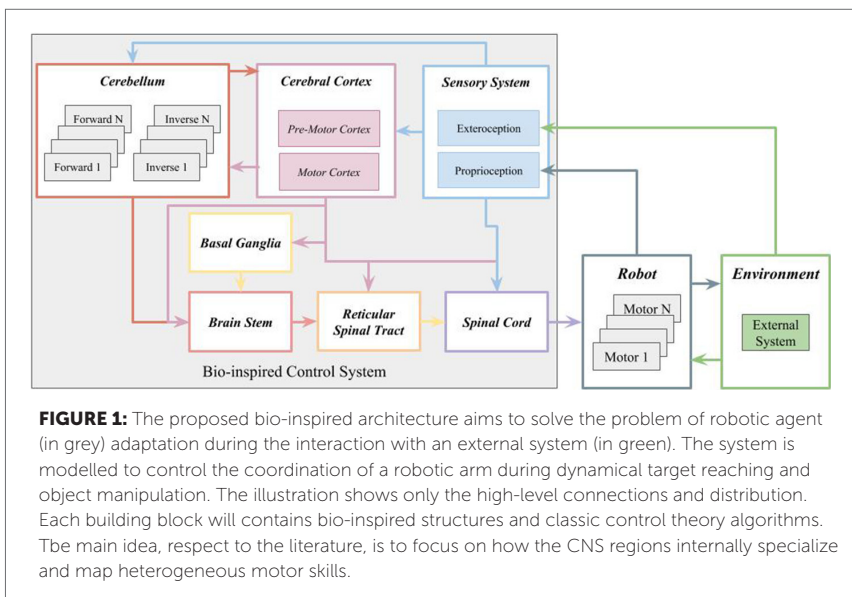

to be investigated is the reciprocal interaction between the cerebellum and other CNS areas (Houk and Wise, 1995). The cerebellum will be integrated in the distributed architecture shown in figure 1.

Starting from the theory that the cerebellum is decoupled into sub-units, we are going to analyze how the specialization of each unit and their cooperation influences the mapping of heterogeneous dynamical information onto motor skills. From this analysis, we expect to comprehend how the malfunctioning of a specific unit can influence the final corrective action of the cerebellum. At the same time, this could help to understand which feature is not mapped correctly inside the internal model and consequentially correct this lack. Thereafter, from a macro-level perspective, we will investigate how the learned experience is exchanged and utilized across different CNS regions for planning and executing context-related motor commands. This study could give new guidelines for modeling a more robust and distributed robotic control architecture. As matter of fact, the CNS demonstrated that the malfunctioning of one system component does not preclude the operating state of the whole architecture, which is a beneficial aspect for modern autonomous robot. On the other hand, the application of neuro-scientific assumptions on practical experiments could give a feedback and open new lines of research.

To conclude, the outcome of the present investigation will provide the state-of-the-art for more complex bio-inspired control architectures for neuro-robots that learn from experiences under varying dynamical conditions.

ACKNOWLEDGEMENT

This work has received funding from the EU-H2020 Programme under the grant agreement n.785907 (Human Brain Project SGA2) and the Marie Curie project n. 705100 (Biomodular).

Keywords: cerebellum, modular, neuro-robotics, bio-inspired architecture, motor control and learning, adaptive control

REFERENCES

Cai, J., Shin, R., and Song, D. (2017). Making neural programming architectures generalize via recursion. arXiv preprint arXiv:1704.06611

- Caligiore, D., Pezzulo, G., Baldassarre, G., Bostan, A. C., Strick, P. L., Doya, K., et al. (2017). Consensus paper: towards a systems-level view of cerebellar function: the interplay between cerebellum, basal ganglia, and cortex. *The Cerebellum* 16, 203–229
- Casellato, C., Antonietti, A., Garrido, J. A., Ferrigno, G., D'Angelo, E., and Pedrocchi, A. (2015). Distributed cerebellar plasticity implements generalized multiple-scale memory components in real-robot sensorimotor tasks. *Frontiers in Computational Neuroscience* 9, 24. doi:10.3389/fncom.2015.00024
- Casellato, C., Pedrocchi, A., Garrido, J., Luque, N., Ferrigno, G., D'Angelo, E., et al. (2012). An integrated motor control loop of a human-like robotic arm: feedforward, feedback and cerebellum-based learning. In *Biomedical Robotics and Biomechatronics (BioRob), 2012 4th IEEE RAS & EMBS International Conference on (IEEE)*, 562–567
- D'Angelo, E. (2014). The organization of plasticity in the cerebellar cortex: from synapses to control. In *Progress in brain research (Elsevier)*, vol. 210. 31–58
- D'Angelo, E. and Wheeler-Kingshott, C. (2017). Modelling the brain: Elementary components to explain ensemble functions. *Rivista Del Nuovo Cimento* 40, 297–333
- Dean, P., Porrill, J., Ekerot, C.-F., and Jorntell, H. (2010). The cerebellar microcircuit as an adaptive filter: experimental and computational evidence. *Nature Reviews Neuroscience* 11, 30
- Falotico, E., Vannucci, L., Ambrosano, A., Albanese, U., Ulbrich, S., Vasquez Tieck, J. C., et al. (2017). Connecting artificial brains to robots in a comprehensive simulation framework: The neurorobotics platform. *Frontiers in neurorobotics* 11, 2
- Floreano, D., Ijspeert, A. J., and Schaal, S. (2014). Robotics and neuroscience. *Current Biology* 24, R910–R920
- Garrido Alcazar, J., Luque, N., D'Angelo, E., and Ros, E. (2013). Distributed cerebellar plasticity implements adaptable gain control in a manipulation task: a closed-loop robotic simulation. *Frontiers in Neural Circuits* 7, 159. doi:10.3389/fncir.2013.00159
- Houk, J. C. and Wise, S. P. (1995). Distributed modular architectures linking basal ganglia, cerebellum, and cerebral cortex: their role in planning and controlling action. *Cerebral cortex* 5, 95–110
- Markram, H., Meier, K., Lippert, T., Grillner, S., Frackowiak, R., Dehaene, S., et al. (2011). Introducing the human brain project. *Procedia Computer Science* 7, 39–42
- Ingrand, F. and Ghallab, M. (2017). Deliberation for autonomous robots: A survey. *Artificial Intelligence* 247, 10 – 44. doi:https://doi.org/10.1016/j.artint.2014.11.003. Special Issue on AI and Robotics
- Ito, M. (2006). Cerebellar circuitry as a neuronal machine. *Progress in neurobiology* 78, 272–303
- Ito, M. (2008). Control of mental activities by internal models in the cerebellum. *Nature Reviews Neuroscience* 9, 304
- Kober, J., Bagnell, J. A., and Peters, J. (2013). Reinforcement learning in robotics: A survey. *The International Journal of Robotics Research* 32, 1238–1274
- Mitchinson, B. and Prescott, T. J. (2016). Miro: a robot "mammal" with a biomimetic brain-based control system. In *Conference on Biomimetic and Biohybrid Systems (Springer)*, 179–191
- Mnih, V., Kavukcuoglu, K., Silver, D., Rusu, A. A., Veness, J., Bellemare, M. G., et al. (2015). Human-level control through deep reinforcement learning. *Nature* 518, 529
- Prescott, T., Ayers, J., Grasso, F., and Verschure, P. (2016). Embodied models and neurorobotics
- Ruigrok, T. J. (2011). Ins and outs of cerebellar modules. *The cerebellum* 10, 464–474

- Ryczko, D., Thandiackal, R., and Ijspeert, A. J. (2016). Interfacing a salamander brain with a salamander like robot: Control of speed and direction with calcium signals from brainstem reticulo-spinal neurons. In *Biomedical Robotics and Biomechatronics (BioRob)*, 2016 6th IEEE International Conference on (IEEE), 1140–1147
- Santos, C. P. and Matos, V. (2011). Gait transition and modulation in a quadruped robot: A brain-stem-like modulation approach. *Robotics and Autonomous Systems* 59, 620–634
- Tolu, S., Vanegas, M., Garrido, J. A., Luque, N. R., and Ros, E. (2013). Adaptive and predictive control of a simulated robot arm. *International journal of neural systems* 23, 1350010
- Tolu, S., Vanegas, M., Luque, N. R., Garrido, J. A., and Ros, E. (2012). Bio-inspired adaptive feedback error learning architecture for motor control. *Biological cybernetics* 106, 507–522
- Tomita, N. and Yano, M. (2007). Bipedal robot controlled by the basal ganglia and brainstem systems adjusting to indefinite environment. In *Complex Medical Engineering, 2007. CME 2007. IEEE/ICME International Conference on (IEEE)*, 116–121
- Vannucci, L., Falotico, E., Tolu, S., Dario, P., Lund, H. H., and Laschi, C. (2016). Eye-head stabilization mechanism for a humanoid robot tested on human inertial data. In *Conference on Biomimetic and Biohybrid Systems (Springer)*, 341–352
- Verduzco-Flores, S. O. and O'Reilly, R. C. (2015). How the credit assignment problems in motor control could be solved after the cerebellum predicts increases in error. *Frontiers in computational neuroscience* 9, 39
- Wolpert, D. M. and Ghahramani, Z. (2000). Computational principles of movement neuroscience. *Nature neuroscience* 3, 1212
- Wolpert, D. M. and Kawato, M. (1998). Multiple paired forward and inverse models for motor control. *Neural networks* 11, 1317–1329
- Yang, G.-Z., Bellingham, J., Dupont, P. E., Fischer, P., Floridi, L., Full, R., et al. (2018). The grand challenges of science robotics. *Science Robotics* 3. doi:10.1126/scirobotics.aar7650