



3D modeling investigation of vertical solute transport through fractured clayey tills

Mosthaf, Klaus; Rolle, Massimo; Aamand, Jens; Jørgensen, Peter R.

Publication date:
2020

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Mosthaf, K., Rolle, M., Aamand, J., & Jørgensen, P. R. (2020). *3D modeling investigation of vertical solute transport through fractured clayey tills*. Abstract from Computational Methods in Water Resources XXIII.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

3D modeling investigation of vertical solute transport through fractured clayey tills

Klaus Mosthaf^{1,2}, Massimo Rolle¹, Jens Aamand², Peter R. Jørgensen³

¹ Technical University of Denmark, 2800 Lyngby, Denmark

² Geological Survey of Denmark and Greenland, 1350 Copenhagen, Denmark

³ GEOZ ApS, 3520 Farum, Denmark,

Key words: preferential flow, 3D fracture transport modeling, large undisturbed column experiments

We present a model-based investigation of the transport of tracers and pesticides through fractured clayey tills. To characterize flow and transport properties, we conducted well-controlled flow-through experiments in large undisturbed columns (LUC, diameter 0.5 m, height 0.5 m, [1]) of fractured clayey tills from two field sites in eastern Denmark. Hydraulic tests yielded matrix hydraulic conductivity and porosity values and allowed the determination of fracture hydraulic apertures. Solutes with different sorption and diffusion characteristics were injected in the LUCs at a constant and a variable flow rate: bromide as a conservative solute and tebuconazole, a pesticide that sorbs to clayey tills. Finally, preferential flow paths were made visible by injection of the dye tracer Brilliant Blue followed by segmentation of the columns.

A detailed 3D discrete-fracture model comprising the observed preferential flow through fractures and macropores, the interaction with the clayey-till matrix (advection, diffusion, sorption) and the physical setup of the LUC was used to interpret the experiments and to shed light on the transport behavior in the two columns. Different transport mechanisms prevailed; the first experiment with clayey till from about 2 m bgs was dominated by fast advective transport through larger fractures and macropores with apertures of about $\sim 100 \mu\text{m}$, whereas the transport in the second column from 5 m bgs was happening much slower through smaller fractures ($\sim 10 \mu\text{m}$) and by advection and diffusion through the matrix being more prevalent. The model could reproduce the breakthrough curves from the flow-through experiments. The sorption behavior of tebuconazole to the clayey tills could be captured by introducing non-equilibrium sorption kinetics in the governing transport equation. Furthermore, the flow and transport parameters determined by the experiments and the calibrated 3D models served as basis for a modeling investigation, where the properties of the LUCs were applied to larger vertical cross sections and the leaching behavior of conservative and sorbing solutes/pesticides was analyzed under the influence of depth-varying fracture properties. This allowed us to study possible bottlenecks for vertical solute transport at the considered field sites.

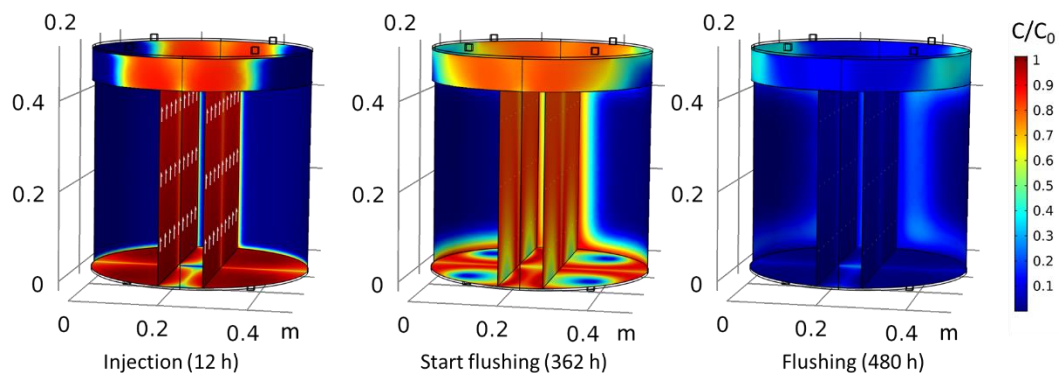


Figure 1: Example of a 3D model simulation of a LUC flow through experiment.

References

[1] P.R. Jørgensen, K. Mosthaf and M. Rolle (2019). A Large Undisturbed Column Method to Study Flow and Transport in Macropores and Fractured Media. *Groundwater*, **57**, 951–961, (2019).