



Erosion safemode control demonstration

Hasager, Charlotte Bay; Bech, Jakob Ilsted; Hannesdóttir, Ásta; Madsen, Jens Visbech; Johansen, Nicolai Frost-Jensen; Vejen, Flemming

Publication date:
2021

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Hasager, C. B., Bech, J. I., Hannesdóttir, Á., Madsen, J. V., Johansen, N. F.-J., & Vejen, F. (2021). Erosion safemode control demonstration. Sound/Visual production (digital)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.



Erosion safe mode control demonstration

*Charlotte Hasager, Jakob Ilsted Bech, Ásta Hannesdóttir, Jens Visbech Madsen,
Nicolai Frost-Jensen Johansen, DTU Wind Energy
Flemming Vejen, Danish Meteorological Institute*

*EERA SP4 Aerodynamics Loads & Control, Blade Erosion Workshop
14 December 2021 online, organizer CENER*



Erosion-safe mode operation

Erosion safe mode



Aberdeen Bay Wind Farm



Aberdeen Bay Wind Farm

- Wind turbine V164 at 8.8 MW
- Hub-height 120 m
- Wind farm 11 turbines
- Distance to shore 3 km

Erosion-safe mode demonstration campaign

Erosion safe operation

Aim is to compare:


- Erosion rate
- Cost model (profit)



Standard operation

Bech *et al.* 2018 *Wind Energy Science*

Technical implementation

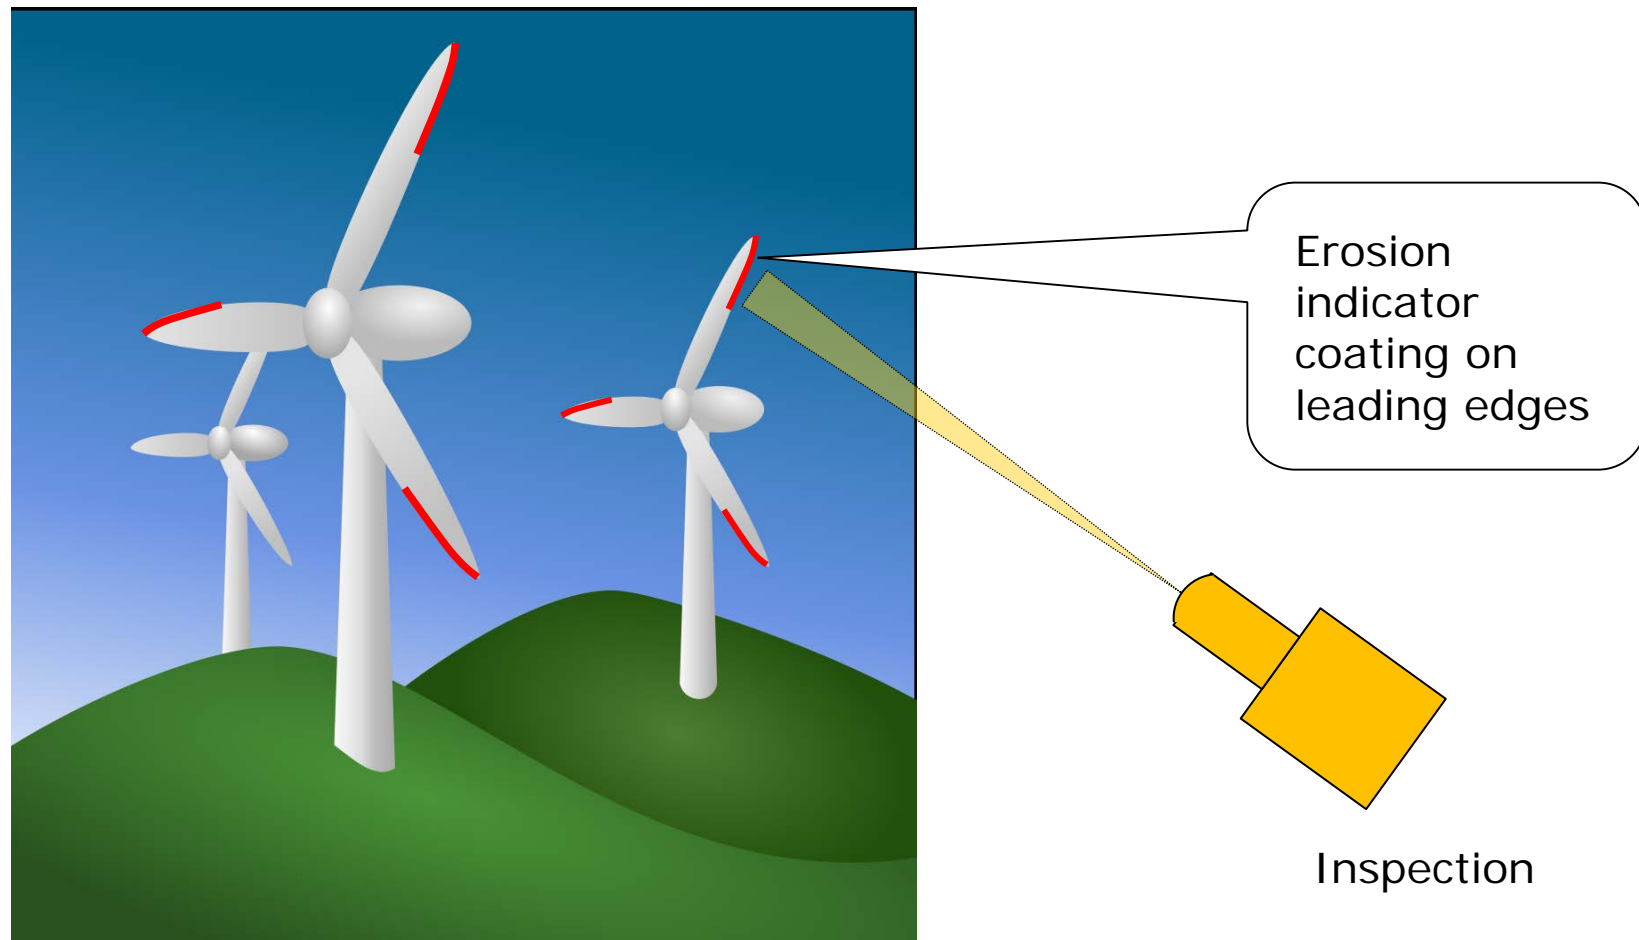

A priori knowledge



VN-curve of the indicator coating.


Testing is done in Rain Erosion Tester (RET).

Technical implementation


Micro Rain Radar
at the nacelle



Micro Rain Radar

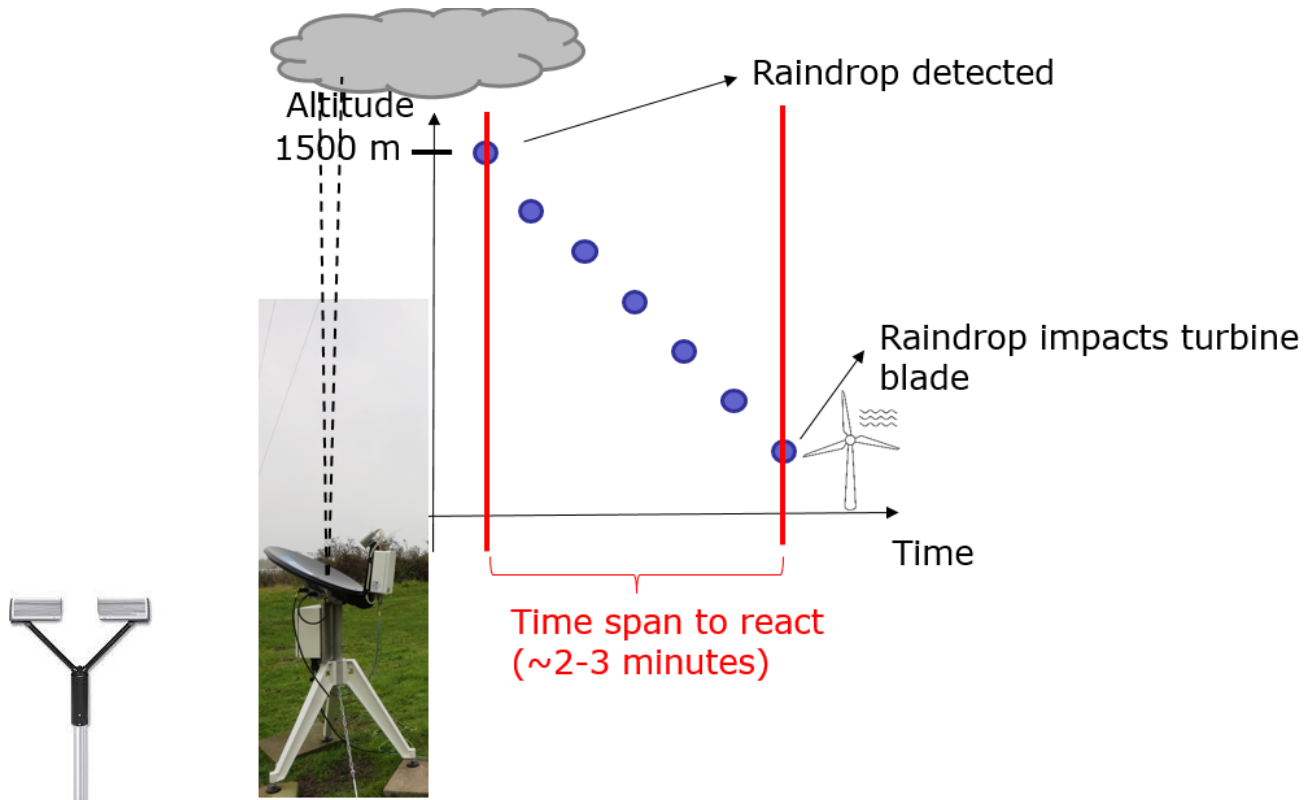

Source: Anna-Maria Tilg

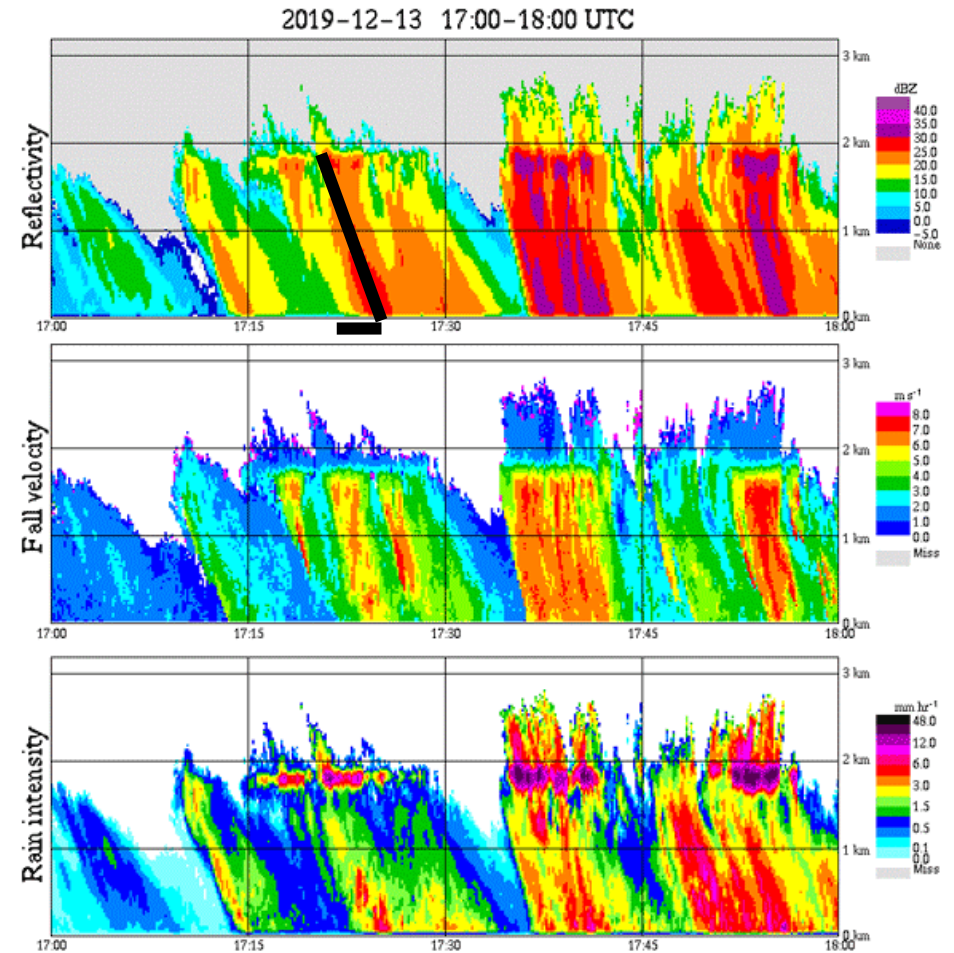

Tilg et al. 2020, *Wind Energy Science*

A priori knowledge

Expected rain and wind at site


No data is available on site

Initial analysis comparing precipitation at Danish and Scottish sites


Numerical model (ERA5)







Precipitation observations

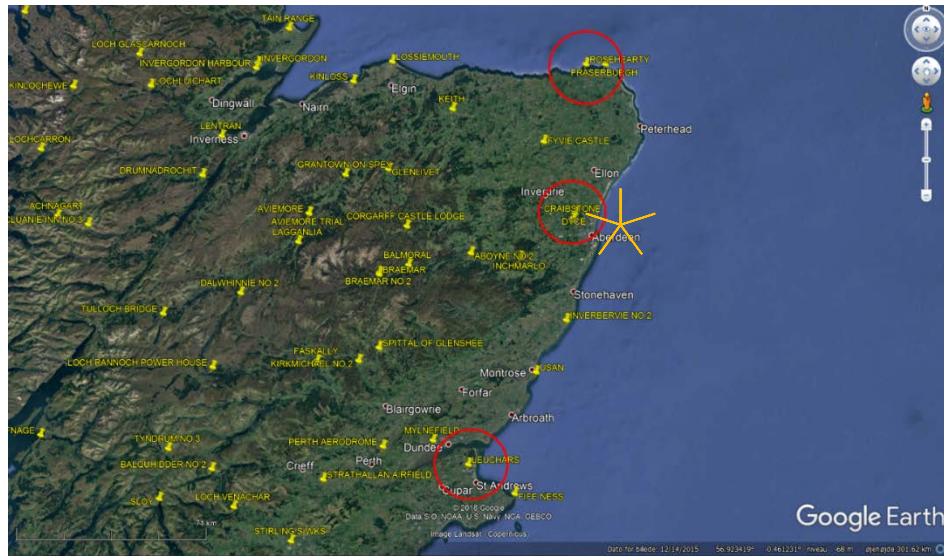


Courtesy: Google Earth

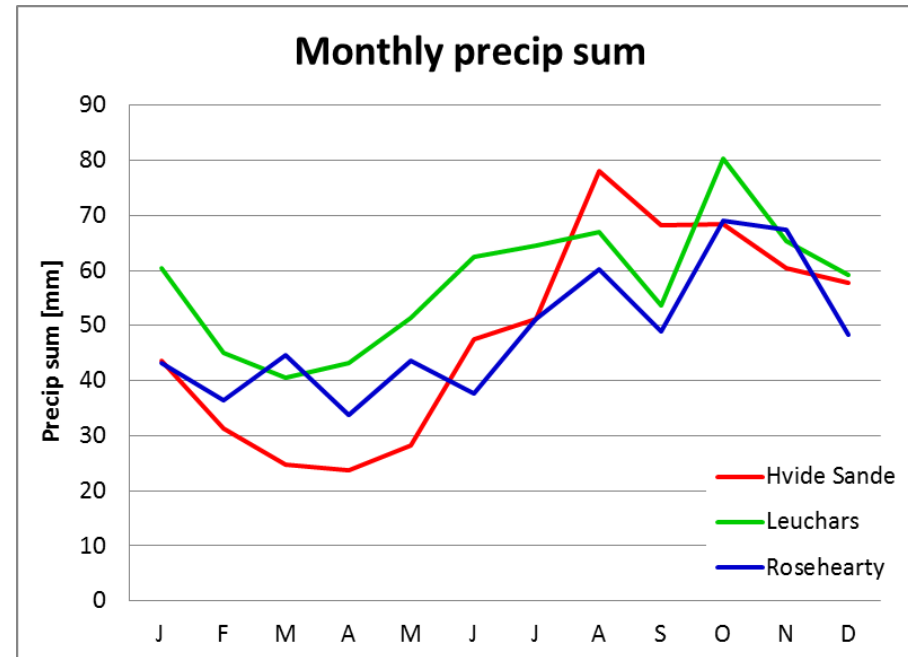

Courtesy; Flemming Vejen, DMI
Data from CEDA and DMI

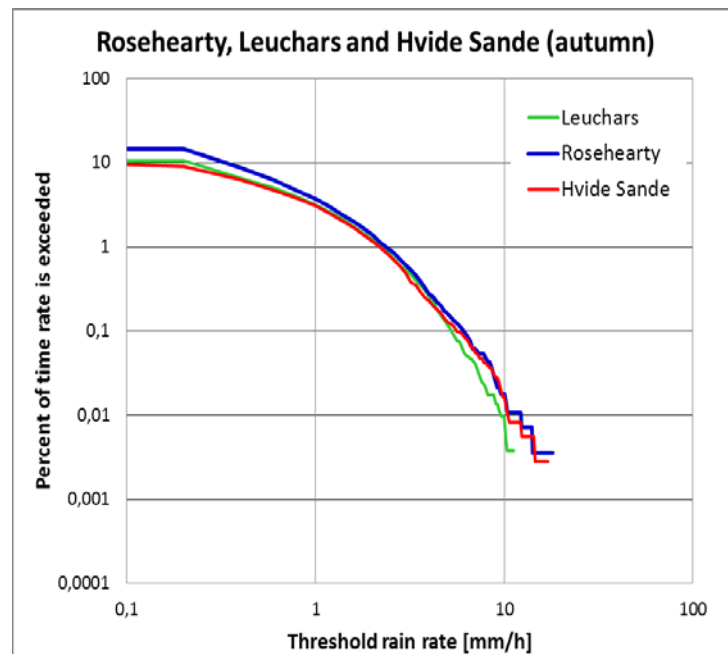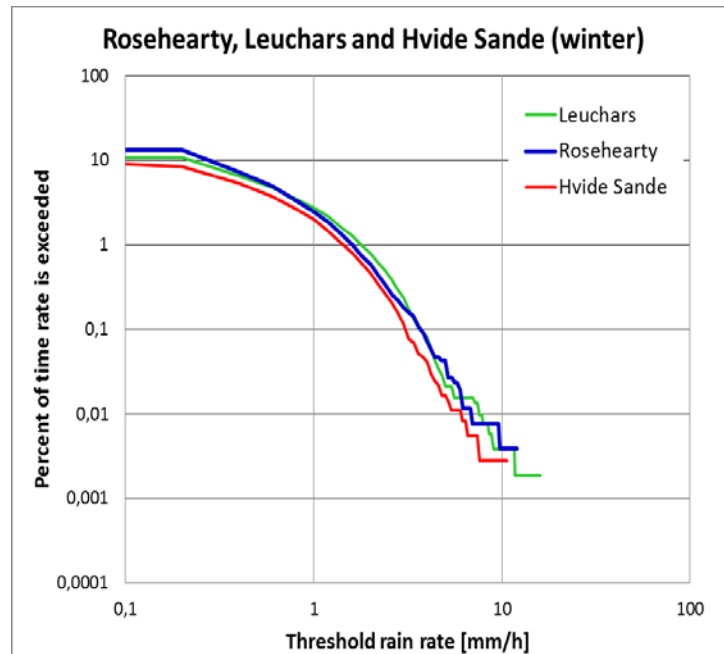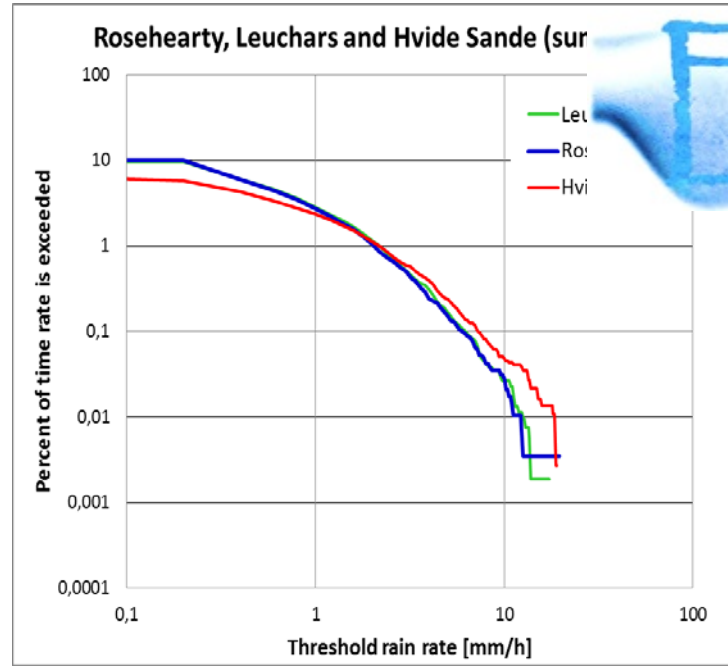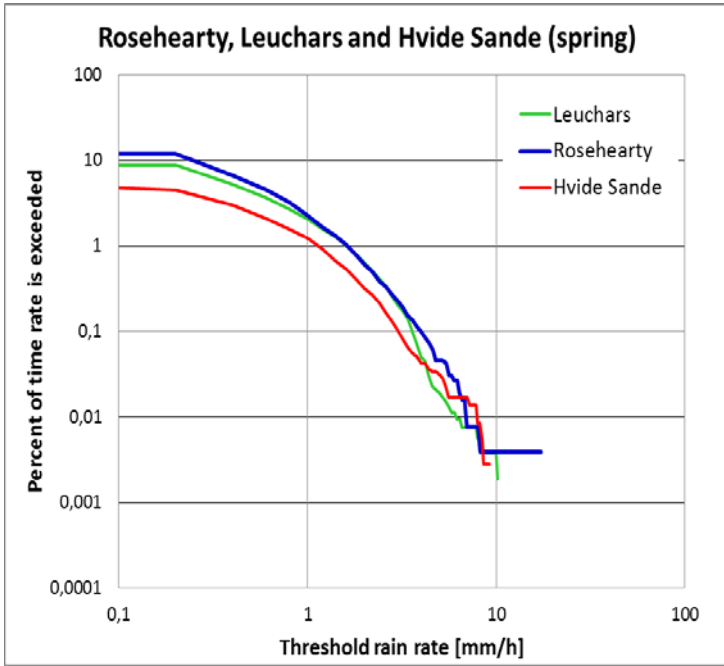

Rain 'magnified'

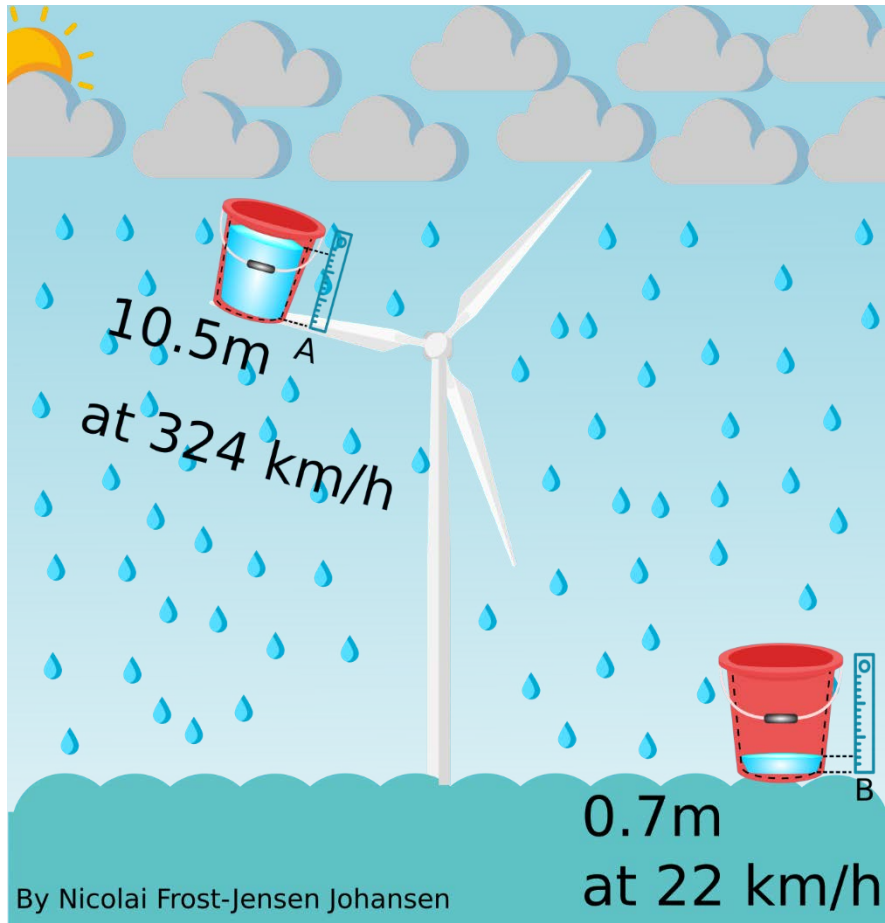

Hasager *et al.* 2021, in Book chapter


Annual rain amount at 0.7 m

Tip speed of the blades at 90 m/s

Assume the turbine is at rated speed.

Take

Rain data are 'magnified' by turbines so good accuracy is required!

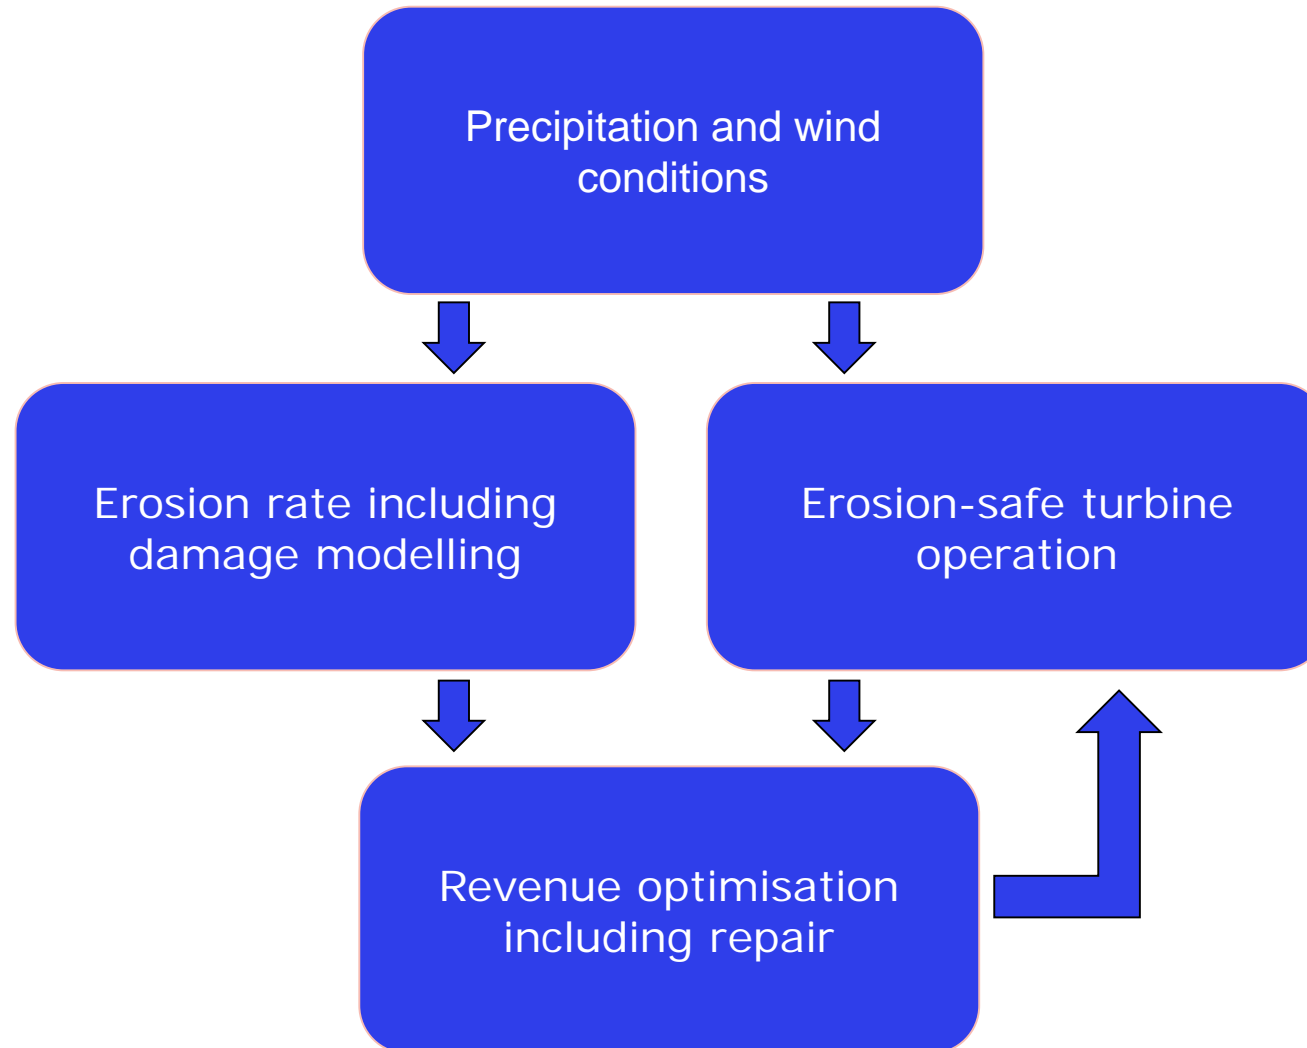


Hvide Sande: How much time?



- In 18 years May to September 2002 to 2019 there are
 - 12.200 10-minute values with rain \geq 0.6 mm/h
 - 8.296 10-minute values with rain \geq 1.2 mm/h
 - 3.064 10-minute values with rain \geq 3.0 mm/h
 - 377 10-minute values with rain \geq 10.0 mm/h

Using 1.2 mm/h as threshold gives in 5 months
460 10-minute values, i.e. 77 hours (3.2 days)

Out of these wind speed \geq 6.8 m/s at 10 m
261 10-minute values, i.e. **43 hours (1.8 days)**

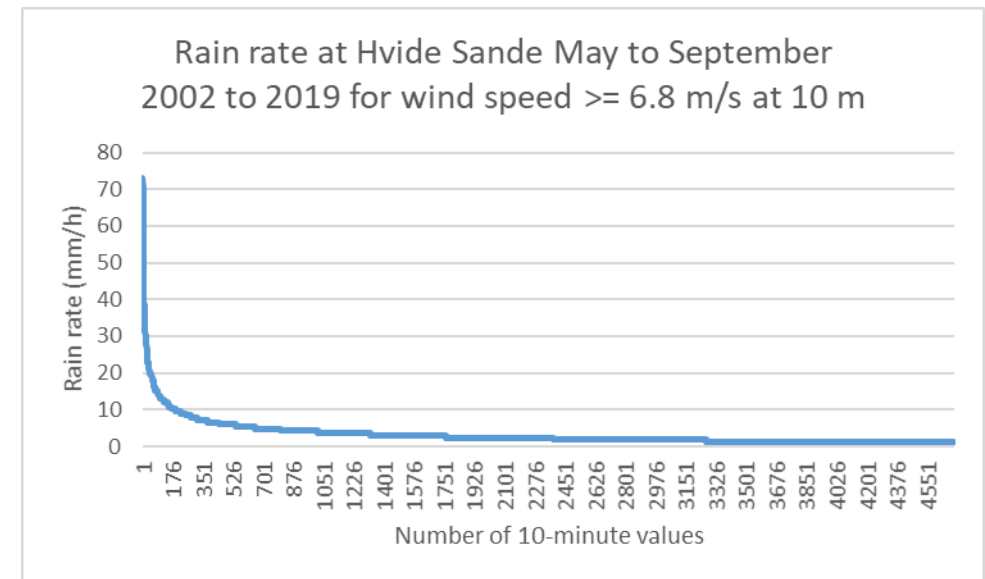

Rain rate for 18 years *only May to September!*

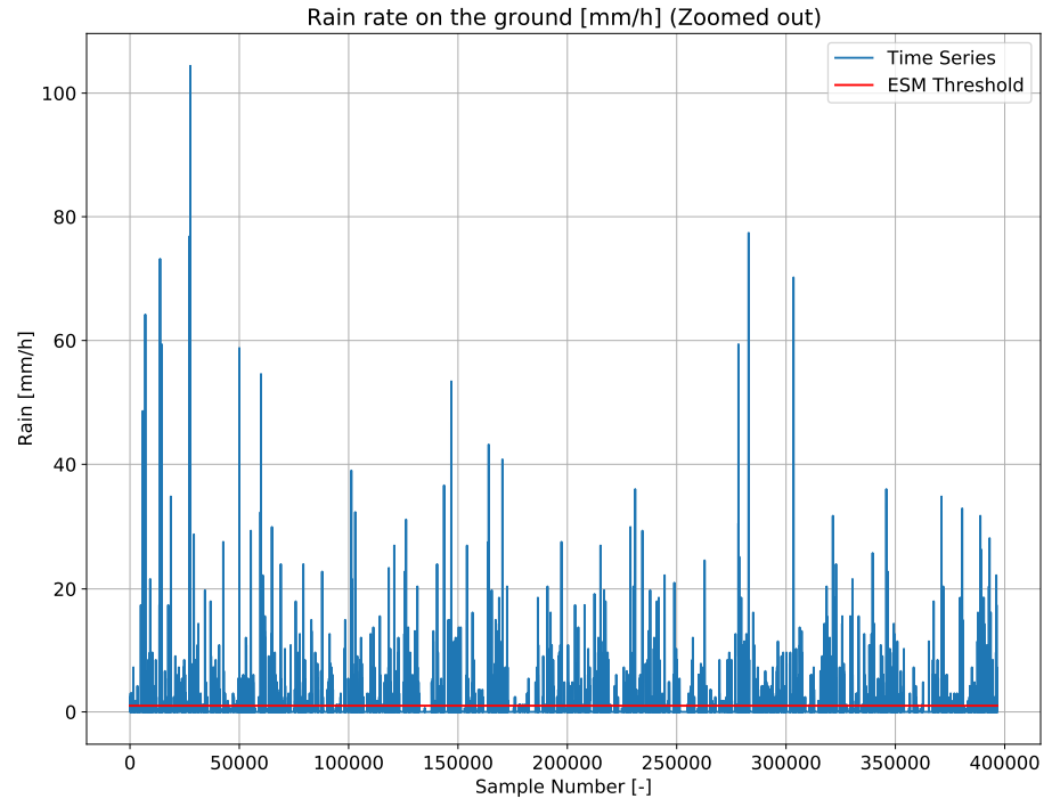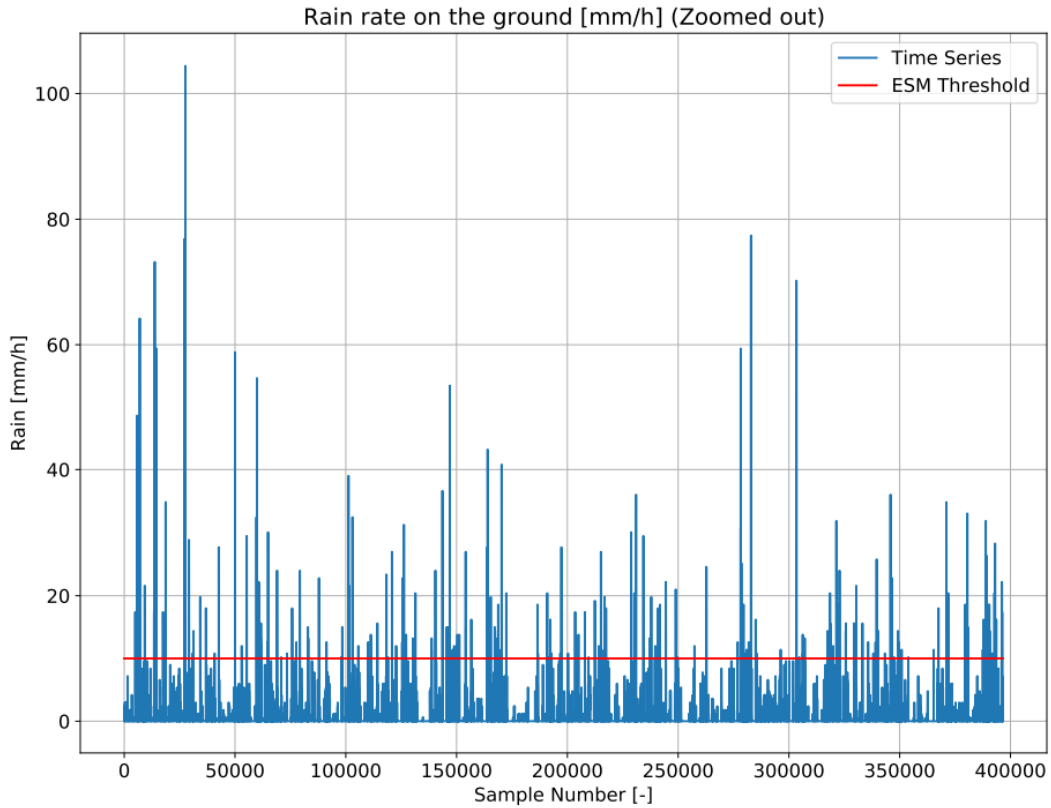

MRR PRO

- We can operate for rain rate ≥ 1 mm/h in 10 minute intervals
- We can alternatively operate for rain rate ≥ 1 mm/h in 1 or 2 minute intervals
- We can suggest to stop the turbine in case of hail

Challenges

- To install Micro Rain Radar
 - To paint the blades
 - To monitor regularly
 - To make the control settings without knowing the rain and winds well
-
- The exciting part is to overcome all the challenges and demonstrate erosion safe mode

WP5 Peer-reviewed articles

Published

- Bech, J. I., Hasager, C.B., Bak, C. 2018 Extending the life of wind turbine blade leading edges by reducing the tip speed during extreme precipitation events. *Wind Energy Science*, 3, 729–748, <https://doi.org/10.5194/wes-3-729-2018>, 2018.
- Fæster, S. Johansen, N. F.-J., Mishnaevsky Jr., L., Kusano, Y., Bech, J.I. and Madsen, M. B. 2021 Rain erosion of wind turbine blades and the effect of air bubbles in the coatings *Wind Energy*, DOI: 10.1002/we.2617
- Hasager CB, Vejen F, Skrzypiński WR, Tilg A-M. Rain Erosion Load and Its Effect on Leading-Edge Lifetime and Potential of Erosion-Safe Mode at Wind Turbines in the North Sea and Baltic Sea. 2021 *Energies*, 14(7):1959. <https://doi.org/10.3390/en14071959>
- Hasager, C.B., Vejen, F., Bech, J. I., Skrzypiński, W. R., Tilg, A.-M. Nielsen, M. 2020 Assessment of the rain and wind climate with focus on wind turbine blade leading edge erosion rate and expected lifetime in Danish Seas. *Renewable Energy*, 149, 91-102. <https://doi.org/10.1016/j.renene.2019.12.043>
- Mishnaevsky Jr, L.. et al. 2019 Micromechanisms of leading edge erosion of wind turbine blades: X-ray tomography analysis and computational studies, *Wind Energy* <https://doi.org/10.1002/we.2441>
- Mishnaevsky Jr., L., Hasager, C.B., Bak, C., Tilg, A.-M., Bech, J. I., Rad, S.D., Fæster, S. 2021 Rain erosion of wind turbine blades: Understanding, prevention and protection, *Renewable Energy*, 169, 953–969, <https://doi.org/10.1016/j.renene.2021.01.044>.
- Skrzypiński, W.R.; Bech, J.I.; Hasager, C.B.; Tilg, A.-M.; Bak, C. Optimization of the erosion-safe operation of the IEA Wind 15 MW Reference Wind Turbine. *J. Phys: Conf. Ser.* 2020, 1618, 052034
- Tilg, A.-M., Hasager, C. B., Kirtzel, H.-J., and Hummelshøj, P. 2020 Brief communication: Nowcasting of precipitation for leading edge erosion-safe mode, *Wind Energ. Sci.*, 5, 3, p. 977-981. <https://doi.org/10.5194/wes-2020-4>
- Tilg, A.-M., Vejen, F., Hasager, C. B., Nielsen, M. 2020 Rainfall kinetic energy in Denmark: relationship with drop size, wind speed and rain rate. *J. Hydrometeor.* <https://doi.org/10.1175/JHM-D-19-0251.1>
- Tilg, A.-M., Hagen, M., Vejen, F., Hasager, C. B. 2021 Variation of leading-edge-erosion relevant precipitation parameters with location and weather 2 type. *Meteorol. Z.*, Vol. 30, No. 3, 251–269, DOI 10.1127/metz/2021/1063
- Tilg, A.-M., Skrzypiński, W. R., Hannesdóttir, Á., Hasager, C.B. 2021 Effect of drop-size parameterization and rain amount on blade-lifetime calculations considering leading-edge erosion, *Wind Energy* (accepted)

Book chapter

- Hasager, C.B., Mishnaevsky, L., Bak, C., Bech, J.I., Fæster, S., Johansen, N. F.-J., 2021 How can we combat leading edge erosion at wind turbine blades? DOI: <https://doi.org/10.11581/DTU.00000214> In: Jørgensen, B.H. et al. DTU International Energy Report 2021: Perspectives on Wind Energy.

Acknowledgements

- We acknowledge the funding support by the Innovation Fund Denmark
- grant 6154-00018B for the project EROSION.

www.rain-erosion.dk

 Innovation Fund Denmark

DTU

