



## Towards hydrodynamic modelling of ship-to-ship LNG bunkering in waves with focus on gap resonance

Ding, Y. F.; Walther, J. H.; Shao, Y.

*Publication date:*  
2022

*Document Version*  
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*

Ding, Y. F., Walther, J. H., & Shao, Y. (2022). *Towards hydrodynamic modelling of ship-to-ship LNG bunkering in waves with focus on gap resonance*. Paper presented at 7th World Maritime Technology Conference 2022, Copenhagen, Denmark.

---

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

# Towards hydrodynamic modelling of ship-to-ship LNG bunkering in waves with focus on gap resonance

Y. F. Ding<sup>1</sup>, J. H. Walther<sup>1,2</sup> and Y. L. Shao<sup>1</sup>

## ABSTRACT

*Ship-to-ship bunkering of liquid fuel, e.g., LNG, outside the port can be a flexible and cost-efficient solution without having to upgrade the infrastructures at the port. The occurrence of fluid resonance in the narrow gap between side-by-side receiving vessel and bunkering vessel under wave actions may greatly influence the dynamic responses of the vessels through hydrodynamic interaction. The proximity of marine structures can generate drastic wave elevation in the narrow gap, which may reduce the operational time window of the bunkering and even risk the safety of the crew. In this paper, the fluid resonance inside the gap between two non-identical ship cross-sections in side-by-side configuration is studied under various wave conditions. The bunkering scenario that a larger cross-section on the upstream is fixed while a small cross-section free to heave in the downstream is considered as more realistic. A numerical wave tank is set up based on the commercial CFD package STAR-CCM+. The unsteady Reynolds averaged Navier-Stokes turbulence model is required to consider viscous dissipation. The volume of fluid method is applied to capture the position of the free surface, and regular waves are generated and absorbed using forcing zones at upstream and downstream boundaries, respectively. The overset meshing technique is employed near the downstream section to enable the heave motion. The heave response of the downstream section and its effect on the linear and nonlinear harmonics of wave elevation and resonant frequency inside the gap are investigated and compared with the fixed-sections scenario. It can be concluded that the heave motion reduces the gap resonance to a large extent by modulating the frequency of wave elevation inside the gap, thus avoiding the occurrence of second-order excitation.*

## KEY WORDS

Gap resonance; Ship-to-ship LNG bunkering; Harmonic analysis; Free heave motion; STAR-CCM+.

## INTRODUCTION

Recently, ship-to-ship bunkering has become a more efficient and safe way to fuel the LNG-fueled vessels outside the port. During the bunkering operations, fluid resonance inside the gap between the side-by-side receiving vessel and bunkering vessel may elevate the water surface within the gap to a large extent and influence the dynamic responses of the vessels due to hydrodynamic interaction. One of the relevant and important phenomena is referred to as piston-mode gap resonance in the literature, which is a key hydrodynamic issue that needs a thorough and deep understanding of the underlying physics. Large wave elevation due to the gap resonance may also lead to wave impacts on the soft hoses which are typically used to transfer liquid LNG between the two vessels.

Physical experiment is a direct approach to explore this problem (Kristiansen and Faltinsen 2008, 2010; Faltinsen, et al. 2011; Tan, et al. 2014). Saitoh et al. (2006) conducted laboratory experiments to understand the characteristics of fluid resonance in the gap between two fixed barges exposed to waves. Perić and Swan (2015) used experiments to characterize both the amplitude and nature of the excitation within the gap. Experiments were also carried out by Ning et al. (2018) to investigate the wave response in the gap between two barges of different draughts in incident waves.

Early numerical studies towards fluid resonance in a confined region with the presence of a free surface started with the theoretical investigation based on the linear potential-flow theory (Miao, et al. 2000; Iwata, et al. 2007; Zhu, et al. 2008).

---

<sup>1</sup> Department of Mechanical Engineering, Technical University of Denmark, 2800 Kgs. Lyngby, Denmark

<sup>2</sup> Computational Science and Engineering Laboratory, ETH Zürich, CH-8092 Zürich, Switzerland

Molin (2001) considered rectangular moonpools of large horizontal dimensions and determined the natural modes for the oscillation of the inner free surfaces in both two and three dimensions. Improved potential-flow methods with viscous corrections were applied to avoid non-physically large wave elevation within the gap at the resonance (Tan, et al. 2014; Ning, et al. 2015a, 2015b; Zhao, et al. 2018; Tan, et al. 2019). Based on both the viscous-flow model and the potential-flow model with the introduction of artificial damping term, Lu et al. (2011) presented two-dimensional (2D) numerical results of the wave loads on multiple floating bodies in close proximity and their dependences on the wave frequency, gap width, body draft, body breadth, and the number of bodies. However, they pointed out that the artificial damping has to be calibrated by model tests or Computational Fluid Dynamics (CFD) simulations in order to achieve better prediction, which may lose its advantage and limit the application of the potential-flow models to a large extent.

With the development of the capacity of modern computers to run large-scale computations, CFD methods based on Navier-Stokes equations have become a popular alternative to deal with the gap resonance problem (Lu, et al. 2010; Chua, et al. 2018; Jiang and Bai 2020). Moradi et al. (2016) reported that the water depth, body draft, and the ratio between water depth and body draft are the key factors that influence the resonant responses. It was also found that the potential-flow models not only overpredict the resonant wave heights but also fail to predict the variation trends of the resonant wave height as function of water depth. In the work of Jiang et al. (2019), piston-mode wave resonance between a ship section and a bottom-mounted terminal was studied, where it is also confirmed that the effects of fluid viscosity and the vorticity increase significantly with the increase of incident wave amplitudes. Some numerical investigations were also carried out by Gao et al. (2019, 2020a, 2020b) to simulate transient resonant motions of the free surface inside a narrow gap under various configurations and wave conditions.

As we can see from the previous studies, the focuses of most existing studies are on the fixed structures (Sun, et al. 2010; Moradi, et al. 2015; Gao, et al. 2019, 2020a, 2020b; Jiang, et al. 2021a, 2021b). In practice, floating marine structures are free to move in certain directions although they may be constrained in other degrees of freedom. To date, only few studies considered the floating structure with certain degrees of freedom of motion (Li and Zhang 2016; Li 2019; Lu, et al. 2020). These studies simulated the coupled motions of two structures and applied the potential-flow models, while the relevance to practical ship-to-ship bunkering operations is not clear. Gao et al. (2021) studied the influence of the free-heave motion of an upstream box on the gap resonance under wave actions while the downstream box remains fixed. However, in practical ship-to-ship bunkering operations, the two vessels are typically very different in size, and, naturally, the small bunkering vessel will be situated behind the larger receiving vessel thus avoiding violent relative motion between them. Therefore, the present work focuses on the gap resonance formed by two non-identical square cross-sections under wave actions. The larger upstream section remains fixed and the smaller downstream section is free to heave.

The remainder of this paper is organized as follows: the mathematical formulation of the numerical model, the applied numerical schemes and solvers are introduced, followed by the establishment of the 2D numerical wave flume. After that, two validation studies are presented, including two fixed barges and a single barge free to heave. Finally, numerical results for two non-identical barges, i.e., a fixed upstream barge and a downstream barge free to heave, are presented.

## NUMERICAL MODEL

The Unsteady Reynolds Averaged Navier-Stokes (URANS) turbulence model is applied to consider viscous dissipation and the Volume of Fluid (VOF) implementation is selected to capture the free surface. The motion of the heaving section is realized by employing the overset meshing technique. For more implementations on the scheme and solver regarding the numerical model, interested readers are referred to the book by Ferziger et al. (2002) or the STAR-CCM+ user guide.

### Governing Equations

The VOF multiphase model in STAR-CCM+ is applied to predict the distribution and the movement of the interface between the air and water phases, in which mass conservation equation and momentum equation can be expressed as:

$$\frac{d}{dt} \int_V \rho dV + \int_S \rho (\mathbf{v} - \mathbf{v}_g) \cdot \mathbf{n} dS = 0 \quad [1]$$

$$\frac{d}{dt} \int_V \rho u_i dV + \int_S \rho u_i (\mathbf{v} - \mathbf{v}_g) \cdot \mathbf{n} dS = \int_S (\tau_{ij} \mathbf{i}_j - p \mathbf{i}_i) \cdot \mathbf{n} dS + \int_V \rho g \mathbf{i}_i dV \quad [2]$$

where  $V$  is the control volume bounded by the closed surface  $S$ ;  $\mathbf{v}$  and  $\mathbf{v}_g$  are the velocity vectors of the fluid with the Cartesian components  $u_i$  and of the grid, respectively;  $\mathbf{n}$  is the unit vector normal to  $S$  and pointing outwards;  $t$  represents the time;  $p$  is the pressure and  $\rho$  is the fluid density;  $\mathbf{i}_i$  and  $\mathbf{i}_j$  are the unit vectors in direction  $x_i$  and  $x_j$ , respectively;  $\mathbf{g}$  is the gravity vector;  $\tau_{ij}$  are the components of the viscous stress tensor.

The volume fraction in this method is defined as:

$$\alpha = \begin{cases} 0, & \text{in air} \\ 0 < \alpha < 1, & \text{at the surface} \\ 1, & \text{in water} \end{cases} \quad [3]$$

Then the spatial variation of any fluid property  $f$  (e.g., the density  $\rho$ , and the dynamic viscosity  $\mu$ ) can be represented as a weight of  $\alpha$ :

$$f = \alpha f_{water} + (1 - \alpha) f_{air} \quad [4]$$

in which, the subscript “water” and “air” denote the property of the corresponding phase, respectively.

The governing equation of volume fraction is:

$$\frac{d}{dt} \int_V \alpha dV + \int_S \alpha (\mathbf{v} - \mathbf{v}_g) \cdot \mathbf{n} dS = 0 \quad [5]$$

Here,  $\alpha$  is the volume fraction of water. In this study,  $\alpha = 0.5$  is adopted to capture the interface between the two phases.

## Body and Mesh Motions

The Dynamic Fluid Body Interaction (DFBI) module in STAR-CCM+ is employed to simulate the motion response of the ship section exposed to incident regular waves. In this work, only translatory motion in heave will be considered and solved based on Newton’s second law.

The overset meshing technique is coupled with the DFBI module to update the mesh position around the heaving section. Meshes in the overset region move rigidly with the motion of the section, where the solution is coupled with the flow domain (the background region) by linearly interpolating donor-cell values to provide data for acceptor cells.

## Boundary Conditions and Numerical Implementations

The wave is generated by prescribing the volume fractions and the velocities according to Fenton’s 5th-order Stokes theory at both the inlet and outlet boundaries ( $x = -L/2$  and  $x = L/2$ ). Here  $L$  denotes the total length of the numerical wave flume. To minimize the undesired wave reflection for long-duration simulations, wave forcing is applied at the inlet and outlet boundaries to enforce the solution of the Navier-Stokes equations towards the prescribed nonlinear wave solution (Kim, et al. 2012). The no-slip boundary condition is imposed on the fixed section and the seabed, and the overset mesh is prescribed on the surfaces of the overset region that moves with the heaving section. The top boundary of the domain is defined as a pressure outlet by prescribing the hydrostatic pressure and the volume fractions of both phases (see Figure 1). The simulations are run in a quasi-2D manner with only one layer of cells in the transverse direction and symmetry boundary conditions are applied on the side-walls of the wave flume. Numerical simulations start from the still-water state with predefined initial conditions of the velocity and hydrostatic pressure of the incident wave.

The governing equations 1, 2 and 5 are solved for each cell based on the finite volume method, with all integrals approximated by the midpoint rule. The VOF method is used to account for the two fluid phases with the setup of angle factor in the High Resolution Interface Capturing scheme (HRIC) to eliminate wiggles on the free surface (Muzafferija and Perić 1999). The standard low-Re  $k$ - $\varepsilon$  turbulence model with all- $y^+$  wall treatment is applied to prevent excessive growth of turbulent viscosity in the free-surface zone (Perić 2018). The interpolation of variables from cell centre to face centre and numerical differentiation are performed using linear functions (second-order accuracy). The applied time-integration scheme is also of second order. The resulting coupled system of equations is then linearized and solved by the iterative implicit unsteady segregated solver in STAR-CCM+, using a multigrid method. Eight outer iterations are performed in each time step, which consists of solving the governing equations for the velocity components, the pressure-correction equation (using the SIMPLE method), and the transport equations for the volume fraction of water, as well as the turbulent kinetic energy  $k$  and the turbulent dissipation rate  $\varepsilon$ . In addition, the time step is adaptive to satisfy the Courant-Friedrichs-Lewy (CFL) condition on the free surface, that is,  $\Delta t \leq C_r \Delta x / v_r$ . Here,  $\Delta x$  and  $v_r$  are the mesh size and relative velocity of the fluid to the mesh, respectively. To guarantee the accuracy and stability of the results, the maximum convective Courant number  $C_r$  on the free surface is set to around 0.1 in all simulations.

## NUMERICAL WAVE FLUME

The 2D numerical wave flume is established, which is shown in Figure 1. The height of the wave flume is three times the height  $H_1$  of the larger section and its length is around  $9\lambda$ , where  $\lambda$  is the incident wavelength. To achieve quasi-2D simulations, only one grid cell is applied along the width of the flume, whose size is set as  $W = 0.08H_1$ . The origin of the Cartesian coordinate system is set on the still wave line (SWL) and at the middle of the wave flume, with wave propagating along the  $x$ -axis and elevating along the  $z$ -axis. Two non-identical square sections are located at the centre of the wave flume with a water depth of  $h = H_1$  and a gap width of  $B_g = 0.1B_1$ . The larger upstream section (hereafter denoted as section A) is fixed, which has the height  $H_1$  and breadth  $B_1$  and a draft of  $d_1 = 0.5H_1$ . The smaller downstream section (hereafter section B) is free to heave with the side width of  $H_2 = B_2 = 0.6H_1(B_1)$  and the draft of  $d_2 = 0.3H_1$ .

To the best of the authors' knowledge, no model-test data for non-identical sections are available in the literature, thus we will use the two identical sections which have been experimentally studied by Saitoh et al. (2006) to validate our setup in the numerical model. For simplicity, the system with two identical fixed boxes will be referred as "*fixed system*" later in this paper, and the other non-identical system studied here with a freely-heaving section is named "*heave system*".

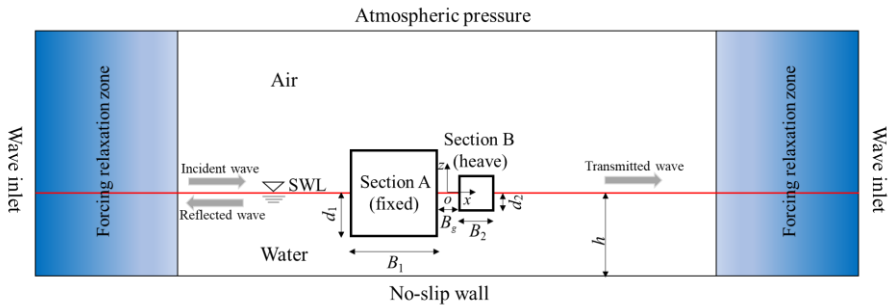


Figure 1: Sketch of the 2D numerical wave flume with two non-identical sections in the middle.

Two Stokes waves (hereafter called wave A and wave B) with equal wave height  $H_0 = 0.048H_1$  but different wavelengths  $\lambda_A = 4.044B_1$  and  $\lambda_B = 9.92B_1$  are considered as incident waves in the numerical analysis. The frequency of wave A corresponds to the natural frequency of the liquid in the gap (the resonant frequency) of the *fixed system*, while the frequency of wave B is half this resonant frequency. Two relaxation zones, whose lengths are twice the wavelengths of the incident regular waves, are applied at the inlet and outlet boundaries respectively to absorb the reflected and transmitted waves.

Trimmed mesh is adopted in the entire domain and a typical mesh configuration is displayed in Figure 2, with finer resolution near the free surface and inside the narrow gap. Near the free surface, the amount of meshes along the vertical  $z$  direction is 20 per wave height for all the studied cases and the mesh size along the horizontal  $x$  direction is designed to keep a constant aspect ratio  $\Delta x/\Delta z = 8$ , which was determined based on careful tests to produce high-quality incident waves (details not shown here). The meshes are also refined close to the sections in both phases to better resolve the flow due to the motion of section B and the flow separation around the sharp corners of both sections. The same mesh refinement is supposed to be employed in the overset region with adequate prism layers at the interface to achieve the data interpolation between cells.

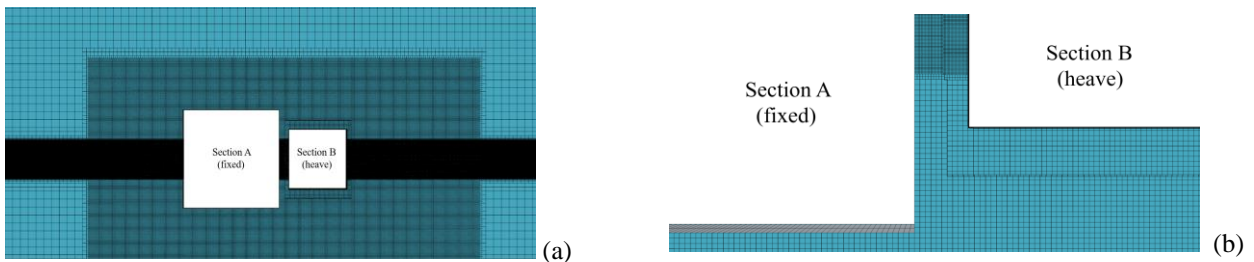


Figure 2: Mesh configuration in the computational domain: (a) around the sections; (b) close to the gap.

## VALIDATION

The present numerical model will be validated by two cases: (I) a *fixed system* with two identical sections and 5 different gap widths; (II) a single section free to heave in waves with 9 different wavenumbers. In the first case, the numerical results of free-surface elevation in the narrow gap obtained by using the computational setup described in the previous section will be compared with the existing experimental data (Saitoh et al. 2006). In the second case, the heave motion of the floating section will be compared with the experimental measurement by Rodríguez and Spinneken (2016).

## Free Surface Amplification (Case I)

The simulated non-dimensional wave height amplifications in the gap of various widths  $B_g$  for the *fixed system* with incident wave height  $H_0 = 0.048H_1$  and non-dimensional water depth  $kh = 2.476$  are presented in Figure 3. Here  $k$  and  $h$  are the wavenumber and water depth, respectively. It has to be noted that the draft of both sections is  $d/H_1 = 0.31$  in this validation study.  $H_g$  represents the free surface elevation within the gap and  $B_g$  is the gap width. It can be seen that the present results correspond well with the experimental data except for a small underestimation for the gap with a width of  $0.06B_1$ .

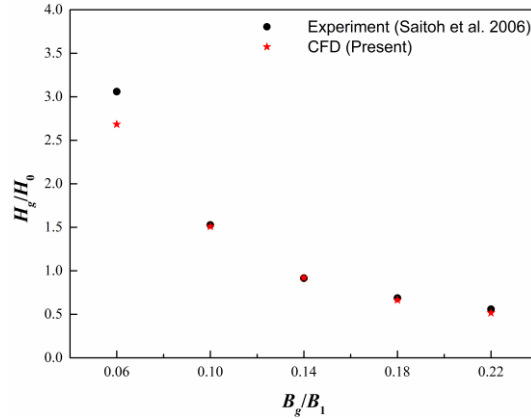


Figure 3: Amplifications of wave elevation ( $H_g/H_0$ ) in the gap of various widths  $B_g$  for the *fixed system*.

## Heave Amplitude (Case II)

Rodríguez and Spinneken (2016) carried out physical experiments in a 2D wave flume to investigate the free heave motion of a single rectangular box under regular waves. The wave tank is 63 m long, 2.79 m wide, and has a water depth of 1.25 m. A rectangular box is located at  $x = 29$  m while the incident wave is generated from  $x = 0$  m. A gap width of 0.015 m is set between the box surface and the side boundaries of the tank to approximate 2D flow condition. The box has a breadth of 0.5 m and a draft of 0.25 m. Stokes waves with the steepness  $kA_0 = 0.05$  and different wavenumbers  $k$  are considered to validate the present numerical model. Here  $A_0$  denotes the incident wave amplitude. The numerical wave flume adopted (not shown here) is similar to that in Figure 1 except for a different water depth and that a single box in the middle of the wave flume is studied in this validation case. The length of the wave tank is not exactly the same as that in the experiment due to the application of the forcing zones at both the inlet and outlet boundaries. Figure 4 shows the normalized heave motion amplitude of the floating box versus the non-dimensional wavenumber. It is observed that the numerical results correspond well with the experimental data except for some underestimation near the resonance.

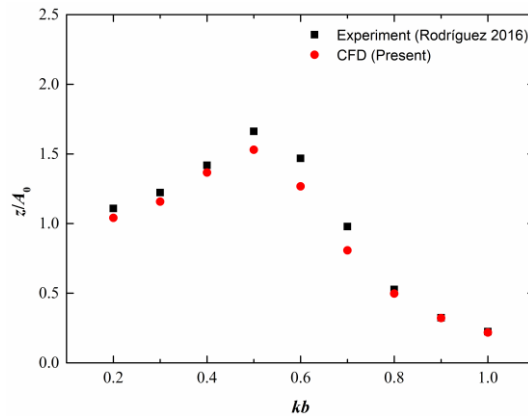


Figure 4: Non-dimensional heave amplitudes ( $z/A_0$ ) of a free-heaving box under incoming Stokes waves.

## RESULTS AND ANALYSIS


To study the effect of the heave motion of downstream section B on the gap resonance, the free surface elevation in the narrow gap is monitored for the *heave system* under the action of incident waves with different wavelengths. Then the Fast Fourier Transform (FFT) method is applied to obtain the harmonics of the responses. Next, the time series of the heave displacement of section B is measured, and its relationship with the vertical force acting on section B is discussed. The harmonic analysis is subsequently carried out for the heave displacement and the results are discussed. Finally, the

flow field of wave A (wave frequency equals to gap-resonant frequency) is demonstrated in the vicinity of the gap to understand the physics of this phenomenon.

## Free Surface Elevations

### Overall Amplifications


The non-dimensional time histories of free surface elevation inside the gap for the *heave system* exposed to two Stokes waves (wave A and wave B) are shown in Figure 5. The corresponding results for the *fixed system* and the incident-wave elevation are also included for comparison. It is observed that the wave elevations in the gap for the *heave system* under both waves are smaller than those for the *fixed system*, and are also smaller than the incident wave amplitudes. Large wave amplitude appears in the gap for the *fixed system* when the wave frequency coincides with the natural frequency of the water bulk within the gap, which demonstrates the occurrence of the gap resonance and the corresponding Response Amplitude Operator (RAO), namely the ratio of amplitude of free surface elevation in the narrow gap to the height of the incident wave, can reach up to 4.6. For incident wave B, the elevation decreases to around 1.5 times the incident wave height for the *fixed system*. It should be noted that the second-order component presents as a result of nonlinear wave-wave and wave-structure interactions in wave case B (wave frequency equals to half-resonant frequency). When the incident wave frequency is close to half the resonant frequency, the second-order wave loads can stimulate the resonant gap response. The wave elevations in the narrow gap for the *heave system* do not show similar trends as those for the *fixed system*. The heave motion of section B absorbs the energy in the gap and modulates the resonant frequency to some extent.

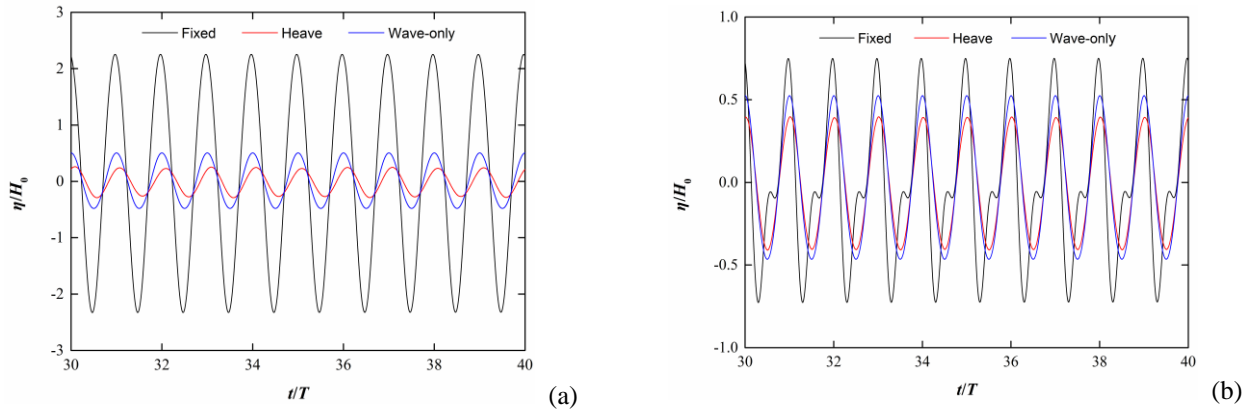

**Figure 5: Time history of the free surface elevation in the gap ( $\eta/H_0$ ) for the *fixed system* and *heave system* under different incident wavelengths: (a) Stokes wave A (resonance); (b) Stokes wave B (half-resonance).**

### Harmonic Analysis

Harmonic analysis is performed to understand the contribution of each frequency component. Figure 6 presents the first three orders of normalized amplitudes of the free-surface elevation in the gap for both the *fixed system* and *heave system* under different incident waves, and the amplitudes of the harmonics are listed in Table 1. It can be seen that the first-harmonic component of wave elevation in the gap is excited in the *fixed system* at the resonance, while the first-harmonic component for the *heave system* remains smaller than the incident wave amplitude. A rather small second-harmonic component can be observed for the *heave system*. When the incident wave frequency is half the resonant frequency, the second-harmonic component is excited in the *fixed system*, and its amplitude can take up 42.4% of the first-harmonic component while the first-harmonic component drops back to a bit larger than that of the incident wave, which is consistent with the conclusion in the previous time-domain result. The second-harmonic component of wave elevation is not stimulated by the incident wave for the *heave system*. This is due to the existence of heave motion of section B, which modulates the frequency of the free surface variation inside the gap and averts the occurrence of second-order excitation.

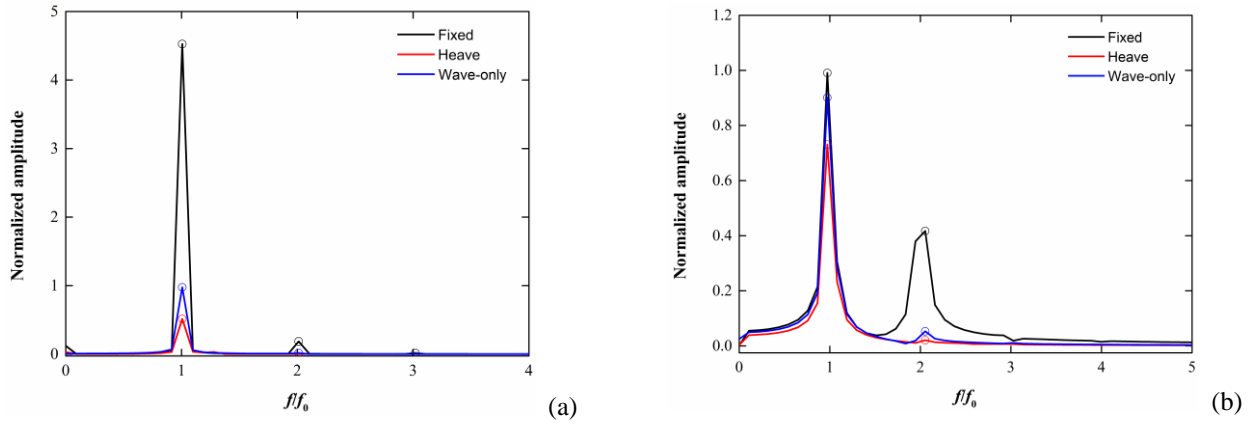

**Figure 6: Normalized amplitude of the free surface elevation in the narrow gap for the *fixed system* and *heave system* under different incident wavelengths: (a) Stokes wave A (resonance); (b) Stokes wave B (half-resonance).**


**Table 1: Normalized harmonic components of wave elevation amplifications in the gap under different incident wavelengths**

$\lambda/h$	$H_g^{(i)}/H_0$ ( $H_g^{(i)}/H_g^{(1)}$ )					
	$i = 1$		$i = 2$		$i = 3$	
	Fixed	Heave	Fixed	Heave	Fixed	Heave
4.044 (wave A)	4.53	0.258	0.19 (4.19%)	0.005 (1.94%)	0.02 (0.44%)	0.001 (0.39%)
9.920 (wave B)	0.991	0.731	0.42 (42.4%)	0.021 (2.87%)	0.03 (3.03%)	0.007 (0.96%)

## Heave Displacements

### Overall Displacements

The heave displacements of section B excited by the incident waves are monitored and analyzed to investigate the relationship between the heave motion and the gap resonance (see Figure 7). The non-dimensional vertical forces acting on section B are also displayed in the figure, where  $A_0 = H_0/2$  denotes the incident wave amplitude. It is obvious that the heave displacement under the action of wave B is larger than that under wave A, while the vertical force is smaller. This is due to the fact that wave B is longer than wave A. A longer wave experiences less diffraction due to the presence of the upstream section, and thus more energy can be transmitted to the downstream to excite the motion of section B.

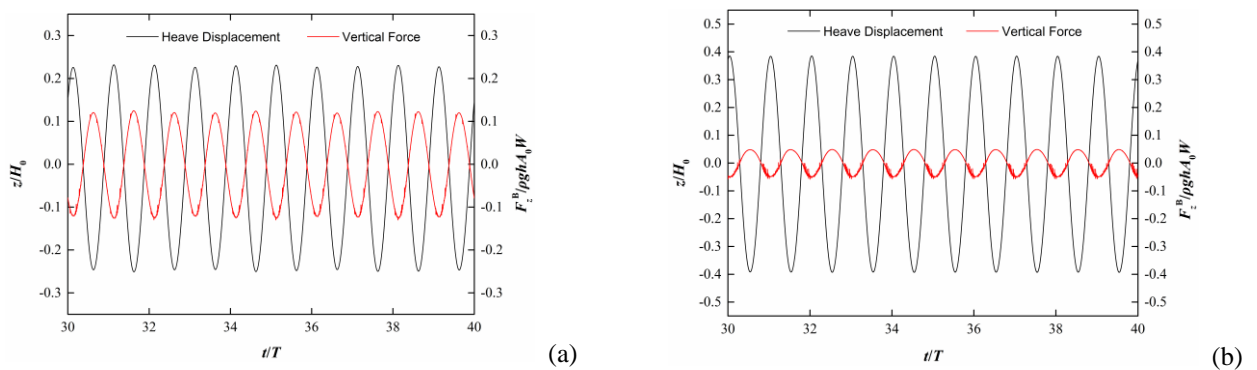

**Figure 7: Time history of the heave displacement and the normalized vertical force of section B under different incident wavelengths: (a) Stokes wave A (resonance); (b) Stokes wave B (half-resonance).**

### Harmonic Analysis

The FFT method is also applied to the heave displacements of section B and the normalized amplitudes of first-, second- and third-harmonics are summarized in Table 2. It is noted that each harmonic of heave displacement is larger under wave B, which also indicates that more energy is transmitted from upstream to excite the heave motion. To link the harmonic components of the free-surface elevation in the gap with those of the heave displacement, the energy transmission alleviates the second-harmonic responses of the wave elevation within the gap for the incident wave B. In




general, the predicted motions of section B which is situated in the sheltered area of section A, are seen to be small. Intuitively, this is also a preferred ship-to-ship configuration in a practical bunkering operation.

**Table 2: Normalized harmonic components of the heave displacements of section B under different incident wavelengths**

$\lambda/h$	$Z^{(i)}/H_0 (Z^{(i)}/Z^{(1)})$		
	$i = 1$	$i = 2$	$i = 3$
4.044 (wave A)	0.474	0.006 (1.29%)	0.002 (0.42%)
9.920 (wave B)	0.710	0.017 (2.25%)	0.004 (0.56%)

## Flow Field Patterns

Additionally, the flow field near the sections for the *heave system* under the incident wave A is investigated to understand the viscous effect involved in the gap resonance. As illustrated in Figure 8, there is stronger vortex shedding at the upstream corners of the large fixed section. Obvious flow separation can be observed in the vicinity of the gap due to the violent piston-type motion of the fluid in the gap. However, the vorticity is much smaller than that for the *fixed system* with two identical sections owing to the sheltering from the upstream large section (details not shown here). Since the downstream section is allowed to move, it may have absorbed some of the energy from the fluid in the gap, which also appears to lead to a smaller liquid response in the gap. By examining the results of gap responses at resonances in Table 1, it seems that the heave motion has exhausted most of the energy accumulated by gap resonance.

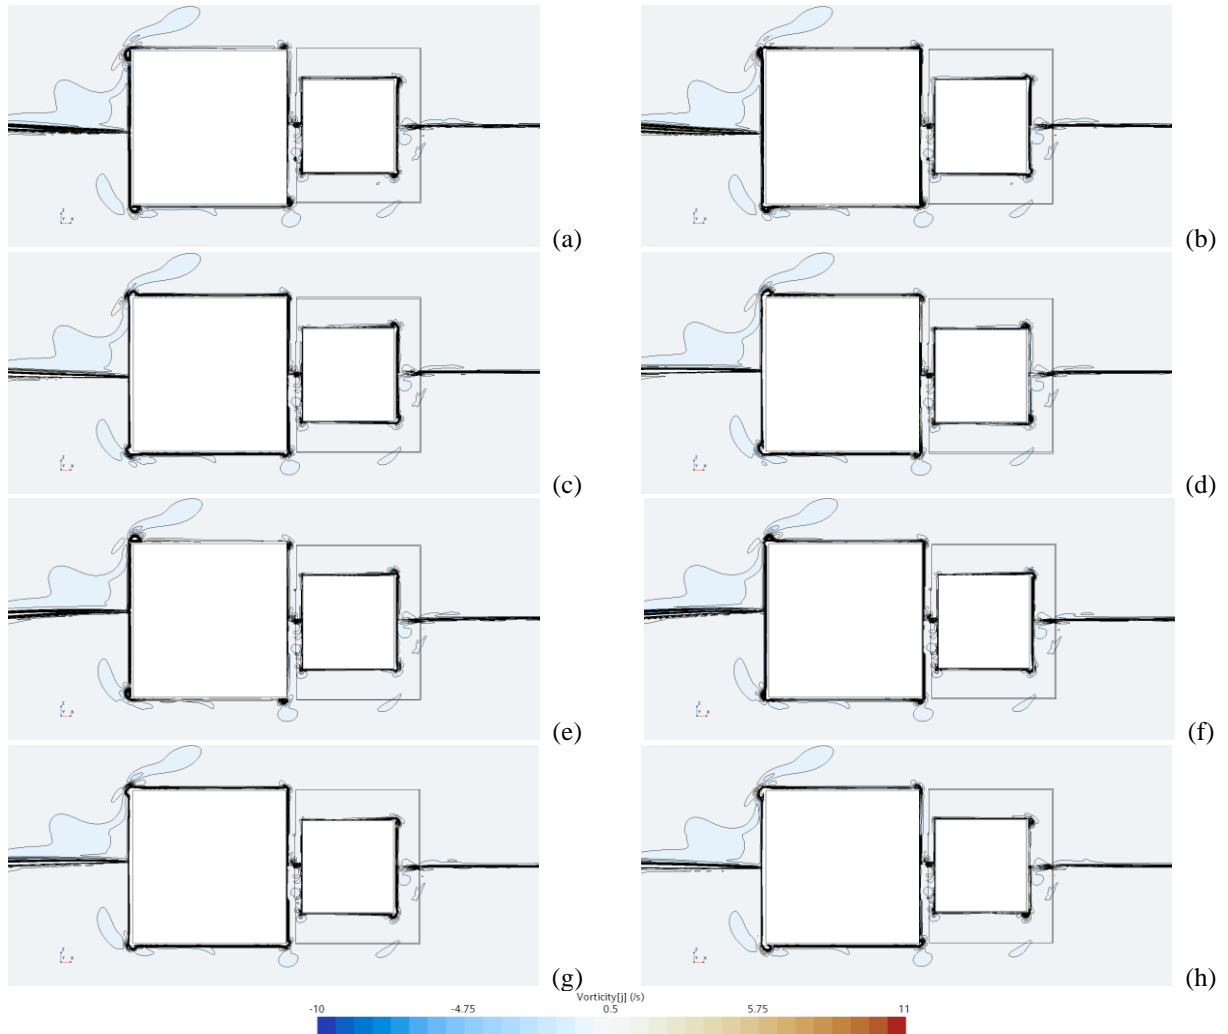

**Figure 8: Vorticity contours near the sections during one period of heave motion in the narrow gap under the incident wave A: (a) 0T/8; (b) 1T/8; (c) 2T/8; (d) 3T/8; (e) 4T/8; (f) 5T/8; (g) 6T/8; (h) 7T/8.**

## CONCLUSIONS

A 2D numerical wave flume is established based on the URANS turbulence model and the VOF method to study the effect of the heave motion on the gap resonance between two non-identical rectangular cross-sections under different incident Stokes waves. The present work considers a more realistic scenario that a bunkering vessel, typically of smaller size, will hide behind a larger receiving vessel. The studied 2D cases are relevant for vessels under beam sea conditions. The free surface elevations inside the gap are compared between cases where the downstream section is either fixed or free to respond in heave. Harmonic components are analyzed to illuminate the frequency relation that incurs high-order resonance. The heave displacements are obtained and their harmonic components are also investigated to study the effect on the gap resonance. Some conclusions are drawn as follows:

- (1) The first harmonics of the free surface elevation decrease with the wavelength for the *fixed system*, and large second harmonics are excited when the incident wave frequency is close to half the resonant frequency. The wave elevation in the gap for the *heave system* does not show a similar trend as that for the *fixed system*, which is due to the existence of the heave motion of the downstream section, thus leading to a modulation of free surface variation in the narrow gap and avoiding the second-order excitation.
- (2) The heave motion under the action of a wave with a larger wavelength is more violent than that with a smaller wavelength. The vertical force acts like a resistance on the heaving section. Small force excited by the longer wave takes more energy from the water inside the gap and reduces the fluid response in the gap.
- (3) As observed from the flow separation near both cross-sections, the sheltering effect achieved by hiding the small floating section behind the large fixed section can reduce the free surface elevation in the narrow gap and decrease the heave displacement to a large extent, which is a more preferred configuration for the bunkering operation at sea.

However, the bunkering operation can also be conducted in shallow water areas where Stokes wave theories are less applicable. Large free surface nonlinearity may also affect the gap response in the narrow gap. This part of the work is not included in the paper but will be presented during the conference.

## ACKNOWLEDGEMENTS

This research was financially supported by China Scholarship Council (CSC No.202006060050) and performed using computational resources sponsored by Technical University of Denmark.

## REFERENCES

- CHUA, K. H., TAYLOR, R. E., and CHOO, Y. S. "Hydrodynamic interaction of side-by-side floating bodies part I: Development of CFD-based numerical analysis framework and modified potential flow model." *Ocean Engineering*, **166** (2018): 404-415.
- FALTINSEN, O. M., FIROOZKOOHI, R., and TIMOKHA, A. N. "Steady-state liquid sloshing in a rectangular tank with a slat-type screen in the middle: Quasilinear modal analysis and experiments." *Physics of Fluids*, **23**:4 (2011): 042101.
- FERZIGER, J. H., PERIĆ, M. *Computational methods for fluid dynamics*. Vol. 3. Berlin: Springer, 2002.
- GAO, J. L., et al. "Topographic effects on wave resonance in the narrow gap between fixed box and vertical wall." *Ocean Engineering*, **180** (2019): 97-107.
- GAO, J. L., et al. "Numerical investigations of wave loads on fixed box in front of vertical wall with a narrow gap under wave actions." *Ocean Engineering*, **206** (2020): 107323.
- GAO, J. L., et al. "Numerical investigations of gap resonance excited by focused transient wave groups." *Ocean Engineering*, **212** (2020): 107628.
- GAO, J. L., et al. "Effects of free heave motion on wave resonance inside a narrow gap between two boxes under wave actions." *Ocean Engineering*, **224** (2021): 108753.
- IWATA, H., SAITOH, T., and MIAO, G. P. "Fluid resonance in narrow gaps of very large floating structure composed of rectangular modules." *Proceedings of the fourth international conference on asian and pacific coasts*, Nanjing, China. 2007.
- JIANG, S. C., BAI, W., and TANG, G. Q. "Numerical investigation of piston-modal wave resonance in the narrow gap formed by a box in front of a wall." *Physics of Fluids*, **31**:5 (2019): 052105.
- JIANG, S. C., and BAI, W. "Coupling analysis for sway motion box with internal liquid sloshing under wave actions." *Physics of Fluids*, **32**:7 (2020): 072106.
- JIANG, S. C., GU, Q., and CONG, P. W. "Fluid resonance in the narrow gap of a box-wall system under cnoidal wave action." *Ocean Engineering*, **238** (2021): 109774.
- JIANG, S. C., BAI, W., and YAN, B. "Higher-order harmonic induced wave resonance for two side-by-side boxes in close proximity." *Physics of Fluids*, **33**:10 (2021): 102113.
- KIM, J., O'SULLIVAN, J., and READ, A. "Ringling analysis of a vertical cylinder by euler overlay method." *International Conference on Offshore Mechanics and Arctic Engineering*. Vol. 44915. American Society of Mechanical Engineers, 2012.

KRISTIANSEN, T. and FALTINSEN, O. M. "Application of a vortex tracking method to the piston-like behaviour in a semi-entrained vertical gap." *Applied Ocean Research*, **30**:1 (2008): 1-16.

KRISTIANSEN, T. and FALTINSEN, O. M. "A two-dimensional numerical and experimental study of resonant coupled ship and piston-mode motion." *Applied Ocean Research*, **32**:2 (2010): 158-176.

LI, Y. J. and ZHANG, C. W. "Analysis of wave resonance in gap between two heaving barges." *Ocean Engineering*, **117** (2016): 210-220.

LI, Y. J. "Fully nonlinear analysis of second-order gap resonance between two floating barges." *Engineering Analysis with Boundary Elements*, **106** (2019): 1-19.

LU, L., et al. "Numerical investigation of fluid resonance in two narrow gaps of three identical rectangular structures." *Applied Ocean Research*, **32**:2 (2010): 177-190.

LU, L., et al. "Modelling of multi-bodies in close proximity under water waves—Fluid forces on floating bodies." *Ocean Engineering*, **38**:13 (2011): 1403-1416.

LU, L., et al. "Two-dimensional numerical study of gap resonance coupling with motions of floating body moored close to a bottom-mounted wall." *Physics of Fluids*, **32**:9 (2020): 092101.

MIAO, G. P. "Influence of gaps between multiple floating bodies on wave forces." *China Ocean Engineering*, **4** (2000): 407-422.

MOLIN, B. "On the piston and sloshing modes in moonpools." *Journal of Fluid Mechanics*, **430** (2001): 27-50.

MORADI, N., ZHOU, T. M., and CHENG, L. "Two-dimensional numerical study on the effect of water depth on resonance behaviour of the fluid trapped between two side-by-side bodies." *Applied Ocean Research*, **58** (2016): 218-231.

MUZAFERIJA, S. and PERIĆ, M. "Computation of Free Surface Flows using Interface Tracking and Interface Capturing Methods,'Chap. 2." *Mahrenholtz, O. and Markewicz, M., Nonlinear Water Wave Interaction, Comput. Mech. Publications* (1999).

NING, D. Z., et al. "Numerical study of resonance induced by wave action on multiple rectangular boxes with narrow gaps." *Acta Oceanologica Sinica*, **34**:5 (2015): 92-102.

NING, D. Z., et al. "Hydrodynamic difference of rectangular-box systems with and without narrow gaps." *Journal of Engineering Mechanics*, **141**:8 (2015): 04015023.

NING, D. Z., et al. "Experimental and numerical study on wave response at the gap between two barges of different draughts." *Applied Ocean Research*, **77** (2018): 14-25.

PERIĆ, M., and SWAN, C. "An experimental study of the wave excitation in the gap between two closely spaced bodies, with implications for LNG offloading." *Applied Ocean Research*, **51** (2015): 320-330.

PERIĆ, M. "Best practices for wave flow simulations." *The Naval Architect International Journal of the Royal Institute of Naval Architects* (2018).

RODRÍGUEZ, M. and SPINNEKEN, J. "A laboratory study on the loading and motion of a heaving box." *Journal of Fluids and Structures*, **64** (2016): 107-126.

SAITOH, T., MIAO, G. P., and ISHIDA, H. "Theoretical analysis on appearance condition of fluid resonance in a narrow gap between two modules of very large floating structure." *Proceedings of the 3rd Asia-Pacific Workshop on Marine Hydrodynamics*. China Ocean Press, 2006.

SUN, L., TAYLOR R. E., and TAYLOR, P. H. "First-and second-order analysis of resonant waves between adjacent barges." *Journal of Fluids and Structures*, **26**:6 (2010): 954-978.

TAN, L. et al. "Dissipative effects of resonant waves in confined space formed by floating box in front of vertical wall." *The Eleventh ISOPE Pacific/Asia Offshore Mechanics Symposium*. OnePetro, 2014.

TAN, L., et al. "A viscous damping model for piston mode resonance." *Journal of Fluid Mechanics*, **871** (2019): 510-533.

ZHAO, W. H., et al. "Estimation of gap resonance relevant to side-by-side offloading." *Ocean Engineering*, **153** (2018): 1-9.

ZHU, H. R., ZHU, R. C., and MIAO, G. P. "A time domain investigation on the hydrodynamic resonance phenomena of 3-D multiple floating structures." *Journal of Hydrodynamics*, **20**:5 (2008): 611-616.