



## **Swelling of clays/shales to ensure underground storage CO2 Seal Integrity**

**Rocchi, Irene; Meireles, Leonardo Teixeira Pinto; Fabricius, Ida Lykke**

*Publication date:*  
2022

*Document Version*  
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*  
Rocchi, I., Meireles, L. T. P., & Fabricius, I. L. (2022). *Swelling of clays/shales to ensure underground storage: CO2 Seal Integrity*. Abstract from Danish Offshore Technology Conference 2022, Kolding, Denmark.

---

### **General rights**

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

## Swelling of clays/shales to ensure underground storage

### CO<sub>2</sub> Seal Integrity

Associate Prof. Irene Rocchi, Dr. Leonardo Teixeira Pinto Meireles and Prof. Ida Lykke Fabricius

Due to their low permeability, shales trap hydrocarbons in the subsurface. They are expected to fulfil the same role when utilizing depleted reservoirs to store CO<sub>2</sub> underground. However, any pathway to surface must be sealed to control CO<sub>2</sub> leakage. The CO<sub>2</sub> Seal Integrity project investigates mechanisms to promote expansion of shales and seal the interface between the formation and casing (Figure 1A) or across the well after milling of the casing (Figure 1B). Restoration of the natural sealing formation could create a barrier that is chemically more stable (upon exposure to CO<sub>2</sub>), and has a lower permeability than cement. Using the shale as a barrier could also be less time consuming and cheaper than standard operations, especially when annular cement has to be repaired through perf-and-wash and cement squeeze jobs.

Samples from the Danish North Sea corresponding to the potential location of plugs are reconstituted to their in situ conditions (density, stress, pore-water chemistry) in large scale setups. Thereafter, a series of specimens are taken and exposed to fluids used in drilling operations (oil based mud, water based mud). Finally, they undergo different treatments aimed at inducing swelling. Throughout the process deformation is measured at a macroscopic scale. Furthermore, microscopic characterization is performed by means of low-field 1-H nuclear magnetic resonance and X-Rays diffraction analysis. The aim is to evaluate different sealing strategies and compare their efficiency in terms of performance and feasibility.

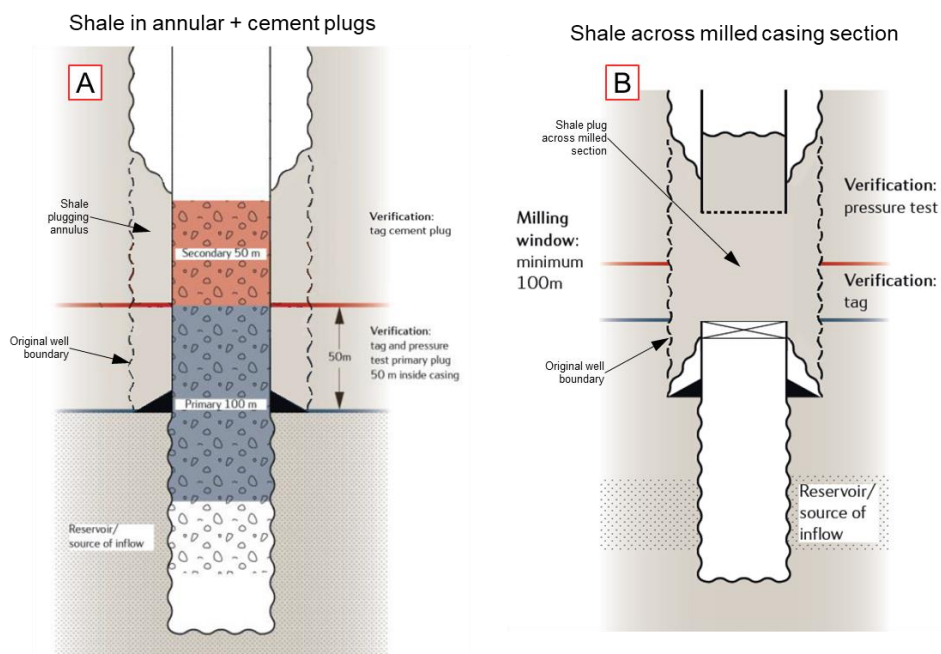


Figure 1 – Applications of shale as a barrier: A) Annular seal. B) Cross sectional seal upon milling casing.  
Adapted from Revision 4 of NORSOK D-010 Well integrity in drilling and well operations