



## Laser triangulation-based thermal characterization of machine tool spindles according to ISO 230-3

Geiselhart, Matthias; Iribarren Indaburu, Andoni ; Arrazola Arrio, Pedrola José; Bissacco, Giuliano

*Published in:*

European Society for Precision Engineering and Nanotechnology, Conference Proceedings

*Publication date:*

2025

*Document Version*

Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*

Geiselhart, M., Iribarren Indaburu, A., Arrazola Arrio, P. J., & Bissacco, G. (in press). Laser triangulation-based thermal characterization of machine tool spindles according to ISO 230-3. In *European Society for Precision Engineering and Nanotechnology, Conference Proceedings: 24th International Conference and Exhibition, EUSPEN 2024* (pp. 563-566). euspen.

---

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

## Laser triangulation-based thermal characterization of machine tool spindles according to ISO 230-3

Matthias Geiselhart<sup>1</sup>, Andoni Iribarren Indaburu<sup>1,2</sup>, Pedro José Arrazola Arriola<sup>2</sup>, Giuliano Bissacco<sup>1</sup>

<sup>1</sup>Technical University of Denmark, Department of Civil and Mechanical Engineering, Nils Koppels Allé B425, 2800 Kongens Lyngby, Denmark

<sup>2</sup>Mondragon University, Faculty of Engineering, Loramendi Kalea, 4, 20500 Arrasate/Mondragon, Spain

mgeis@dtu.dk

### Abstract

To characterize the spindle displacement of a machine tool over time due to the heat generated by the spindle motor during operation, a measurement setup was developed consisting of five laser triangulation sensors arranged according to ISO 230-3. It is based on a modular, lightweight frame with features for quick disassembly for easier transportation and re-assembly with high repositioning accuracy enabling to run the test at different locations on different machines. To localize the laser spot on a rotating tungsten carbide bar, an on-machine laser beam origin and direction detection strategy for laser triangulation sensors was developed. The position of the bar was mapped in the three-dimensional space by a best-fit algorithm. The characterization of the thermal deformation of a machine tool at 15000 rpm over 1.7 hours showed robustness to the underlying laser origin and direction measurements and was demonstrated as suitable tool to analyze machine tool's thermal compensation strategies. The most influential error contributors were identified and discussed.

Machine, Measuring instrument, Precision, Thermal error

### 1. Introduction

To ensure the performance of machine tools and thus the quality of machined parts, the ISO 230 series of standards covers methods and tests for evaluating machine characteristics. ISO 230-3 [1] describes displacement sensor-based tests for characterization of thermal distortions and drifts from rotating spindles. Commercial spindle error analysis systems typically consist of either three or five capacitive displacement sensors, placed in a fixture and measuring on a rotating artifact mounted on the spindle [2,3]. The displacement of the spindle with respect to the machine table in X-, Y-, and Z-direction can be characterized with three sensors, the tilt error movements in the XZ-, and YZ-plane can be characterized with one additional sensor each in the X- and Y-direction at known distances.

A versatile test setup to characterize machine tools according to ISO 230-3 consisting of five laser triangulation sensors (LTS) on a compact modular frame allowing for easy handling and assembly with high repositioning accuracy was developed. LTSs have been selected because they are insensitive to the shape and material of the target and are suitable for high-resolution non-contact measurements at high rotational speeds of the measured object at sampling rates up to 50 kHz and are less expensive compared to other high performance measurement technologies.

### 2. Methodology

#### 2.1. Laser triangulation sensor

LTS are typically used for displacement, position, thickness, or dimensional measurements as they offer high resolution down to 30 nm, high linearity of 600 nm, a small beam spot size, long measuring ranges, high reference distance between sensor and target reducing the risk of damage during setup, and independence on the target material [4]. However, the relatively large sensor compared to confocal, capacitive or eddy current

sensors makes the setup bulkier and a relatively clean optical path is required for reliable operation.

The distance measuring technique is based angle calculation and illustrated in Figure 1. A laser beam is projected onto the object to be measured. The distance to the object is determined using the known distance from the transmitter to the receiving element and the angle of reflection of the laser beam on the receiving element. Its components are assembled in an aluminum casing, among which the laser diode and processing unit are potential heat sources. The thermal behavior of the LTSs used was investigated. The results are presented in Section 3.

Five LTSs type optoNCDT ILD-2300-2 from Micro-Epsilon with 670 nm wavelength, mid of measuring range (MMR) at 25 mm, 2 mm measurement range, 30 nm resolution and a maximum sampling rate of 49 kHz were used [4], operated in diffuse mode without any filter nor averaging.

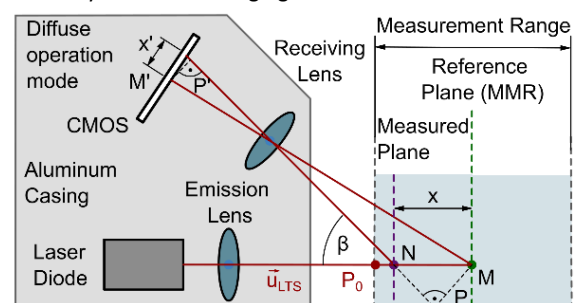


Figure 1. Laser triangulation principle in diffuse mode.

#### 2.2. Modular frame

A modular, lightweight frame concept shown in Figure 2 was developed and additively manufactured from tool steel. Each sensor is permanently fixed in its own bracket with machined reference surfaces allowing for further use of the sensors in other measurement setups without losing their positions within the brackets. Three ceramic spheres per measurement direction are fixed on the frame. The brackets are attached to the frame with magnets that align with the ceramic spheres allowing the



LTSs. Spindle speed is selected to the operator's choice. The distance signals, sampled at 20 kHz, contain the oscillation resulting from the radial runout of the bar and noise due to optical effects on the bar surface. Such oscillations are canceled out by averaging the signal every 0.5 seconds, thus a data point contains multiple rotations. A resolution of 2 Hz is sufficient to characterize the thermal behavior of a machine tool.

As five points on the bar are known in space, the rotational axis of the spindle at any time instance is calculated by fitting a cylinder with 10 mm diameter to the four points measured in X- and Y-direction. The displacements in X- and Y- direction are calculated at two constant Z-heights, called L2 between  $Z_{Y2}$ ,  $Z_{X2}$  and L1 for  $Z_{Y1}$  and  $Z_{X1}$ . The angular drift to the initial spindle position is calculated through the differential displacements at L1 and L2. The displacement in Z is calculated by the intersection of the rotation axis with its normal plane through the point measured in Z. This method enables continuous measurement of the spindle rotation axis instead of assuming its position.

### 3. Results

#### 3.1 Thermal stability of LTS

One LTS was clamped on a granite table measuring the distance towards a granite block over 16,5 hours in a temperature-controlled environment, as shown in Figure 4a. The ambient temperature was measured by the Extech RHT20 temperature datalogger with a resolution of 0.1 K and the temperature on the sensor housing with a thermocouple logged with a NI-9213 module with a resolution of 0.3 mK. The results are shown in Figure 4b. The LTS stabilizes after a heat up phase of 2 hours and a distance offset of 10.5  $\mu\text{m}$ . The decrease in the ambient temperature of 0.8°C over the remaining measurement period led to a concurrent temperature decrease on the sensor casing by 1.0°C and an increase in the measured distance to the granite block by 1.5  $\mu\text{m}$ . It is considerably greater than the temperature stability of  $\pm 0.01\%$  FSO/K specified by the manufacturer [4], which corresponds to 0.2  $\mu\text{m}$ , as it also includes the shrinkage of the measurement setup.

#### 3.2 Direction and origin detection

The measurement setup was placed on the table of a 3-axis machine tool. The laser direction and origin were determined twice for all five LTSs according to the method described in section 2.3, labeled as run 1 (r1) and run 2 (r2). The variation in X, Y and Z of the laser origins  $P_0$  and laser direction unit vectors  $u$  and the resulting distance  $d$  and angle  $\alpha$  between the laser beam pairs are listed in Table 1. The maximum deviation between the two measurements is 4.7  $\mu\text{m}$  and 168 arc seconds.

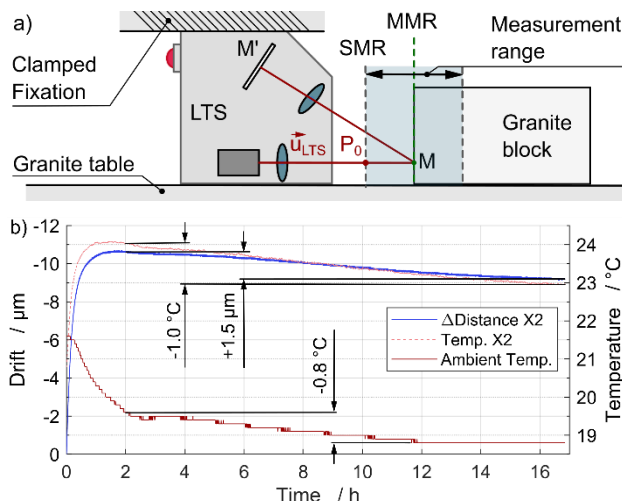


Figure 4. Thermal drift measurement of LTS X2: a) setup; b) results.

Table 1 Difference between two consecutive LTS calibration runs.

	$\Delta P_{0,x}$	$\Delta P_{0,y}$	$\Delta P_{0,z}$	$d$	$\Delta u_x$	$\Delta u_y$	$\Delta u_z$	$\alpha$
	$\mu\text{m}$	$\mu\text{m}$	$\mu\text{m}$	$\mu\text{m}$	$\cdot 10^{-4}$	$\cdot 10^{-4}$	$\cdot 10^{-4}$	arc sec
X1	-0.7	0.2	0.4	0.9	0.0	-0.6	3.8	78
X2	-0.6	0.6	1.5	1.7	-0.0	1.9	-1.9	55
Y1	0.4	-1.7	0.4	1.8	0.0	0.0	4.4	90
Y2	0.1	4.7	0.4	4.7	-1.3	0.0	1.3	36
Z	2.1	-1.1	-3.7	4.4	-8.1	0.6	-0.0	168

#### 3.3 Spindle drift over time


The setup was used to characterize the spindle displacement and inclination and the efficiency of the thermal compensation strategy of a 3-axis machine tool with a C frame construction at 15000 rpm. The measurement was performed on a calibrated 10 mm carbide bar over 104 minutes with a cold spindle at the start. After 101 minutes, the compensation in Z-direction, and after 102 minutes the compensation in Y-direction were deactivated. The results are evaluated for three laser position sets, r1 and r2 and the theoretical LTS positions according to the CAD model (CAD), on which the bar position in space cannot be corrected.

The spindle displacements in X-, Y-, and Z-direction are shown in Figure 5a, the spindle inclination in XZ- and YZ-plane in Figure 5b and the difference in displacements over time compared to laser position set r2 in Figure 5c. The zero point was set to 0.75 sec, where full rotational speed was reached. However, the zero point depends on the residuals of the fit, which is highest in the first few points, which can lead to a jump in the curves at the beginning. The results for the two probed LTS position sets in space r1 and r2 agree well and their difference ( $\Delta X_{1,r1}$ ,  $\Delta X_{2,r1}$ ,  $\Delta Y_{1,r1}$ ,  $\Delta Y_{2,r1}$ ) is of the same magnitude of the residuals of the cylinder fit on the four points in space.

The correction due to the probed laser positions in space (r2) can be seen in the difference to the CAD results compensating for the errors due to off-center measurements positions on the bar to the extent of 2  $\mu\text{m}$  at Y1 and 1  $\mu\text{m}$  at X1 over the first 101 minutes. In this period, the results display the residuals of the machine thermal compensation strategy at 15000 rpm and after 102 minutes the uncompensated spindle position. The spindle displacement by 9  $\mu\text{m}$  due to the deactivation of the compensation in Y is 1  $\mu\text{m}$  less than displayed in the machine control but is only attributed to  $Y_{L1}$  and  $Y_{L2}$  when correcting for the LTS positions in space, compared to 1.8  $\mu\text{m}$  in  $X_{1,CAD}$  and  $X_{2,CAD}$ . The largest spindle displacement occurs in the Z-direction, which amounts to 19.3  $\mu\text{m}$  after 101 minutes and increases to 48.6  $\mu\text{m}$  after deactivating the compensation. The drop by 29.3  $\mu\text{m}$  agrees well with the 29  $\mu\text{m}$  displayed in the machine control. The correction in Z due to the inclination of the front surface of the bar and of centered measurement position is negligibly small. The inclination curves for the two probed LTS position sets in space r1 and r2 in Figure 5c agree well. The gradual rise of inclination in the YZ-plane  $\alpha_{YZ}$  by 25 arc seconds is twice as large as the inclination in XZ-plane by -12 arc seconds.

### 4. Discussion and Conclusion

The presented setup, the measurement method and the data analysis are subject to uncertainties. The establishment of the uncertainty budget is ongoing work. The goal is to perform a spindle thermal characterization with full uncertainty budget. The most influential error contributors, specifically the ambient temperature, machine tool repositioning accuracy, sensor specific errors such as speckle noise and inclination error have been identified and are briefly discussed in the following. The measurement setup used is subject to thermal effects. To avoid the drift during the start phase of the sensors, shown in

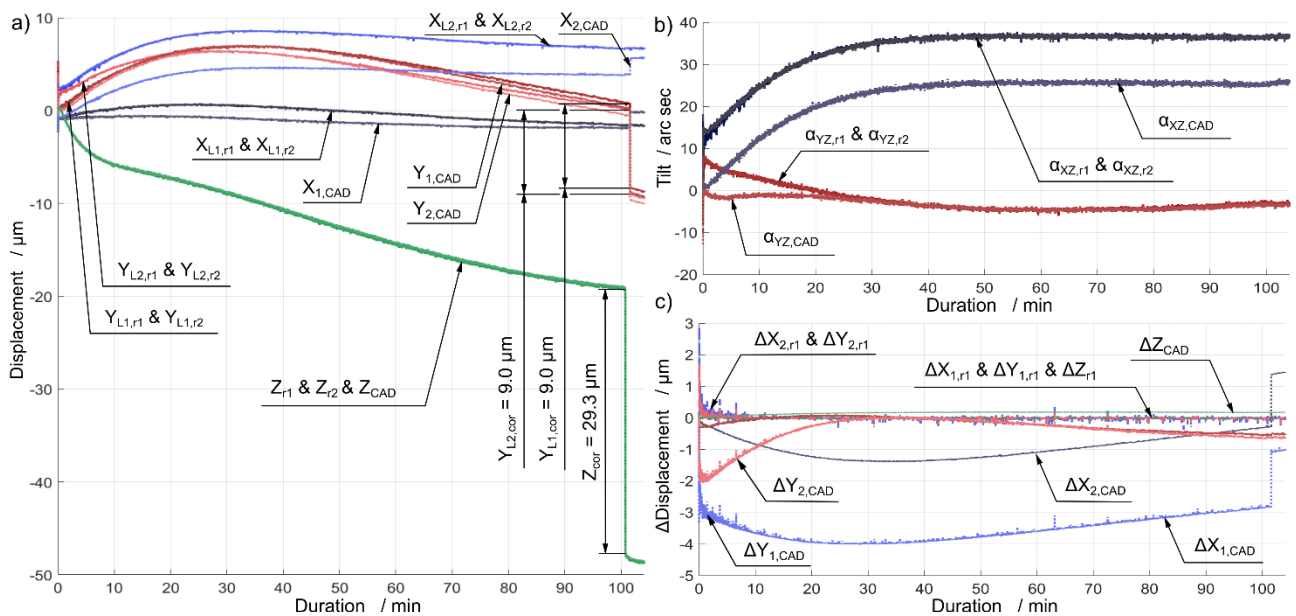

**Figure 5.** Thermal drift measurements of spindle displacement at 15000 rpm in relation to laser positions probed on-machine in run 1 (r1), reference run 2 (r2), and positions in the CAD-model (CAD): a) Displacements; b) Angular tilt; c) Difference of displacement values to reference run 2 (r2).

Figure 4b, the sensors must be switched on 2 hours prior to the measurements. In addition, the frame and the tool steel brackets expand when the temperature changes during the measurements. For reference, the expansion of the frame made of tool steel with a coefficient of thermal expansion (CTE) of  $10 \mu\text{m}/(\text{m K})$  [7] in X, Y, and Z for 1 K uniform temperature change is  $2,1 \mu\text{m}$ ,  $2,4 \mu\text{m}$ , and  $1,3 \mu\text{m}$ . This will be addressed in a future step where the frame will be equipped with thermocouples to continuously record the temperature during the measurement. By simulating the thermal expansion of the setup using the finite element method (FEM), from the results of which a metamodel can be derived, the deformation of the frame structure and thus the displacement of the sensors as a function of temperature can be calculated and compensated for in real time. Nevertheless, at present, great attention should be paid to temperature stability in the measuring room.

There are sensor-specific limitations to the data acquisition accuracy of LTSs. Inclination errors due to a non-perpendicular alignment of the laser beam to the inspected surface can be quantitatively calculated based on a mathematical model derived from the optical triangulation principle, the object equation of the optical path relationship and the deviation of the laser point center allowing to compensate for the error [8]. The speckle effect is a granular noise on the analyzed light spot texture degrading the signal quality of coherent imaging systems as a consequence of interference among wavefronts on surfaces [9]. This error is superimposed as noise on the signal with amplitudes depending on the object's surface topography [10], and is repeatable due to the optical interference as a result of the surface characteristics. On rotating objects, such as the calibrated bar during the presented thermal drift measurement, the repeating pattern of the speckle noise per rotation is canceled out. The influence of speckle noise on the data analysis can be further reduced by low-pass filtering of the measurement signal [7], and calibrated measurement objects with surface roughness values between  $0.4 \mu\text{m}$  to  $3 \mu\text{m Sa}$  [10].

A crucial part of the presented method is the assessment of the LTS alignment quality and repeatability to determine its influence on the measured quantities which despite the speckle effect is also influenced by the machine positioning accuracy. While machine tool positioning accuracy affects the estimation of the laser beam directions and thus of the spindle thermal deformation, spindle thermal compensation with an accuracy

better than the machine positioning accuracy is not required as finer displacements cannot be controlled by the machine.

The runout and speckle noise contributions are removed in the presented data analysis by averaging the sensor signal over a period of 0.5 sec containing 125 spindle rotations.

The presented frame setup has proven its viability as a robust and cost-effective solution to characterize spindle elongation in machine tools and characterization of compensation strategies according to ISO 230-3. Tests have been performed at different industrial partners in the context of the Erasmus+ project PREFAM [11], proving suitability for machine spindle thermal characterization as well as educational on-site activities.

#### Acknowledgement

This work was supported by the project PREFAM, co-funded by the Erasmus+ Programme of the European Union (project number: 2019-1UK01-KA202-061922).

#### References

- [1] ISO 230-3:2007, Test code for machine tools - Part 3: Determination of thermal effects, 2007.
- [2] Lion Precision Inc., Machine Tool Inspection, 2024.
- [3] IBS Precision Engineering GmbH, Spindle measurement tools analyzer systems, 2024.
- [6] MICRO-EPSILON MESSTECHNIK GmbH & Co. KG, Instruction Manual optoNCDT 2300, 2023.
- [4] Ding, D et al., Research progress of laser triangulation on-machine measurement technology for complex surface: A review, Measurement: J of Int Meas Conf, 2023.
- [5] Ibaraki S et al., Formulation of influence of machine geometric errors on five-axis on-machine scanning measurement by using a laser displacement sensor, J of Man Sci & Eng, ASME, 2015.
- [7] Cverna F and Materials Properties Database Committee, ASM Ready Reference: Thermal Properties of Metals, 2002.
- [8] Dong Z, Measurement of free-form curved surfaces using laser triangulation, Sensors 2018.
- [9] Dorsch R G et al., Laser triangulation: fundamental uncertainty in distance measurement, 1994.
- [10] Ding D et al., Error Modeling and Path Planning for Freeform Surfaces by Laser Triangulation On-Machine Measurement, IEEE Trans Instrum Meas, 2021.
- [11] Phillips D. et al., The PREFAM project: towards the European framework for continuous professional development in precision engineering for advanced manufacturing, euspen ICE2021, 2021.