



Specialty fibers for 160, 320 and 640 Gb/s signal processing

Oxenløwe, Leif Katsuo; Berg, Kim Skaalum; Clausen, Anders; Seoane, Jorge; Siahlo, Andrei; Jeppesen, Palle; Schmidt, M.; Schilling, M.; Le, Nghi Trong Quang

Published in:
Technical Digest Conference on Lasers and Electro-Optics 2004

Publication date:
2004

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Oxenløwe, L. K., Berg, K. S., Clausen, A., Seoane, J., Siahlo, A., Jeppesen, P., Schmidt, M., Schilling, M., & Le, N. T. Q. (2004). Specialty fibers for 160, 320 and 640 Gb/s signal processing. In *Technical Digest Conference on Lasers and Electro-Optics 2004* (Vol. Paper CThQ1). IEEE.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Specialty fibers for 160, 320 and 640 Gb/s signal processing

L.K. Oxenløwe, K.S. Berg, A.T. Clausen, J. Seoane, A.I. Siahlo and P. Jeppesen

COM Center, Technical University of Denmark, Building 345V, DK-2800 Lyngby, Denmark

Phone: +45 45253784, Fax: +45 45936581, E-mail: lo@com.dtu.dk

M. Schmidt, M. Schilling

Alcatel Research and Innovation, Holderaeckerstr. 35, D-70499 Stuttgart, Germany

Q. Le

OFS Fiuel Denmark I/S, Priorparken 680, DK-2605 Brøndby, Denmark

Abstract: Specialty highly non-linear fibers are experimentally characterized as signal processing components in ultra high-speed OTDM systems. Pulse compression to 359 fs and demultiplexing of 160, 320 and 640 Gb/s signals are demonstrated.

©2003 Optical Society of America

OCIS codes: (060.4510) Optical communications (060.2360) Fiber optics links and subsystems

1. Introduction

Ultra high-speed OTDM communication systems with channel rates approaching 640 Gb/s [1] require fast switches and narrow pulses, which may be obtained with non-linear fibers.

In this paper, we use specialty highly non-linear fibers (HNLf) for compression of a 4 ps optical pulse to 359 fs, and demultiplexing of 160, 320 and 640 Gb/s OTDM data signals.

2. Principle and experimental set-up

Figure 1 shows the experimental set-up. The HNLfs used have a flat dispersion profile (slope ~ 0.017 ps/nm²km, zero dispersion at 1559 nm) and a non-linear coefficient of $\gamma \sim 10$ W⁻¹km⁻¹.

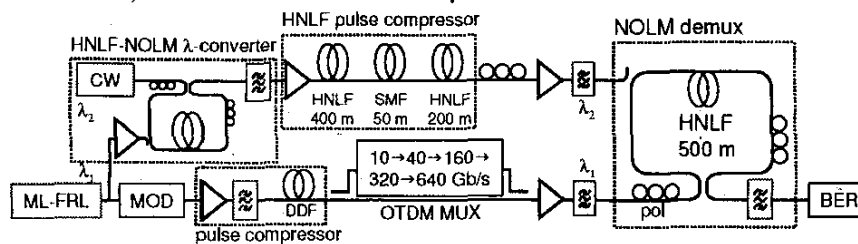


Fig. 1. Schematic set-up.

A mode-locked fiber ring laser (ML-FRL) provides pulses with FWHM of 2.1 ps at a repetition rate of 10 GHz at λ_1 , ~ 1556 nm. The pulses are used for the data and to generate the control for the demultiplexer. The data part is modulated (MOD) and compressed through adiabatic soliton compression in a dispersion decreasing fiber (DDF) [2], and multiplexed to a bit rate of 160, 320 or 640 Gb/s in a planar lightwave circuit multiplexer [3]. The multiplexed pulses are transform limited with a FWHM of 600 fs. Demultiplexing takes place in a non-linear optical loop mirror (NOLM) with a single piece of 500 m HNLf. The control pulses ($\lambda_2 \sim 1540$ nm) are obtained through wavelength conversion in a second NOLM including 400 m HNLf. The control pulses are compressed in the HNLf-based pulse compressor, consisting of segments of HNLf alternating with SMF (a comb-like dispersion profiled fiber (CDPF) [4]) resulting in quasi-adiabatic soliton compression.

3. Characterizations and BER performance

Figure 2 shows CDPF pulse compression from 3.9 ps to 359 fs. The segments are 200 m HNLf, 20 m SMF and 100 m HNLf, i.e. only 320 m in total. The time-bandwidth product is 1.1 times the transform limit.

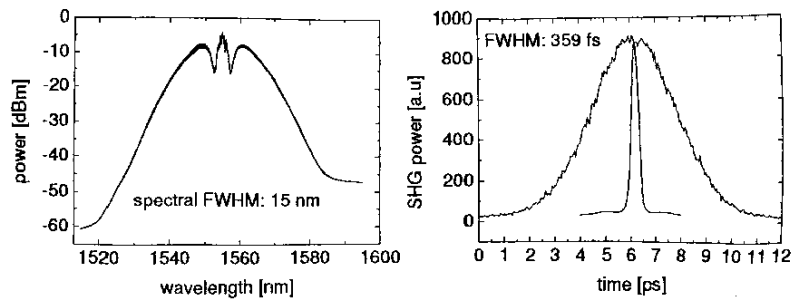


Fig. 2. Left: Spectrum of compressed pulse. Right: Autocorrelations of the input (3.9 ps) and the output (359 fs) pulses.

Fig. 3 shows the multiplexed data and the demultiplexed eye diagrams together with BER curves. From all bit rates it is possible to obtain open eye diagrams (fig. 3 left (bottom)).

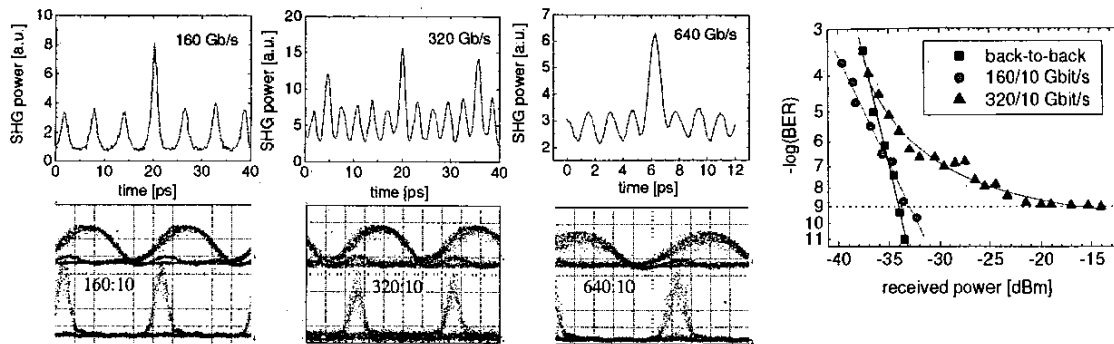


Fig. 3. Left: 160, 320, 640 Gb/s autocorrelation traces (top) and demultiplexed 10 Gb/s eyes (bottom). Right: BER curves.

The 160 and 320 Gb/s demultiplexed eyes are error free and the 640:10 Gb/s demux eyes are promising, but limited by timing jitter of the pulse source (400 fs).

4. Conclusion

We have described the use of new dispersion flattened highly non-linear fibers for pulse compression (down to 359 fs) and demultiplexing of up to 640 Gb/s data.

5. References

1. M. Nakazawa, T. Yamamoto, K.R. Tamura, "1.28Tbit/s-70km OTDM transmission using third- and fourth-order simultaneous dispersion compensation with a phase modulator," *Electron. Lett.* **36**(24), page 2027-2029 (2000)
2. M.D. Pelusi, H.-F. Liu, "Higher order soliton pulse compression in dispersion-decreasing optical fibers," *J. Quantum Electron.*, **8**(33), pp 1430-1439, (1997)
3. M. Schilling, O. Blume, L.-H. Nguyen, M. Schmidt, E. Lach, "OTDM planar lightwave components (plcs) for multiplexing from 40 Gb/s to 80 - 640 Gb/s," in proceedings of LEOS 2002, paperThBB5, 2002
4. M. Tadakuma, O. Aso, S. Namiki, "A 104 GHz 328 fs soliton pulse train generation through a comb-like dispersion profiled fiber using short high nonlinearity dispersion fibers," in proceedings of OFC 2000, paper ThL3-1, 2000