



Biorefinery

The only way for sustainable biofuel production from energy crops; conversion of lignocellulose to bioethanol, biohydrogen and biomethane

Angelidaki, Irini; Kongjan, Prawit

Publication date:
2008

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):

Angelidaki, I., & Kongjan, P. (2008). *Biorefinery: The only way for sustainable biofuel production from energy crops; conversion of lignocellulose to bioethanol, biohydrogen and biomethane*. Abstract from Bioenergy: Challenges and Opportunities. International Conference and Exhibition on Bioengineering, 6-9 april 2008, Universidade do Minho, Guimaraes, Portugal, Braga, Portugal.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal






If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Proceedings of the

Bioenergy:

Challenges and Opportunities

International Conference and Exhibition on Bioenergy

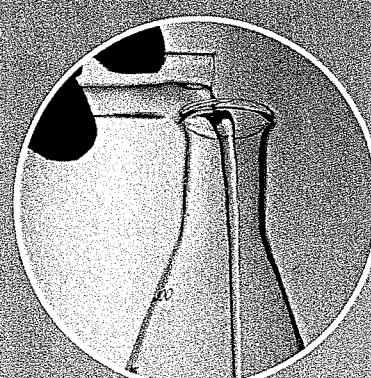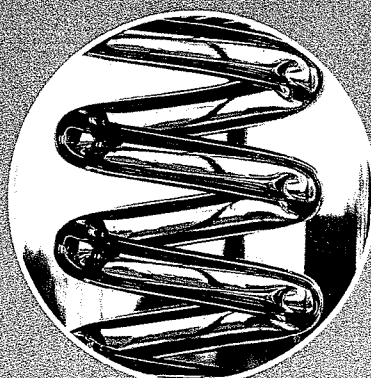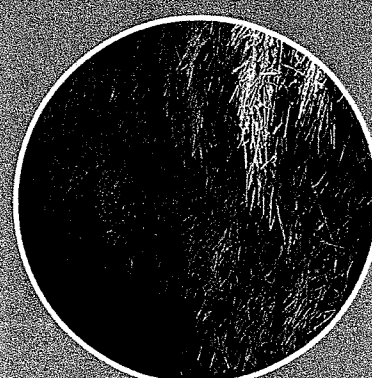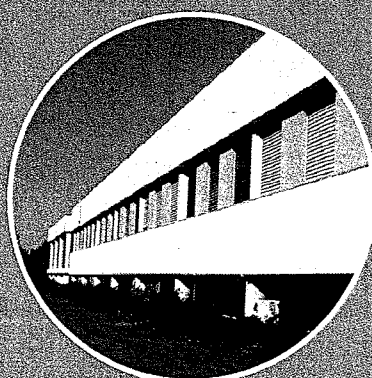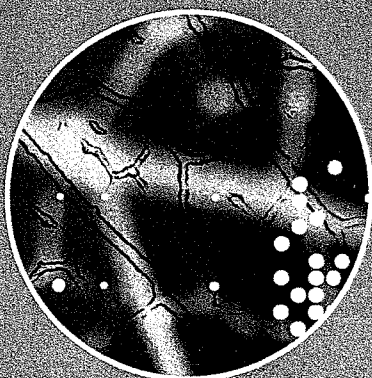

BIOREFINERY: THE ONLY WAY FOR SUSTAINABLE BIOFUEL PRODUCTION FROM ENERGY CROPS; CONVERSION OF LIGNOCELLULOSE TO BIOETHANOL, BIOHYDROGEN AND BIOMETHANE

Irini Angelidaki and Prawit Kongjan

Institute of Environmental Engineering DTU, Technical University of Denmark, Building 113, DK-2800, Kgs. Lyngby, Denmark

Sustainable production and utilization of biofuels has an enormous potential for the world's energy supply. Most research studies usually focus on individual conversion processes and specific end-products. To gain full benefits however, it is important to investigate production and utilization cycles in an integrated way and to consider all important aspects involved: e.g. crop production, residues, supply chain, flexibility of end-products, and environmental aspects. Agricultural residues are excellent examples of crops with a large potential for flexible production of several end-products, such as: bioethanol, biohydrogen, biogas as well as biopolymers. In this multidisciplinary study we tried to integrated innovative approaches to produce a multi-product biofuel from these important crops based on a number of novel and mutually synergistic production methods, and at the same time include an assessment on the environmental benefits and drawbacks related to the concept. The combined production methods will significantly simplify the overall production process and thereby substantially reduce the product costs and the environmental impacts. The scheme for multi-product biorefinery process that is under investigation is including the following steps: pretreatment of lignocellulosic biomass for release of carbohydrates; conversion of hexoses to bioethanol; conversion of pentoses to biohydrogen and finally wastestreams treatment in anaerobic biogas reactors for production of biogas. In the present paper we show that pretreated lignocellulosic material could successfully be converted to bioethanol (for the solids hexoses part) with a yield of 90-100% and to biohydrogen for the hydrolysate mainly containing the pentoses with a specific yield of 2.95 mmoleH₂/gVSadded. The hydrolysate was converted to hydrogen in a thermophilic process using continuous stirred tank (CSTR). A productivity of 113 ml H₂/(d·l) was achieved from the CSTR reactor experiments. The effluents of the process could be converted to methane in a CSTR reactor. The present study shows that it is possible to extract different biofuels from lignocellulosic material in order to optimize for the highest value products in a chain different production steps, where all available organic material is optimally utilized.