



Numerical modeling of parallel-plate based AMR

Nielsen, Kaspar Kirstien; Pryds, Nini; Engelbrecht, Kurt

Publication date:
2008

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Nielsen, K. K. (Author), Pryds, N. (Author), & Engelbrecht, K. (Author). (2008). Numerical modeling of parallel-plate based AMR. Sound/Visual production (digital)

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Numerical modeling of parallel-plate based AMR

Kaspar K. Nielsen^{a,b}, K. Engelbrecht^b and N. Pryds^b.

^{a)} Technical University of Denmark, Department of Mechanical Engineering.

^{b)} Risø National Laboratory for Sustainable Energy, Technical University of Denmark.

Outline

- The Danish effort in magnetic refrigeration
- Focus on the modeling
- Results from both experiment and modeling
- Discussion

Risø's work on magnetic refrigeration

Partnership between




Duration: 4 years

- Starting date: 01.01.2007
- Ending date: 31.12.2010

Funding: €2.6M


- 5 Ph.D. students
- 3 Postdocs

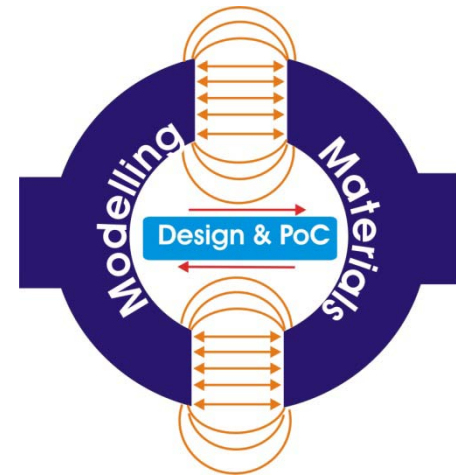


Challenges

Demonstrate cost-effective systems at commercially relevant temperature spans with high efficiency and environmentally friendly materials


Configuration of our effort

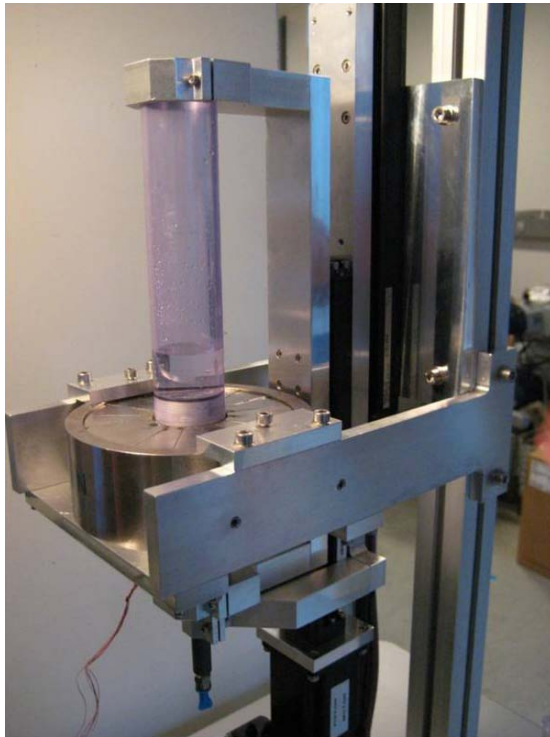

Development of prototype

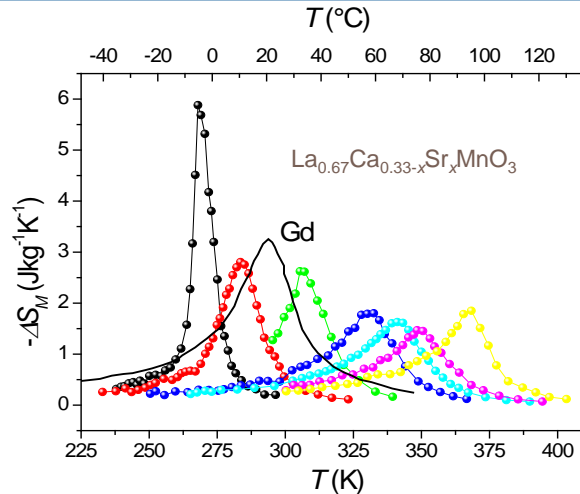


Modeling of both AMR and permanent magnet

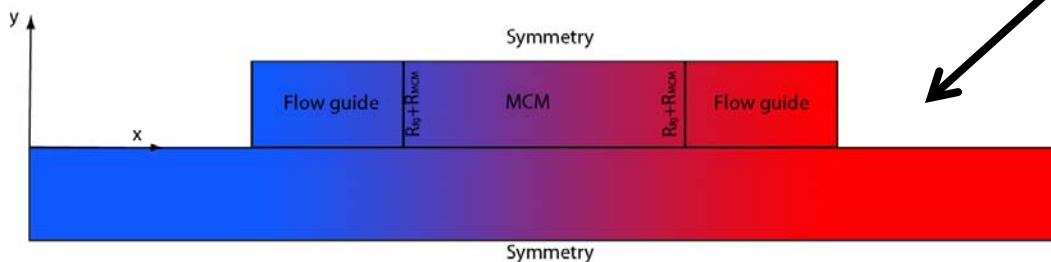

Materials research:


- New materials
- Characterization, evaluation and processing of relevant materials

Linear system
Halbach cylinder

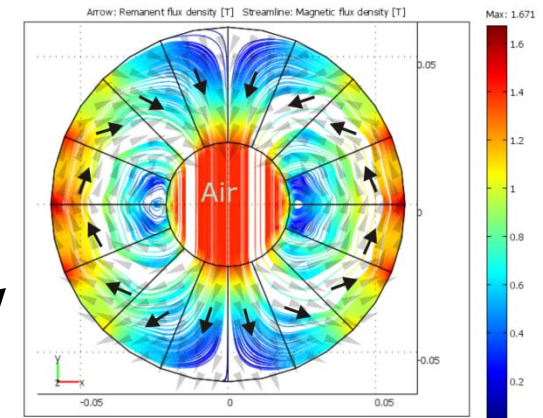

Details on the experiment

- Parallel plate based AMR
- Reciprocating
- Permanent magnet
- Materials used include Gd and LaCaSrMnO_3
- Plate thickness from 0.3 to 0.9 mm
- Channel thickness from 0.5 to 1.0 mm


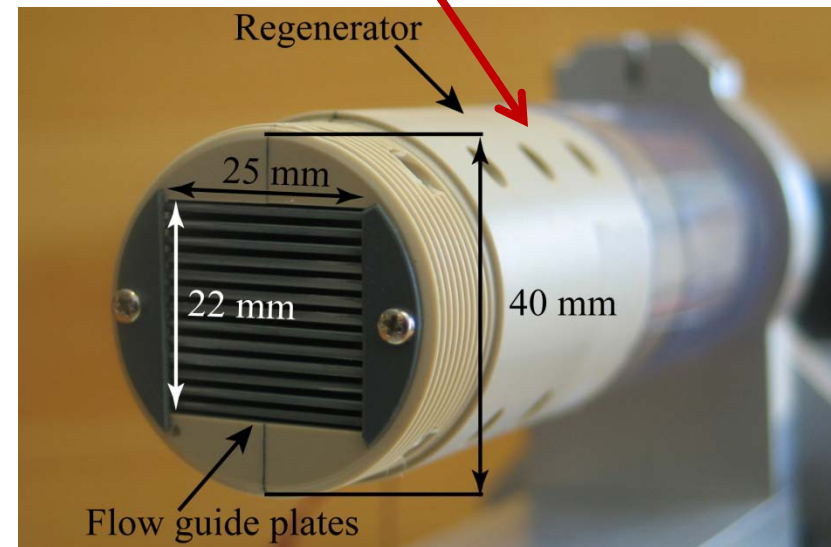


Plates for the regenerator

Example of $\text{La}_{0.67}\text{Ca}_{0.26}\text{Sr}_{0.07}\text{Mn}_{1.05}\text{O}_3$ plates
(40x25x0.3 mm)



The permanent Halbach magnet

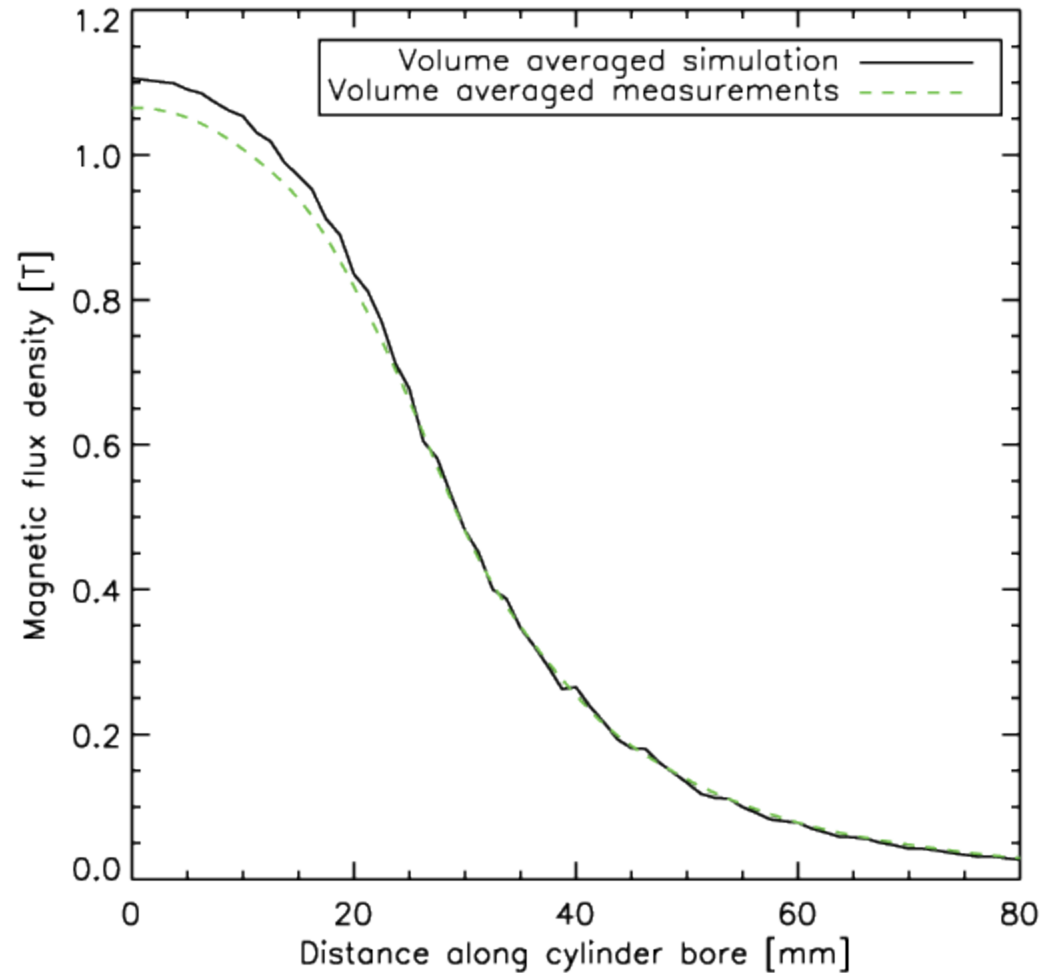
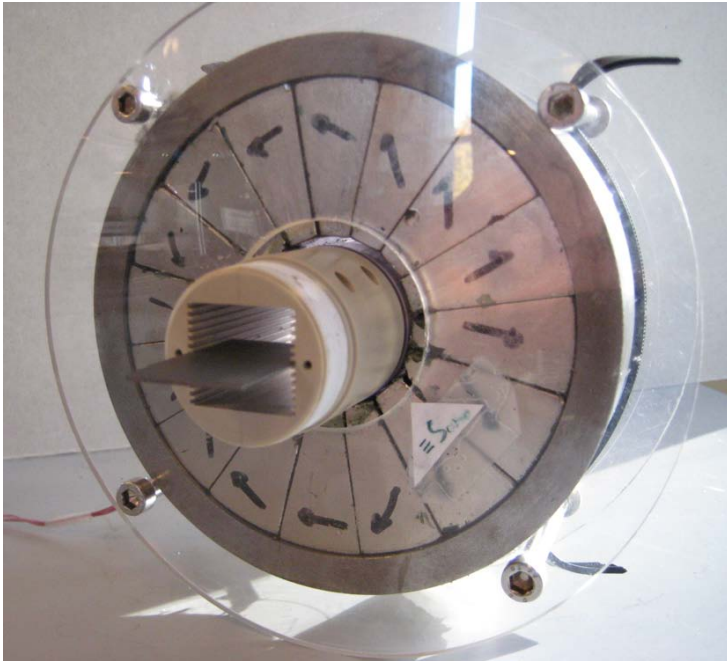


Numerical AMR modeling

Key features of our numerical AMR model

- 2.5-dimensional
- Parallel-plate based
- Versatile
- Fast!

Schematic of the model

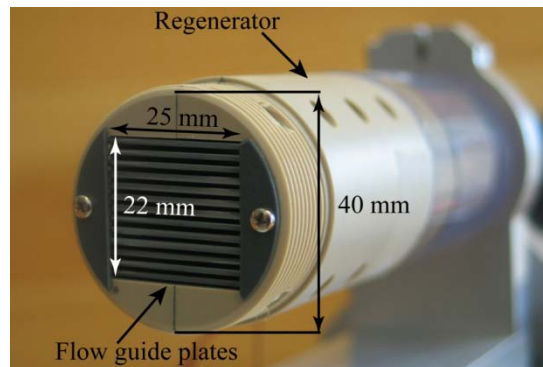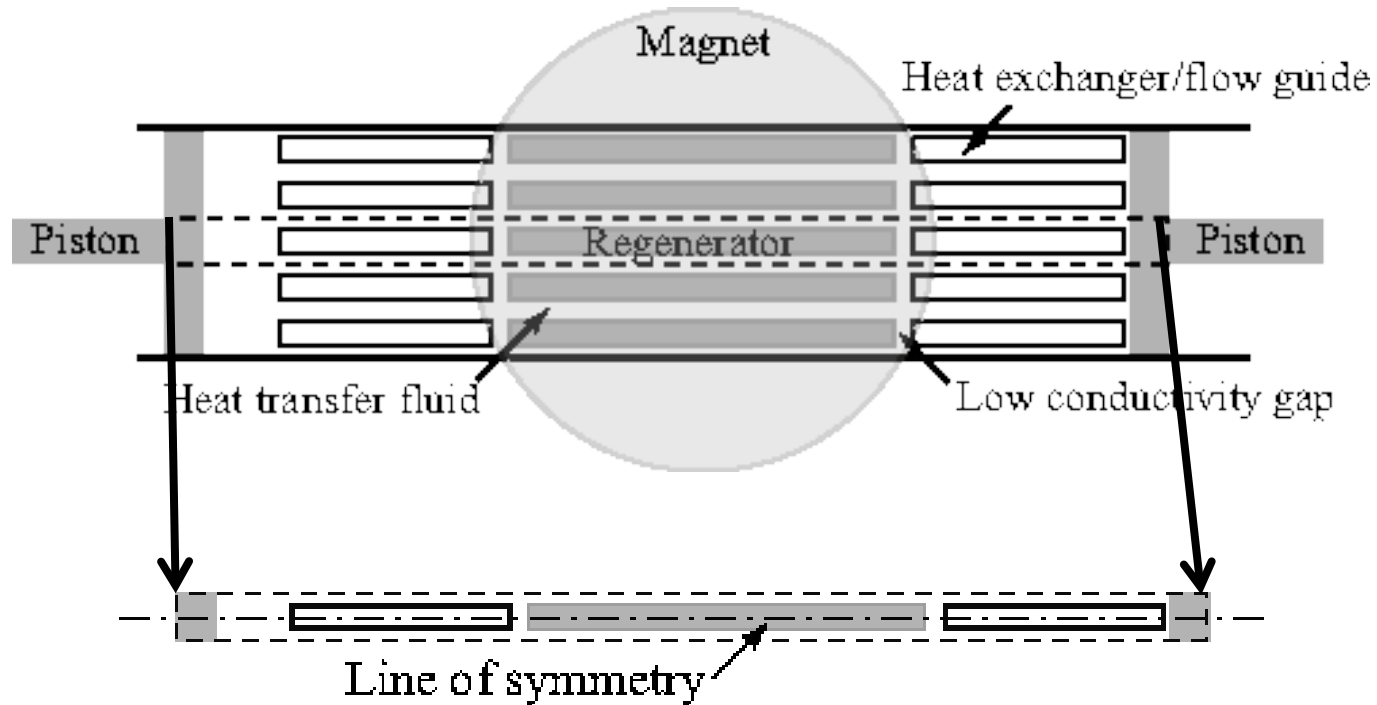

Details of the model

$$\rho_{MCM} c_{p,MCM} \frac{\partial T_{MCM}}{\partial t} = k_{MCM} \nabla^2 T_{MCM} + Q_{MCE} + \frac{T_{\infty} - T_{MCM}}{dV \sum R_{MCM}} + Q_{bdry}$$


$$\rho_{fg} c_{p,fg} \frac{\partial T_{fg,1}}{\partial t} = k_{fg} \nabla^2 T_{fg,1} + \frac{T_{\infty} - T_{fg,1}}{dV \sum R_{fg}} + Q_{bdry}$$

$$\rho_{fg} c_{p,fg} \frac{\partial T_{fg,2}}{\partial t} = k_{fg} \nabla^2 T_{fg,2} + \frac{T_{\infty} - T_{fg,2}}{dV \sum R_{fg}} + Q_{bdry}$$

$$\rho_{fl} c_{p,fl} \left(\frac{\partial T_{fl}}{\partial t} + u \cdot \nabla T_{fl} \right) = k_{fl} \nabla^2 T_{fl} + \frac{T_{\infty} - T_{fl}}{dV \sum R_{fl}} + Q_{bdry}$$

The diagram illustrates a cross-section of a system with three main layers: Flow guide, MCM (Micro Channel Module), and Fluid. The layers are separated by interfaces with thermal resistances $R_{fg} + R_{MCM}$. The bottom boundary is labeled $R_{pist} + R_{conv}$. The diagram is symmetric about a central vertical line, indicated by arrows labeled "Symmetry".

Details of the model

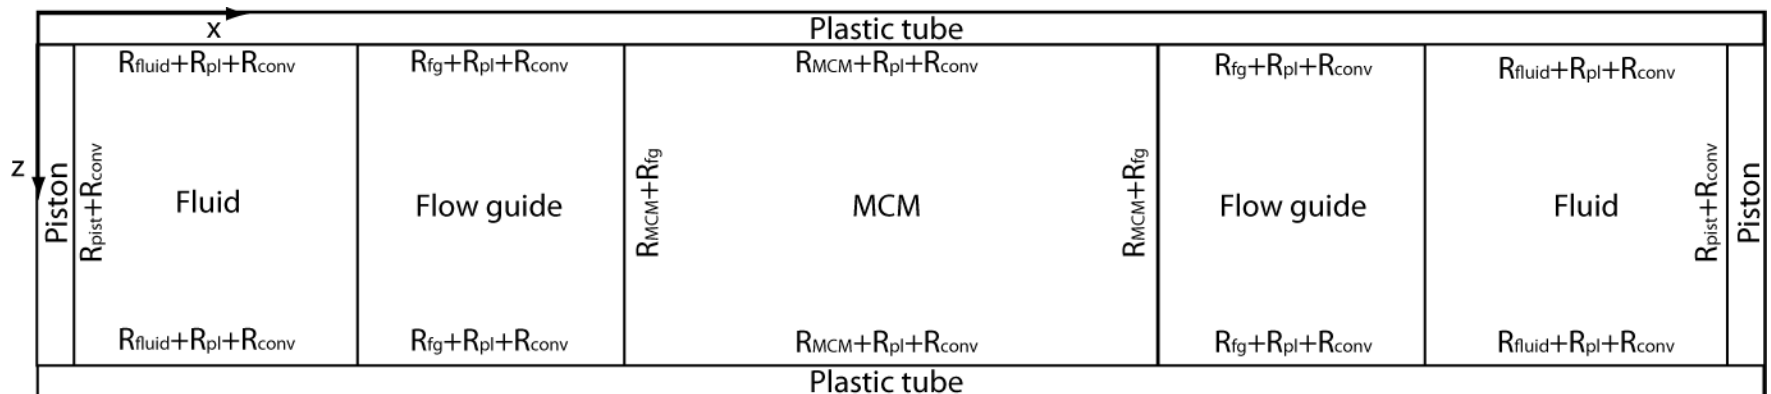


Experiments and modeling


Each experiment was configured as follows

- 13 plates of commercial grade Gd (92 g)
- Plate thickness: 0.9 mm
- Channel thickness: 0.8 mm
- A cycle timing of 9 s


Heat load results

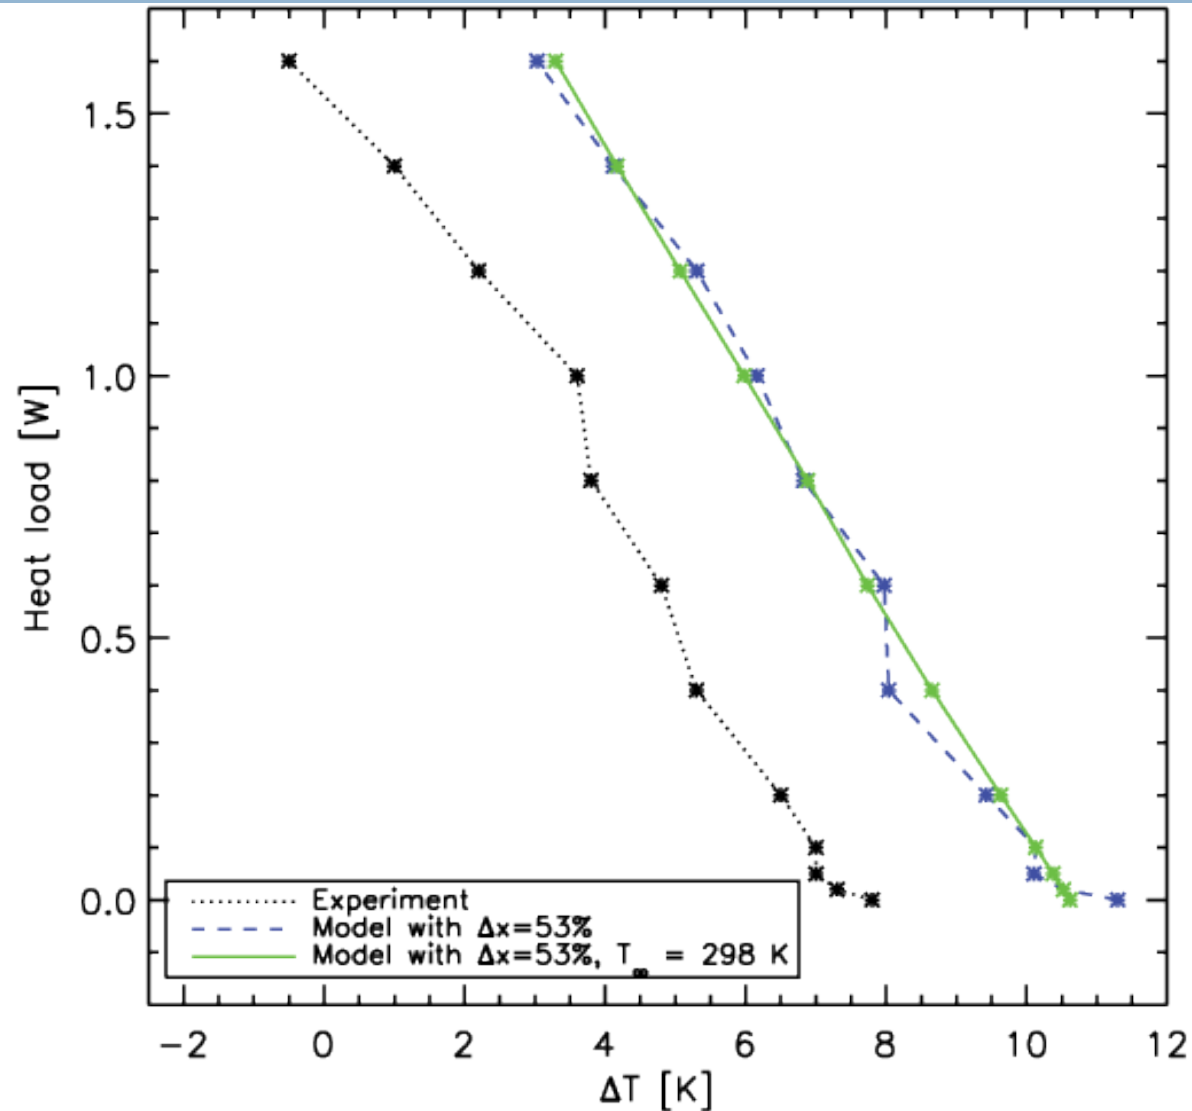

Fluid movement results

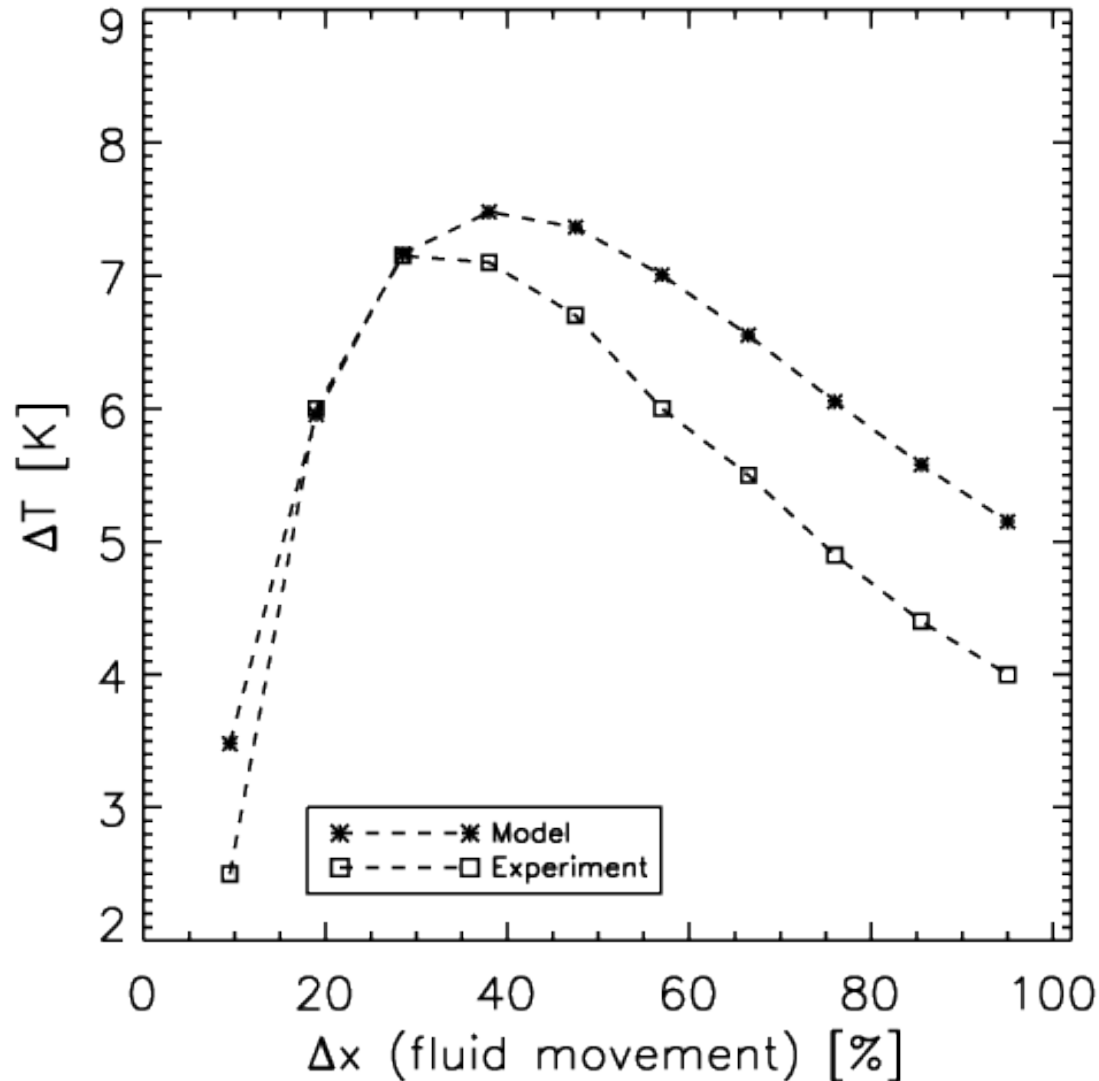

Timing results

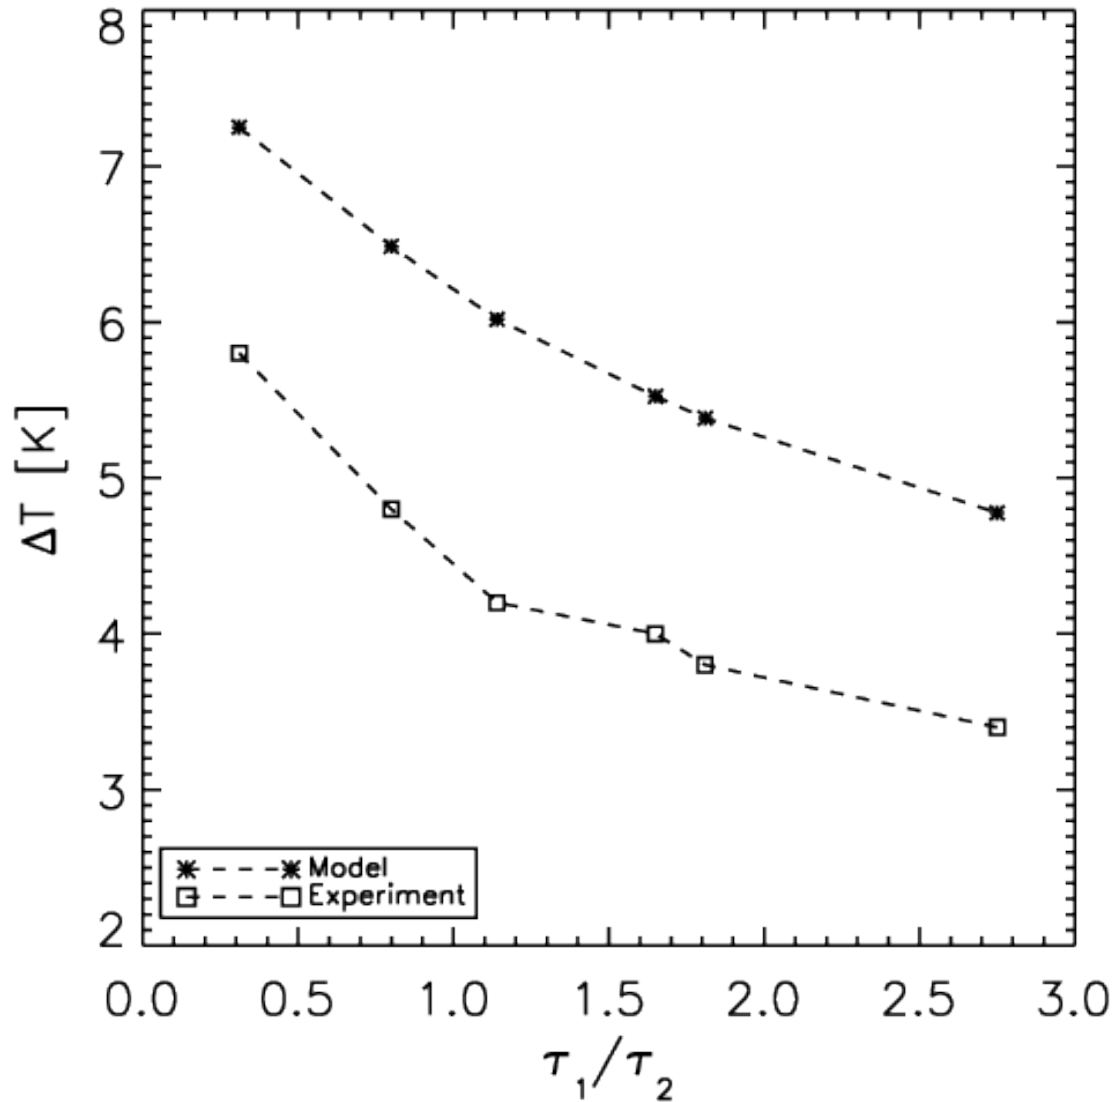

Summary and Conclusion

- A versatile experimental AMR was presented
- A corresponding advanced 2.5D numerical model was described
- Selected results from experiment and model were compared and to a certain extent the agreement is satisfactory

Future work

- Further development of the model to include e.g. passive regeneration and composite materials
- Present large range of experiments with corresponding modeling of various materials
- Detailed study of demagnetization effects
- Work on composite materials

References

- Petersen, T. F.; Pryds, N.; Smith, A.; Hattel, J.; Schmidt, H. & Knudsen, H.
 "Two-dimensional mathematical model of a reciprocating room-temperature
 Active Magnetic Regenerator"
International Journal of Refrigeration, **2008**, 31, 432-443
- Bjørk, R.; Bahl, C. R. H.; Smith, A. & Pryds, N.
 "Optimization and improvement of Halbach cylinder design"
Journal of Applied Physics, AIP, **2008**, 104, 013910
- Bahl, C.; Petersen, T.; Pryds, N. & Smith, A.
 "A versatile magnetic refrigeration test device"
Review of Scientific Instruments, **2008**, 79, 093906