



## Application of engineering models to predict wake deflection due to a tilted wind turbine

Guntur, Srinivas; Troldborg, Niels; Gaunaa, Mac

*Publication date:*  
2012

*Document Version*  
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

*Citation (APA):*  
Guntur, S., Troldborg, N., & Gaunaa, M. (2012). *Application of engineering models to predict wake deflection due to a tilted wind turbine*. Poster session presented at EWEA 2012 - European Wind Energy Conference & Exhibition, Copenhagen, Denmark.

---

### General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

## Abstract

It is a known fact that the power produced by wind turbines operating inside an array decreases due to the wake effects of the upstream turbines. It has been proposed previously to use the yaw mechanism as a potential means to steer the upstream wake away from downstream turbines, however such a mechanism introduces control complications due to changing wind directions. Deflecting the wake in the vertical direction using tilt, on the other hand, overcomes this challenge. In this paper, the feasibility of steering wake is explored in a simple uniform inflow case. This is done by trying to model the wake deflection as a function of the yaw/tilt angle and the rotor thrust, initially using the momentum and vortex theories. Thereafter, a relatively more promising empirical model based on a set of actuator disc CFD computations is proposed. Finally, comments are made on the feasibility of wake control using yaw/tilt.

## Objectives

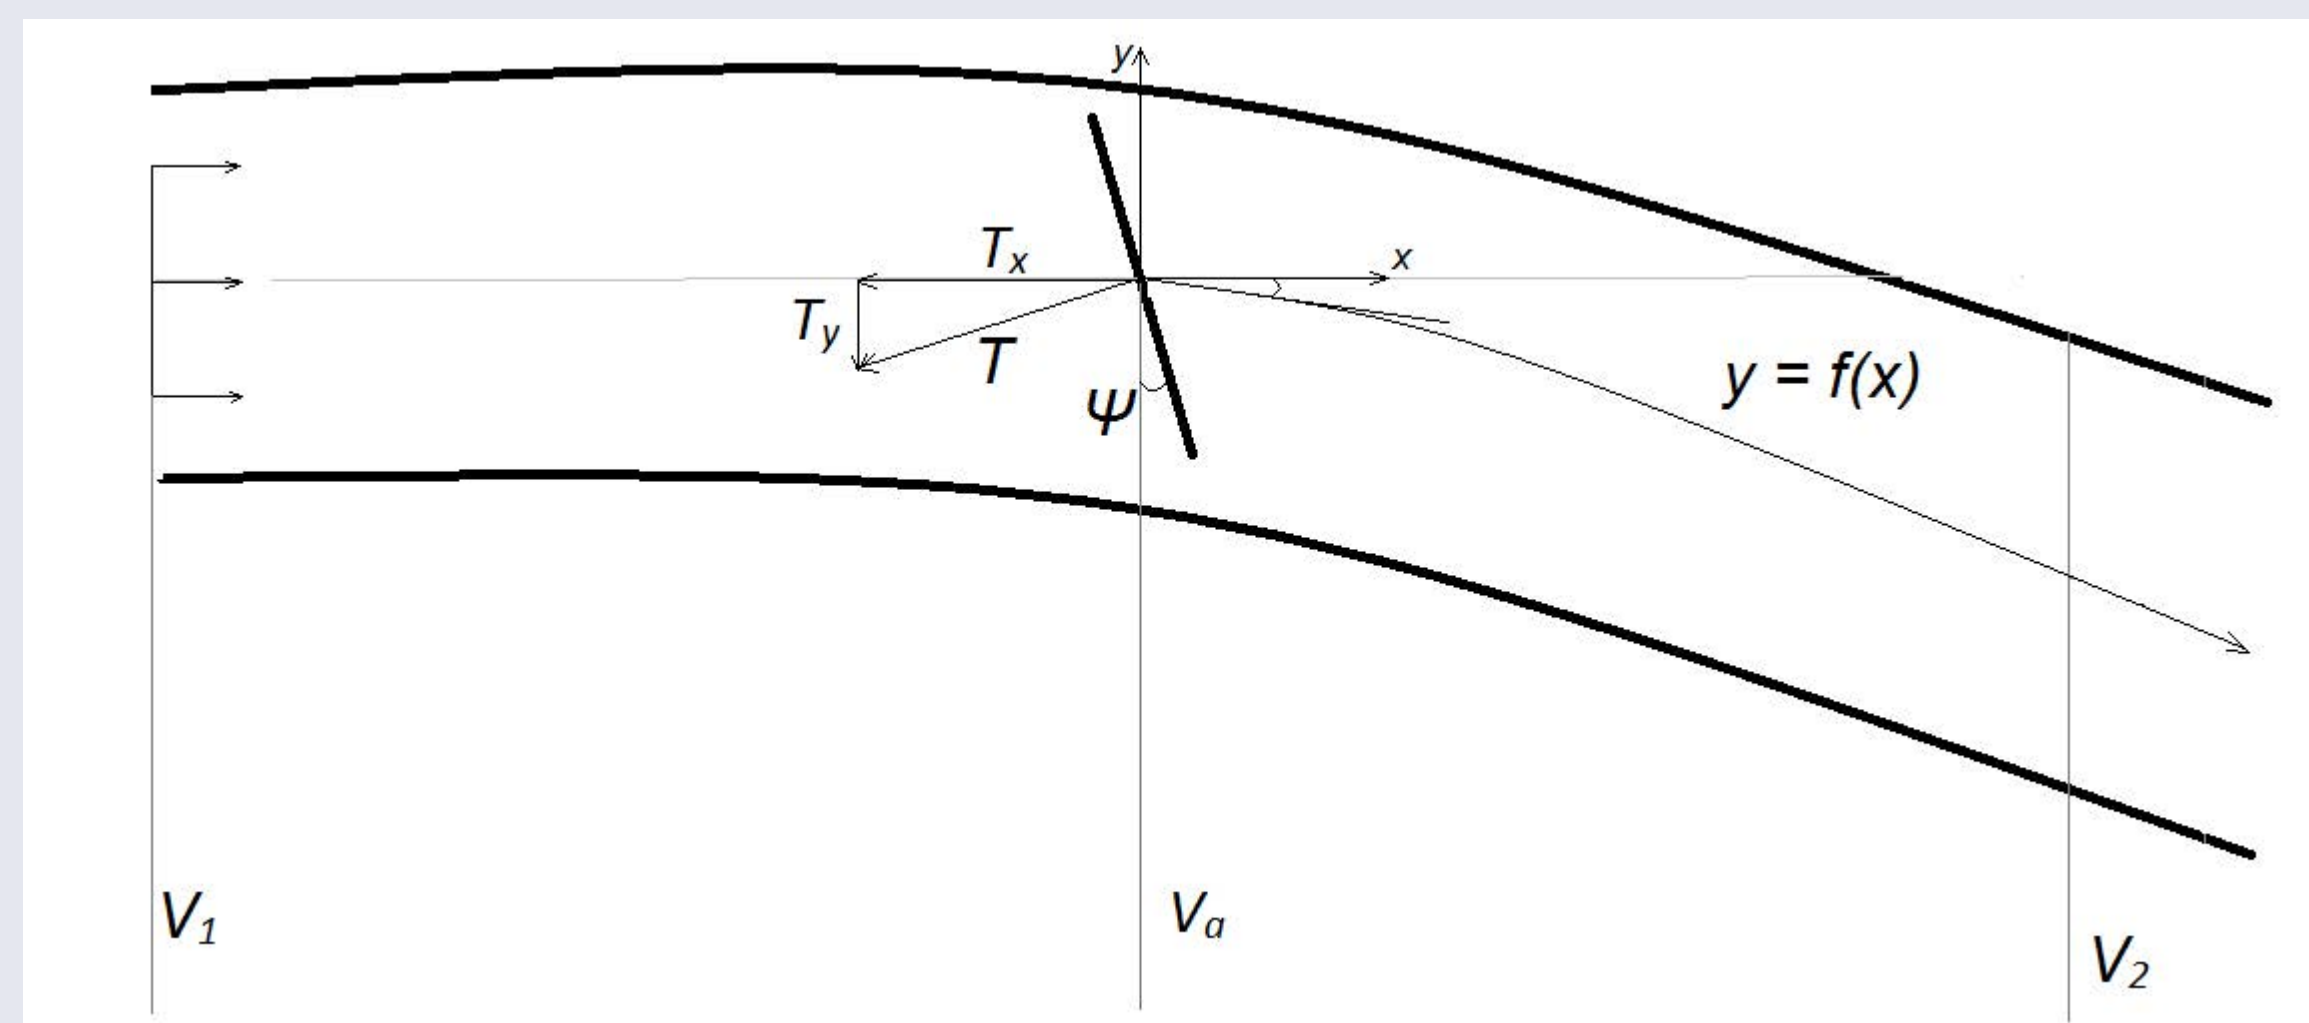


Figure 1: Schematic of the simplified problem

The objective of the current study is to estimate the wake path as a function of the disc loading and the tilt angle, and thereby assess the feasibility of using yaw/tilt as a means to steer the wake away from downstream turbines. This is done using:

1. BEM and vortex based models to derive an analytical expression, and
2. Empirical relations established using data from actuator disc CFD computations.

## Analytical Approach

1. Assumptions:

a) The change in the momenta in the y and the x directions are proportional to the rotor thrust force components in the respective directions:

$$\tan \psi = \frac{a_y}{a_x}$$

b) This relation is true for all x:

$$\tan \psi = \frac{a_y}{a_x} = \frac{a_y(x)}{a_x(x)}$$

2. Consider a rotor operating in axial flow, has one blade with infinite TSR, and is lightly loaded. The axial induction along the centerline can be calculated as a function of downstream distance by a simple vortex model assumption [6], as:

$$a_x(x) = \frac{(1 - \sqrt{1 - C_T})}{2} \left( 1 + \frac{x}{\sqrt{R^2 + x^2}} \right), \text{ and } a_y = a_x \tan \psi$$

## Observations

1. The analytical model does NOT compare well with the CFD data, and therefore assumption (b.) is probably invalid. Figure shown is an example case of  $C_T = 0.64$ ,  $\psi = 30^\circ$ .

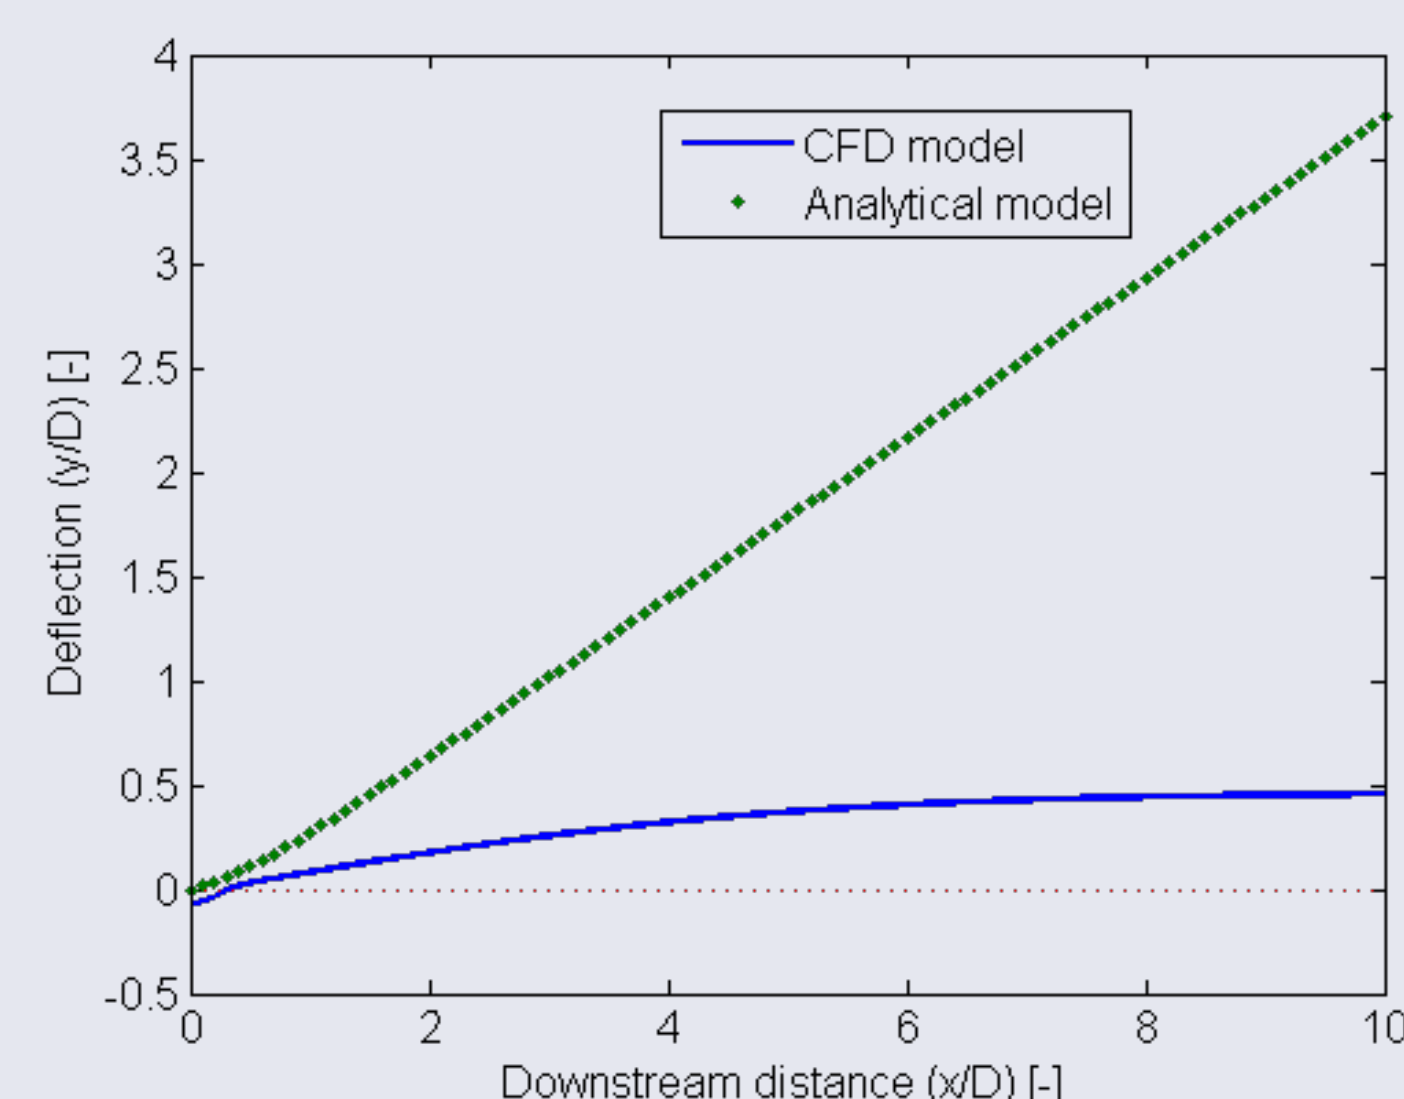


Figure 2: Comparison between the analytical model and CFD data for a test case of  $C_T = 0.64$ ,  $\psi = 30^\circ$ .

2. There exists a self similarity in the wake path function. Figure (2) shows all data from  $C_T = \{0.36, 0.64, 0.80, 0.89\}$ , and  $\psi = \{5, 10, 20, 30\}$ . When this data is normalized as,

$$\tilde{y}(x) = \frac{y}{C_T \tan \psi} = 0.24x$$

interestingly results in a self similarity as shown in figure (3). From this, a new relation between  $y$ ,  $x$ ,  $C_T$  and  $\psi$  can be written as:

$$y(x, C_T, \psi) = 0.24x C_T \tan \psi$$

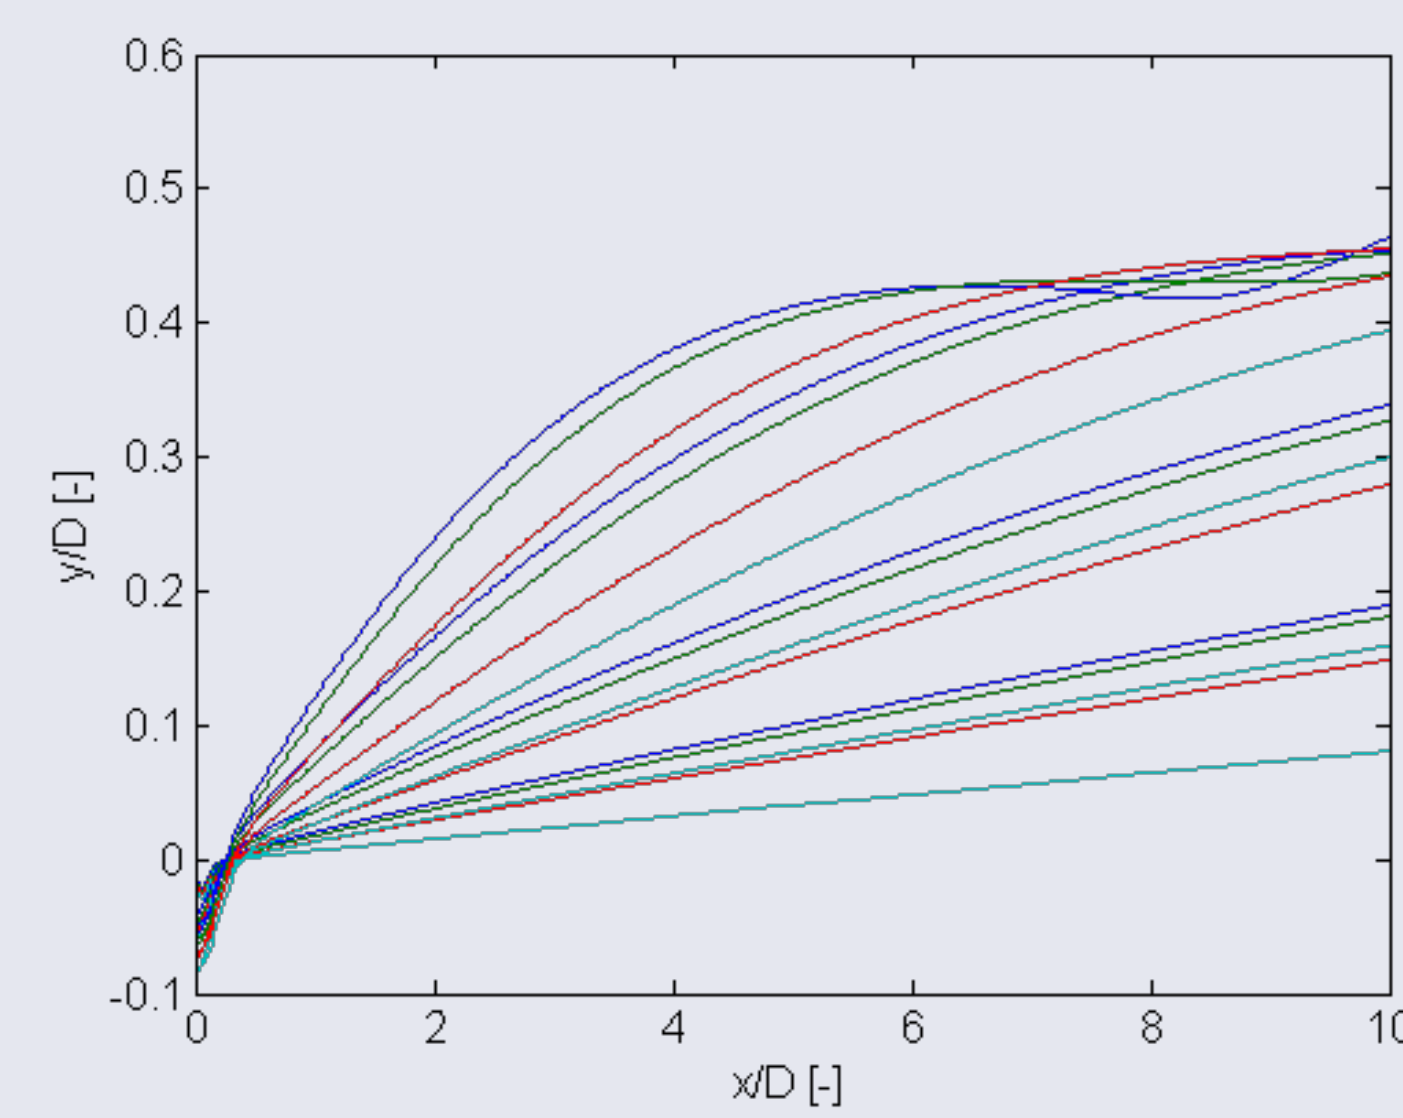


Figure 3: Wake path function plotted for all values of  $C_T$  and  $\psi$ .

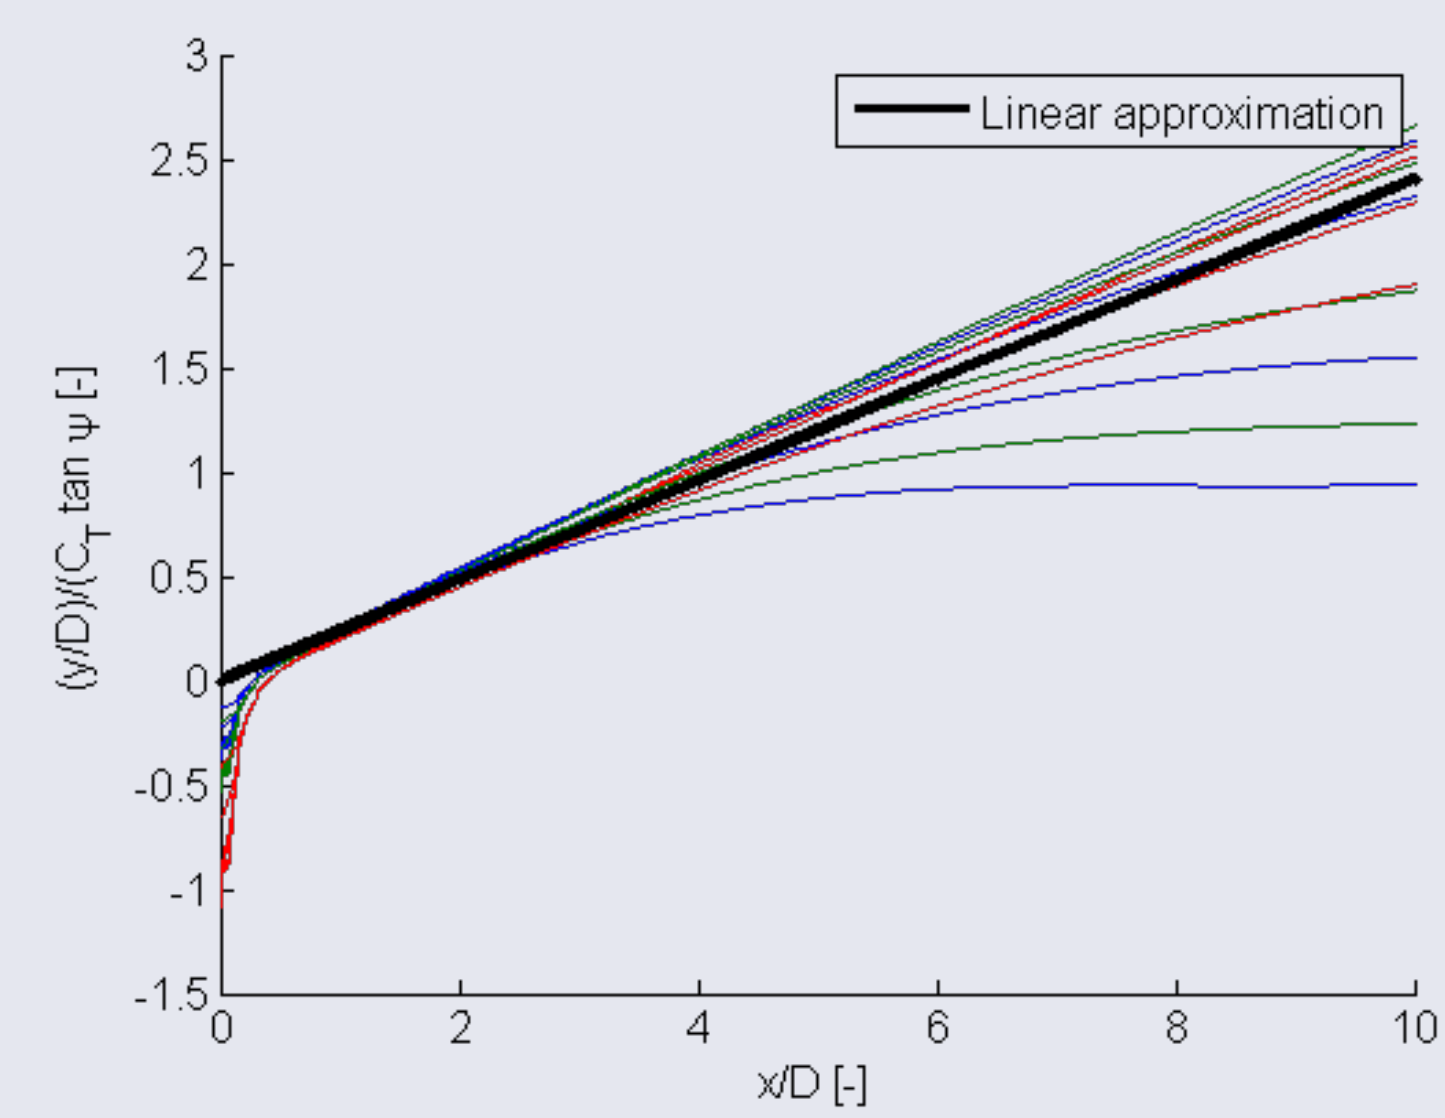


Figure 4: Normalized wake path function.

## Results

Figures (5), (6) and (7) show a comparison between the empirical model and the corresponding CFD data in different cases. The model works reasonably well for low tilt angles. As the tilt angle is increased, the deviation between the model and the CFD data starts to grow, for example see figure (8). In any case, the deflection of the wake obtained using even the highest of the  $\psi$  and  $C_T$  values is only menial, and therefore wake control using tilt (or yaw) seems impractical.

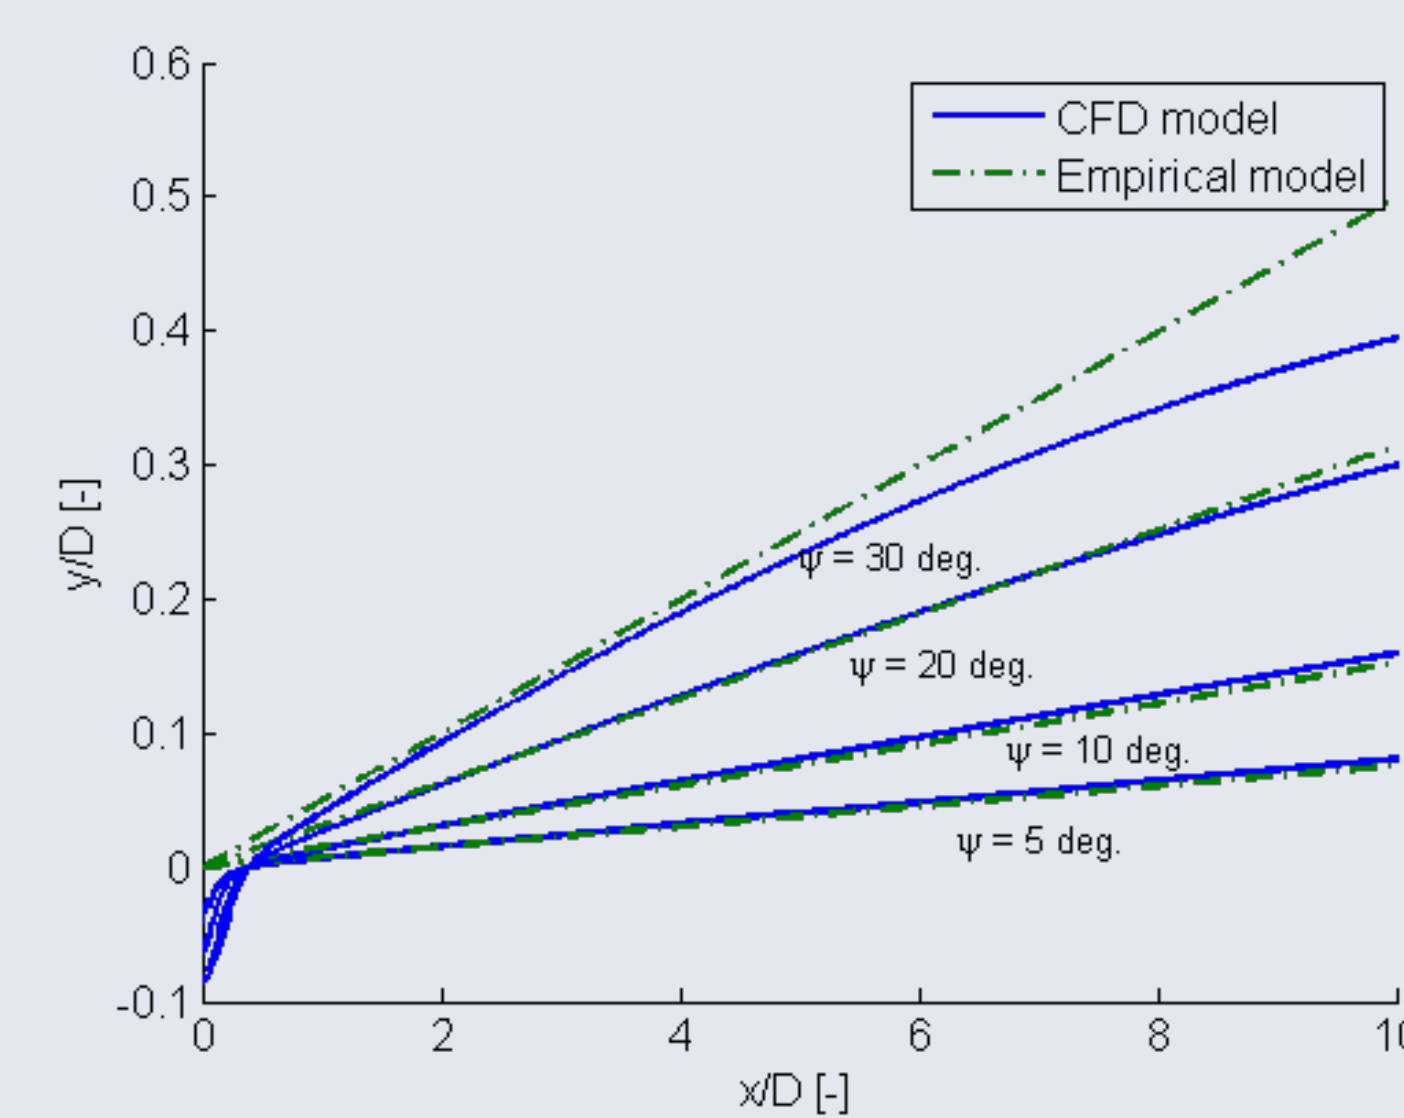


Figure 5:  $C_T = 0.36$ .

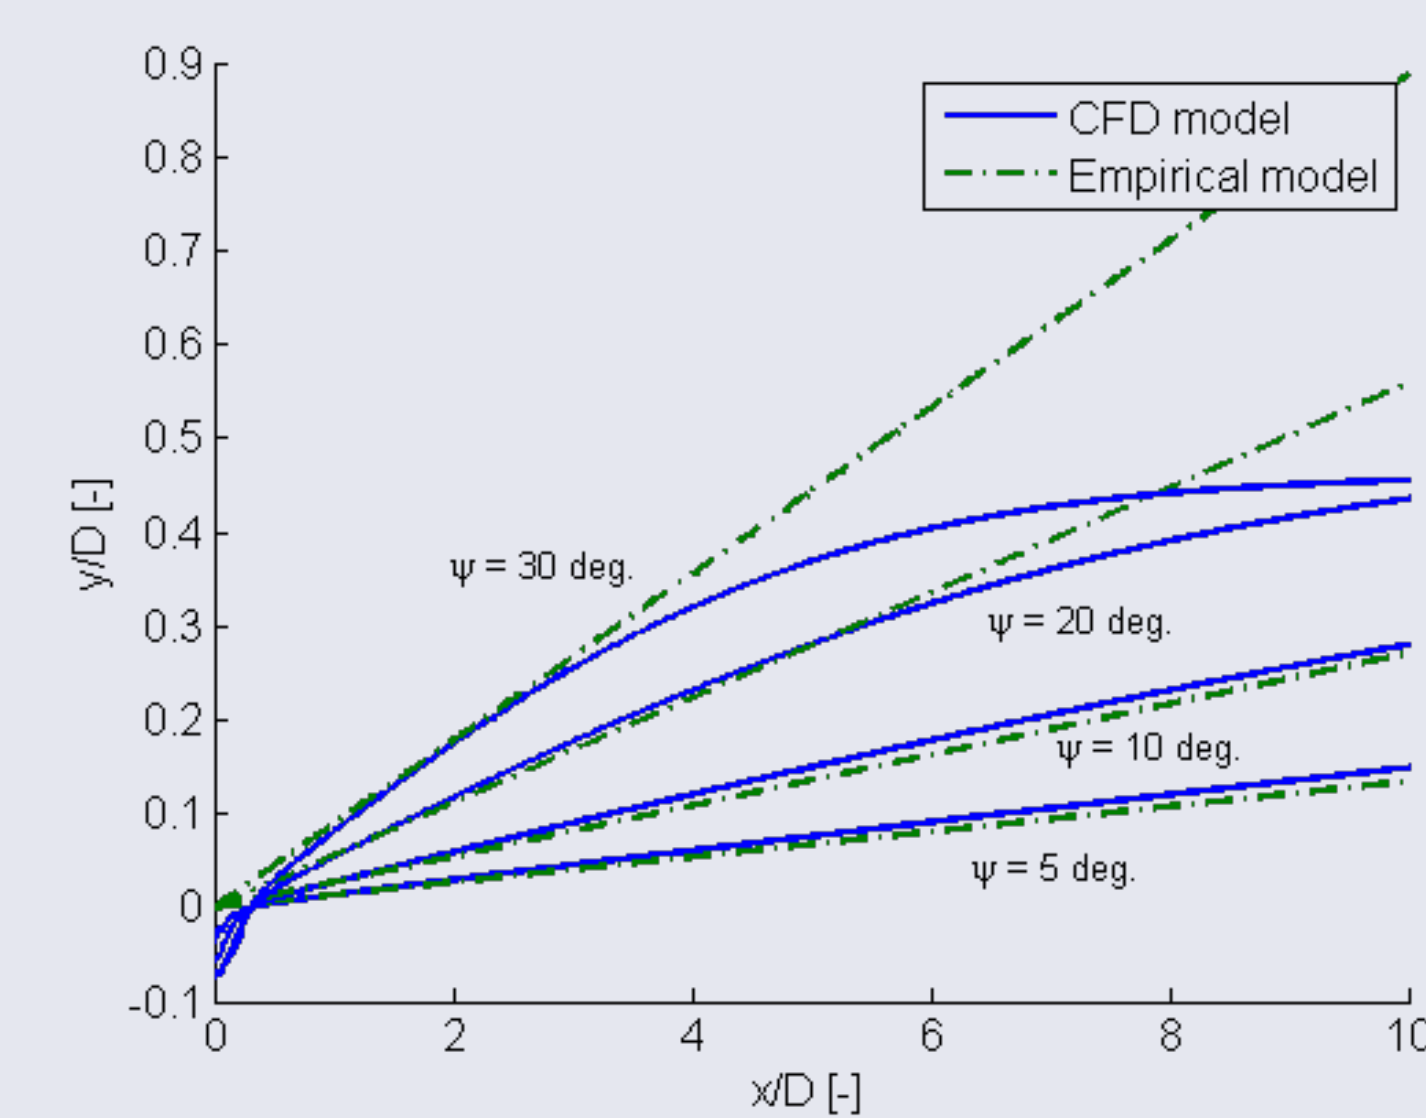


Figure 6:  $C_T = 0.64$ .

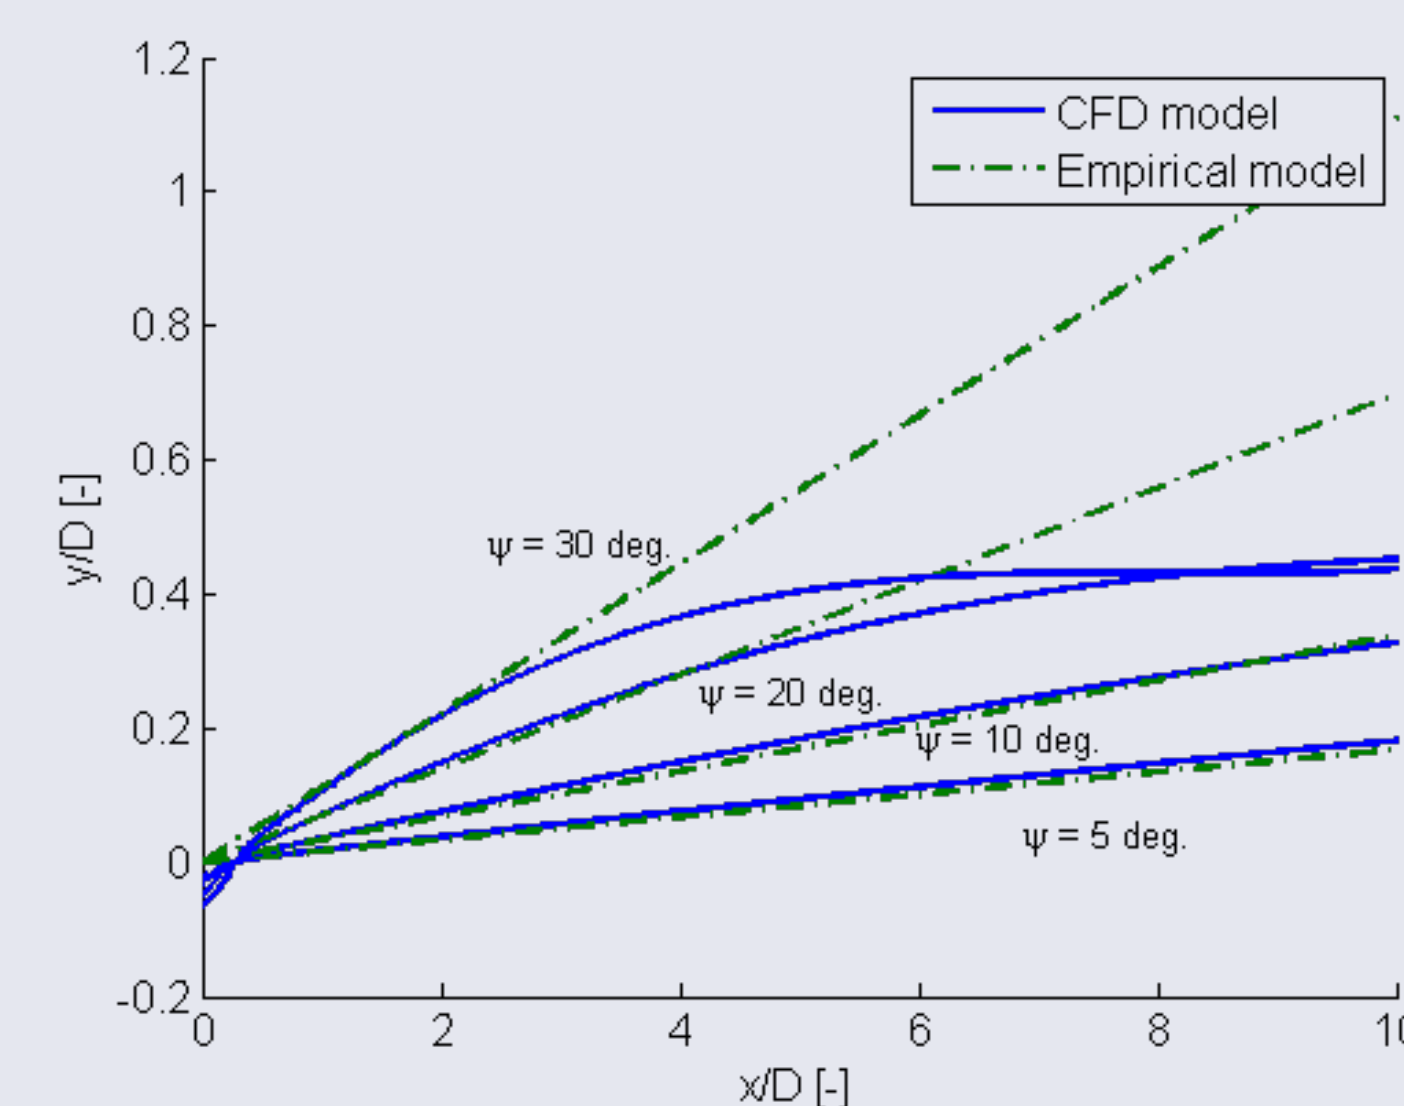


Figure 7:  $C_T = 0.80$ .

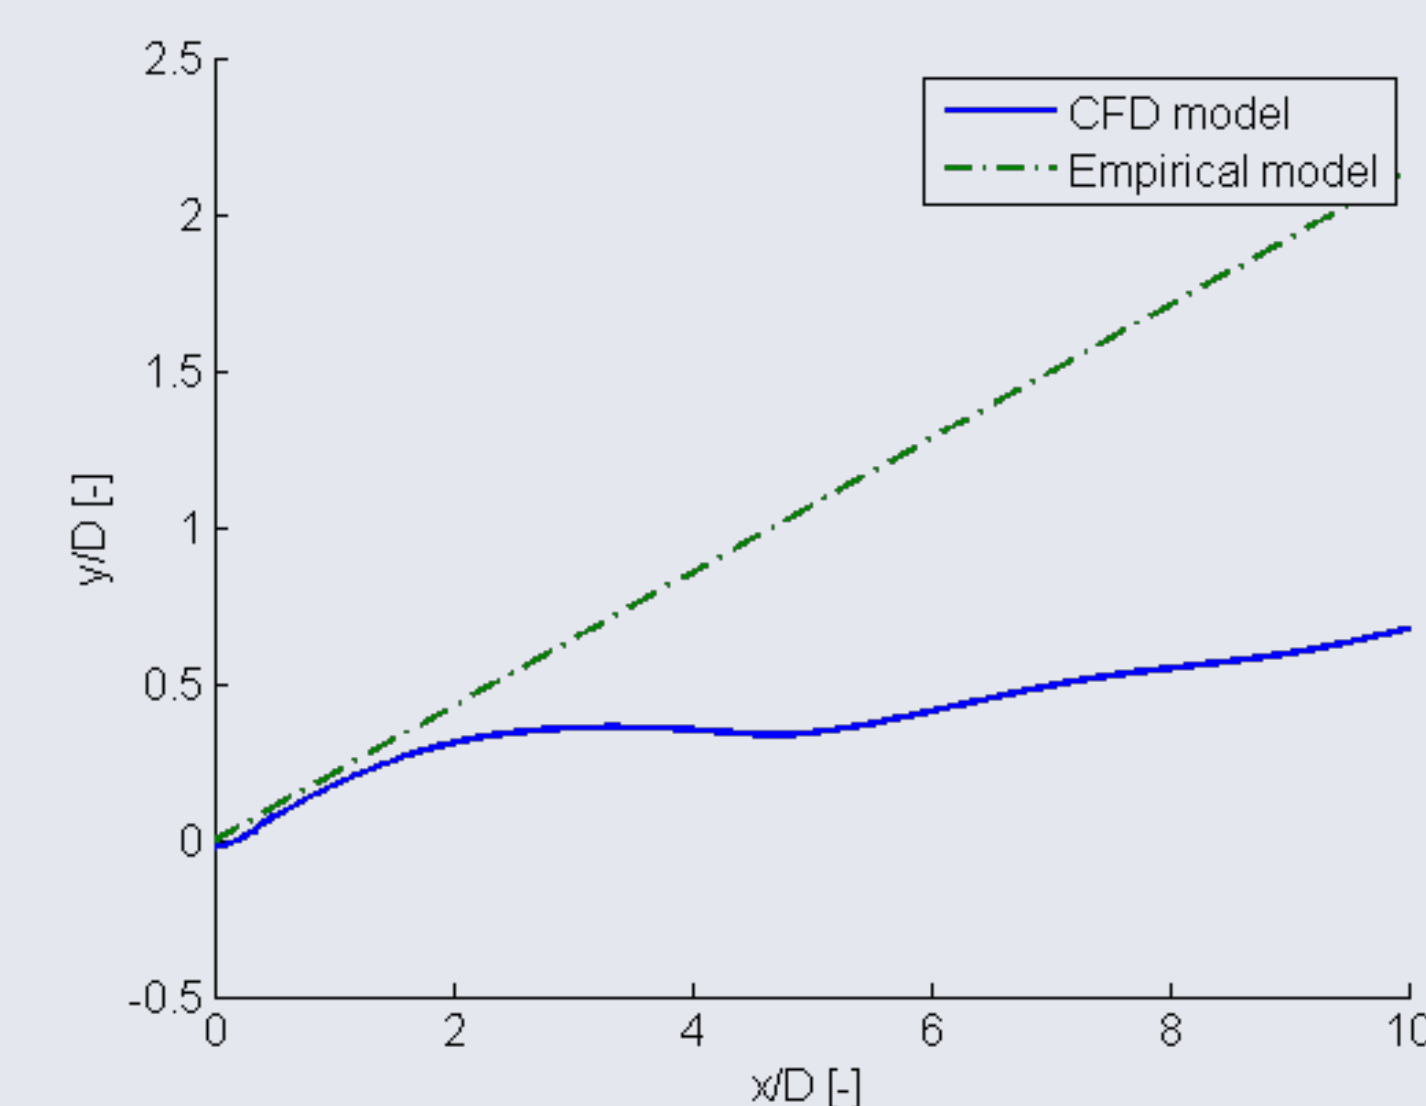


Figure 8:  $C_T = 0.89$ ,  $\psi = 45^\circ$ .

## Conclusions

- The empirical model is believed to give a reasonable estimate for the wake path function for small tilt angles.
- In theory, it is possible to steer the wake away from a downstream turbine, however the amount of tilt and the distance between the turbines required to accomplish this seem to suggest that this concept is rather impractical.
- Meandering and turbulence effects may dominate at larger downstream distances, which makes the control of the turbine based solely on the current concept a challenge.

## References

- [1] Jimenez, A., Crespo, A., and Migoya, E. Application of a LES technique to characterize the wake deflection of a wind turbine in yaw. *Journal of Wind Energy* (13), pp. 559-572, 2010.
- [2] Medici, D. *Wind Turbine Wakes - Control and Vortex Shedding*. Technical report, KTH Mechanics, Royal Institute of Technology, Sweden, 2007.
- [3] Mikkelsen, R., *Actuator Disc Methods Applied to Wind Turbines*. MEK-FM-PHD 2003-02, Technical University of Denmark, 2003.
- [4] Sørensen, N.N., *General Purpose Flow Solver Applied to Flow over Hills*. PhD Dissertation, Risø-R827(EN), Risø National Laboratory, Roskilde, Denmark, 1995.
- [5] Troldborg, N. and Gaunaa, M. Modelling the influence of yaw using a simple vortex rotor model. *EWEC 2012*, Copenhagen. Extended abstract submitted.
- [6] Troldborg, N., Gaunaa, M. and Mikkelsen, R. Actuator Disc Simulations of Influence of Wind Shear on Power Production of Wind Turbines. *Torque conference*, Crete, Greece, 2010.
- [7] Øye, S. A simple vortex model. In *Proc. of the third IEA Symposium on the Aerodynamics of Wind Turbines*, ETSU, Harwell, 1990, p. 4.1-4.15.
- [8] Hansen, M.O.L., *Wind Turbine Aerodynamics*. James & James, UK, 2000.