



Use 200x less material! Solar cells based on the $\text{Cu}_2\text{ZnSnS}_4$ compound

Crovetto, Andrea; Engberg, Sara; Ettliger, Rebecca; Cazzaniga, Andrea; Schou, Jørgen; Hansen, Ole

Published in:

Book of Abstracts. DTU's Sustain Conference 2015

Publication date:

2015

Document Version

Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):

Crovetto, A., Engberg, S., Ettliger, R., Cazzaniga, A., Schou, J., & Hansen, O. (2015). Use 200x less material! Solar cells based on the $\text{Cu}_2\text{ZnSnS}_4$ compound. In *Book of Abstracts. DTU's Sustain Conference 2015* Article M-15 Technical University of Denmark.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Use 200x less material! Solar cells based on the $\text{Cu}_2\text{ZnSnS}_4$ compound

Andrea Crovetto^{*1}, Sara Engberg², Rebecca Ettlinger², Andrea Cazzaniga², Jørgen Schou², Ole Hansen^{1,3}

1: DTU Nanotech; 2: DTU Fotonik; 3: CINF, Center for Individual Nanoparticle Functionality

*Corresponding author email: ancro@nanotech.dtu.dk

For solar energy to really compete with fossil fuels for production of bulk grid power, its cost needs to be further decreased. Conventional silicon-based solar cells have almost reached their theoretical efficiency limit and their cost is dominated by the cost of the high-quality silicon crystal needed for high-efficiency solar cells. The new photovoltaic material $\text{Cu}_2\text{ZnSnS}_4$ (nicknamed 'CZTS') is a promising alternative since it absorbs light about 200 times more strongly than silicon and therefore can be made 200 times thinner, greatly reducing material costs (Figure 1). Further, CZTS only contains earth-abundant, environmentally-friendly elements and requires a lower processing temperature than conventional solar cells, so it is a viable candidate for Terawatt-sized solar energy production. Its potential theoretical efficiency is as high as conventional solar cells (more than 30%), but current record efficiencies are still below 10% [1].

Our strategy is to produce CZTS films by 1) a research-oriented vacuum method (pulsed laser deposition) for studying the material's properties, and 2) an industry-friendly wet chemical method (spin/spray coating of nanocrystals in a liquid solution) for large-scale production. Preliminary conversion efficiencies of 2.1% have been measured on solar cell devices fabricated by our group using a glass/Mo/CZTS/CdS/ZnO/ZnO:Al stack (Figure 1,2) and further optimization is underway.

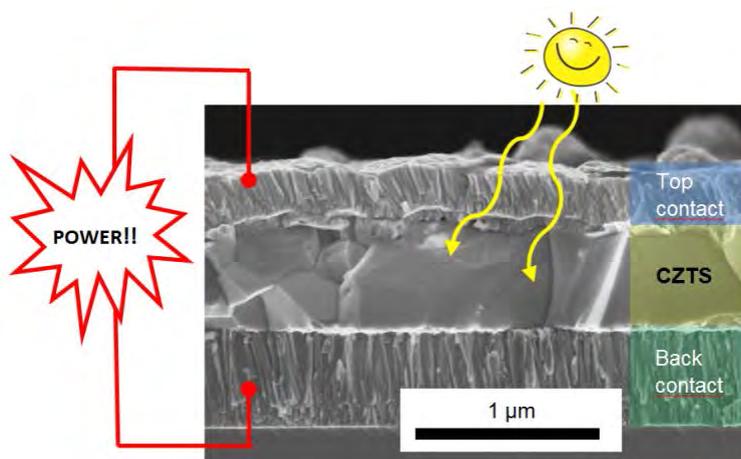


Figure 1. Cross-sectional view of a CZTS solar cell produced by our group.

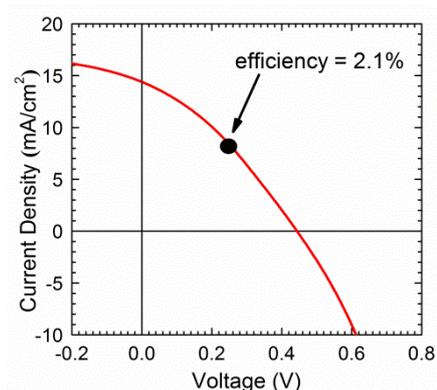


Figure 2. Current-voltage curve of our best solar cell under standard illumination

[1] S. Tajima, T. Itoh, H. Hazama, K. Ohishi, R. Asahi, *Appl. Phys. Express* **2015**, *8*, 082302.